


KDL-32V2000/40V2000/46V2000

SERVICE MANUAL

AUS Model

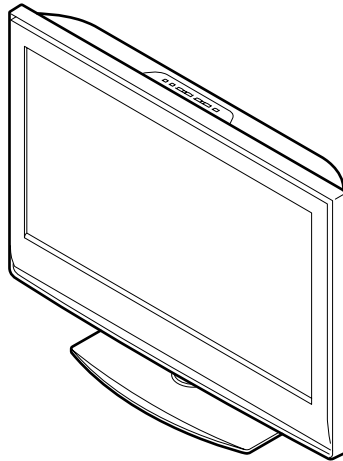

WAX2 CHASSIS

SPECIFICATIONS

Display Unit

Power Requirements:

220–240 V AC, 50 Hz

Screen Size:

KDL-46V2000: 46 inches

KDL-40V2000: 40 inches

KDL-32V2000: 32 inches

Display Resolution:

1,366 dots (horizontal) × 786 lines (vertical)

Power Consumption:

Indicated on the rear of the TV

Dimensions (w × h × d):

KDL-46V2000:

Approx. 1120 × 805 × 334 mm (with stand)

Approx. 1120 × 755 × 116 mm (without stand)

KDL-40V2000:

Approx. 988 × 716 × 334 mm (with stand)

Approx. 988 × 664 × 103 mm (without stand)

KDL-32V2000:

Approx. 792 × 593 × 219 mm (with stand)

Approx. 792 × 546 × 99 mm (without stand)

Weight:

KDL-46V2000:

Approx. 35 kg (with stand)

Approx. 29 kg (without stand)

KDL-40V2000:

Approx. 28 kg (with stand)

Approx. 22 kg (without stand)

KDL-32V2000:

Approx. 18 kg (with stand)

Approx. 16 kg (without stand)

Panel System

LCD (Liquid Crystal Display) Panel

TV System

Analog: B/G, I, D/K, M

Digital: DVB-T

Color/Video System

Analog: PAL, PAL60, SECAM, NTSC4.43, NTSC 3.58

Digital: MP@HL and MP@ML

Antenna

75 ohm external terminals

Channel Coverage

Analog: B/G

VHF: E2 to E12 / UHF: E21 to E69 /

CATV: S01 to S03, S1 to S41

VHF: 0 to 12, 5A, 9A / UHF: 28 to 69 /

CATV: S01 to S03, S1 to S44 (Australia only)

VHF: 1 to 11 / UHF: 21 to 69 /

CATV: S01 to S03, S1 to S41 (New Zealand only)

I

UHF: B21 to B69 / CATV: S01 to S03, S1 to S41

D/K

VHF: C1 to C12, R1 to R12 /

UHF: C13 to C57, R21 to R60 /

CATV: S01 to S03, S1 to S41, Z1 to Z39

M

VHF: A2 to A13 / UHF: A14 to A79 /

CATV: A-8 to A-2, A to W+4, W+6 to W+84

Digital: VHF/UHF

LCD Digital Color TV

SONY®

Terminals

S VIDEO 1/2: S-Ⓜ

S VIDEO (4-pin mini DIN): S-Ⓜ

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

C: 0.286 Vp-p (Burst signal), 75ohms

VIDEO IN 1/2/3: Ⓜ

VIDEO: Ⓜ

1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: Ⓜ

500 mVrms

Impedance: 47 kilohms

HD/DVD IN: Ⓜ

Y, PB/CB, PR/CR (Component Video):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

PB/CB: 0.7 Vp-p, 75 ohms

PR/CR: 0.7 Vp-p, 75 ohms

Signal format: 480i, 576i, 480p, 576p, 720p, 1080i

AUDIO: Ⓜ

500 mVrms

Impedance: 47 kilohms

VIDEO OUT: Ⓜ

VIDEO: Ⓜ

1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: Ⓜ

More than 1 Vrms at the maximum volume setting
(Variable)

More than 500 mVrms (Fixed)

DIGITAL OUT (OPTICAL) (DIGITAL OUT (OPTICAL) jack)

HDMI IN

Video: 1080i, 720p, 576p, 576i, 480p, 480i

Audio: Two channel linear PCM

33, 44.1 and 48 kHz, 16, 20 and 24 bits

PC: Ⓜ

D-sub 15-pin, analog RGB, 0.7 Vp-p,

75 ohms, positive

See the PC Input Signal Reference Chart on page 38.

AUDIO: Ⓜ

Stereo minijack, 0.5 Vrms, 1 kilohm

Headphones Ⓜ

Stereo minijack

Sound Output

10 W + 10 W

Supplied Accessories

Refer to “1: Checking the accessories” on page 4.

Optional Accessories

- Wall-Mount Bracket
SU-WL51 (for KDL-46V2000/KDL-40V2000)
SU-WL31 (for KDL-32V2000)

Design and specifications are subject to change without notice.

PC Input Signal Reference Chart

Signals	Horizontal (Pixel)	Vertical (Line)	Horizontal frequency (kHz)	Vertical frequency (Hz)	Standard
VGA	640	480	31.5	60	VGA
	640	480	37.5	75	VESA
	720	400	31.5	70	VGA-T
SVGA	800	600	37.9	60	VESA Guidelines
	800	600	46.9	75	VESA
XGA	1024	768	48.4	60	VESA Guidelines
	1024	768	56.5	70	VESA
	1024	768	60	75	VESA
WXGA	1280	768	47.4	60	VESA
	1280	768	47.8	60	VESA
	1360	768	47.7	60	VESA

- This TV's PC input does not support Sync on Green or Composite Sync.
- This TV's PC input does not support interlaced signals.
- For the best picture quality, it is recommended to use the signals (boldfaced) in the above chart with a 60 Hz vertical frequency from a personal computer. In plug and play, signals with a 60 Hz vertical frequency will be selected automatically.

i-Plate Display Language Code

Code	Language	Code	Language	Code	Language	Code	Language
Af	Afrikaans	El	Greek	Ita	Italian	Spa	Spanish
Afr	Afrikaans	Ell	Greek	Jpn	Japanese	Tam	Tamil
Ar	Arabic	En	English	Kan	Kannada	Tel	Telugu
Ara	Arabic	Eng	English	Kor	Korean	Zho	Chinese
Aus	Australian	Fr	French	Mal	Malayalam	U1	Unknown 1
Ben	Bengali	Fra	French	Nl	Dutch	U2	Unknown 2
Bn	Bengali	Fre	French	Nld	Dutch		
Chi	Chinese	Gem	German	Pan	Panjabi		
De	German	Ger	German	Por	Portuguese		
Deu	German	Gre	Greek	Raj	Rajasthani		
Dut	Dutch	Hi	Hindi	Rus	Russian		
Egy	Egyptian	Hin	Hindi	San	Sanskrit		

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or touching high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instructions.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low voltage scale.
The Simpson's 250 and Sanwa SH-63TRD are examples of passive VOMs that are suitable. Nearly all battery-operated digital multimeters that have a 2 VAC range are suitable (see Figure A).

How to Find a Good Earth Ground

A cold-water pipe is a guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms.

If a cold-water pipe is not accessible, connect a 60- to 100-watt trouble- light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side on the line; the lamp should light at normal brilliance if the screw is at ground potential (see Figure B).

Leakage Test

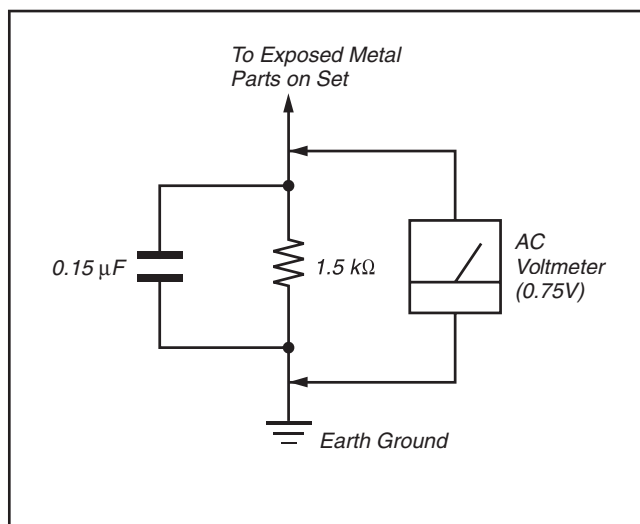


Figure A. Using an AC voltmeter to check AC leakage.

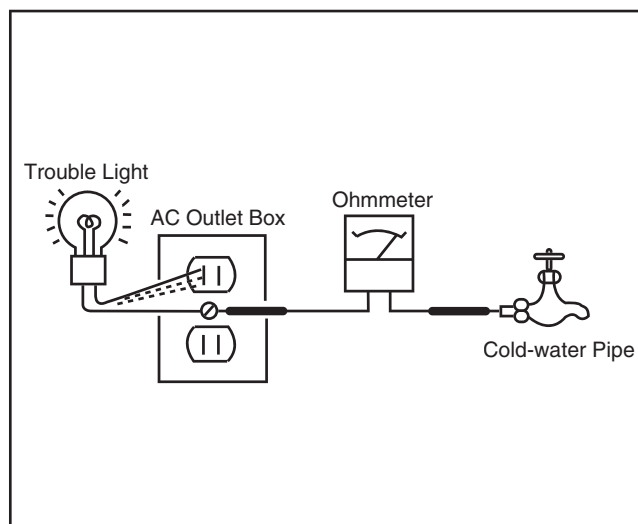


Figure B. Checking for earth ground.


TABLE OF CONTENTS

1. DISASSEMBLY	1-1	3. EXPLODED VIEWS	3-1
1-1. KDL-32V2000	1-1	3-1. KDL-32V2000	3-2
1-1-1. REAR COVER REMOVAL	1-1	3-1-1. REAR COVER ASSY AND STAND ASSY ..	3-2
1-1-2. STAND ASSY AND VESA BRACKET REMOVAL	1-1	3-1-2. H1 AND H2 BOARDS AND FRAME	3-3
1-1-3. H1 BOARD REMOVAL	1-2	3-1-3. CHASSIS-1	3-4
1-1-4. H2 BOARD AND SIDE TERMINAL REMOVAL	1-2	3-1-4. CHASSIS-2	3-5
1-1-5. G1 BOARD REMOVAL	1-3	3-1-5. H4 BOARD AND SPEAKER	3-6
1-1-6. TOP SHIELD REMOVAL	1-3	3-1-6. BEZEL ASSY AND LCD PANEL	3-7
1-1-7. TUG BOARD REMOVAL	1-4	3-2. KDL-40/46V2000	3-8
1-1-8. AG BOARD REMOVAL	1-4	3-2-1. REAR COVER ASSY AND STAND ASSY ..	3-8
1-1-9. BU BOARD REMOVAL	1-5	3-2-2. CHASSIA-1	3-9
1-1-10. AC INLET REMOVAL	1-6	3-2-3. CHASSIS-1	3-10
1-1-11. H4 BOARD AND SPEAKER REMOVAL	1-6	3-2-4. CHASSIS-2	3-11
1-1-12. LCD PANEL REMOVAL	1-7	3-2-5. SPEAKER AND H4 BOARD	3-12
1-2. KDL-40/46V2000	1-8	3-2-6. BEZEL ASSY AND LCD PANEL	3-13
1-2-1. REAR COVER ASSY REMOVAL	1-8	3-3. PACKING MATERIALS (KDL-32V2000)	3-14
1-2-2. STAND ASSY AND VESA BRACKET REMOVAL	1-8	3-4. PACKING MATERIALS (KDL-40/46V2000) ..	3-15
1-2-3. H1 BOARD REMOVAL	1-9		
1-2-4. H2 BOARD REMOVAL	1-9	4. ELECTRICAL PARTS LIST	4-1
1-2-5. G2 BOARD REMOVAL	1-10		
1-2-6. DTT SHIELD REMOVAL	1-10		
1-2-7. TUG BOARD REMOVAL	1-11		
1-2-8. AU BOARD REMOVAL	1-11		
1-2-9. B BOARD REMOVAL	1-12		
1-2-10. AC INLET REMOVAL	1-13		
1-2-11. H4 BOARD AND SPEAKER REMOVAL ..	1-13		
1-2-12. TOP FRAME REMOVAL	1-14		
1-2-13. LCD PANEL REMOVAL	1-15		
2. DIAGRAMS	2-1		
2-1. BLOCK DIAGRAMS	2-1		
(1) AG, H2 and H46 Boards	2-1		
(2) B, H1, H4 and J Boards	2-2		
(3) TUG Board	2-3		
(4) G1 Board	2-4		
(5) G2A Board	2-5		
2-2. FRAME DIAGRAMS	2-6		
(1) KDL-32V2000	2-6		
2-7			
(2) KDL-40/46V2000	2-7		
2-3. CIRCUIT BOARDS LOCATION	2-8		
2-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS	2-8		
(1) AG Board (1/2-2/2)	2-9		
(2) B Board (1/12-12/12)	2-12		
(3) G1 Board (KDL-32V2000)	2-26		
(4) G2A Board (KDL-40/46V2000)	2-28		
(5) H1 and H4 Boards	2-30		
(6) H2 and H46 Boards	2-32		
(7) TUG and J Board	2-34		
2-5. SEMICONDUCTORS	2-36		


SECTION 1 DISASSEMBLY

1-1. KDL-32V2000

1-1-1. REAR COVER REMOVAL

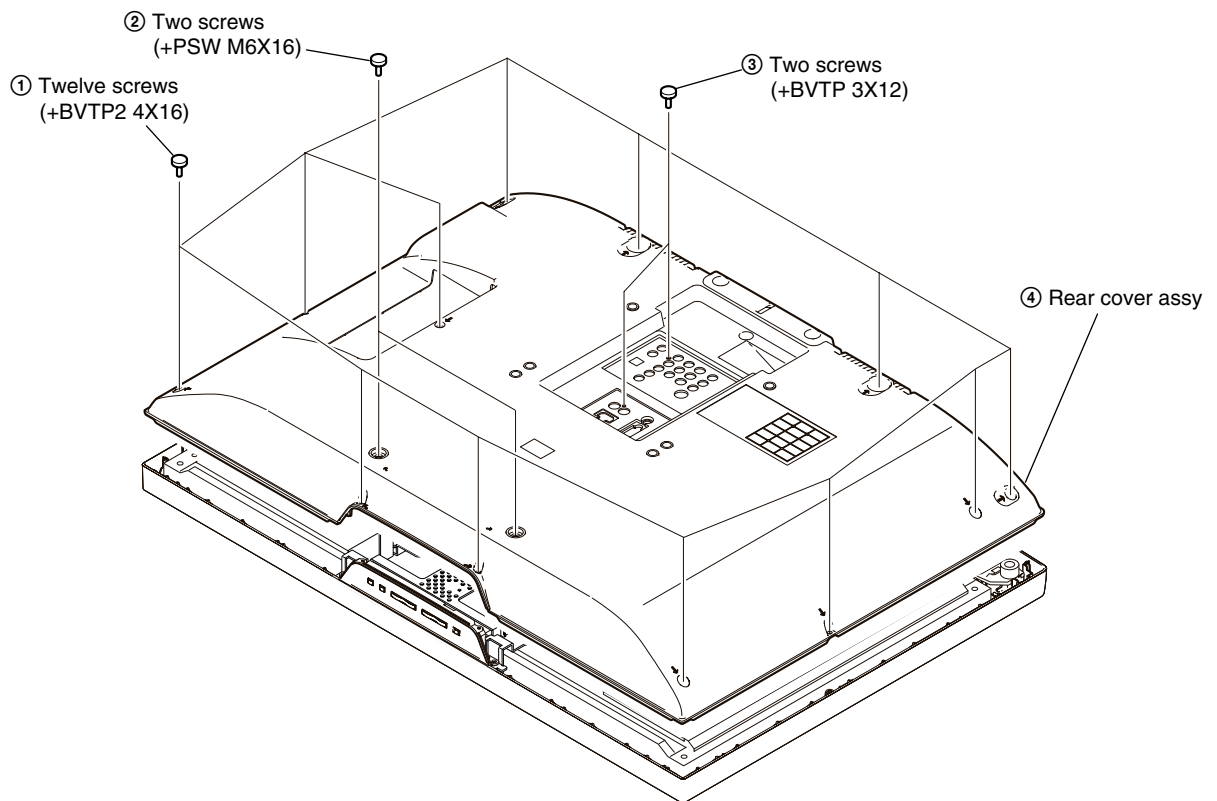


1-1-2. STAND ASSY AND VESA BRACKET REMOVAL

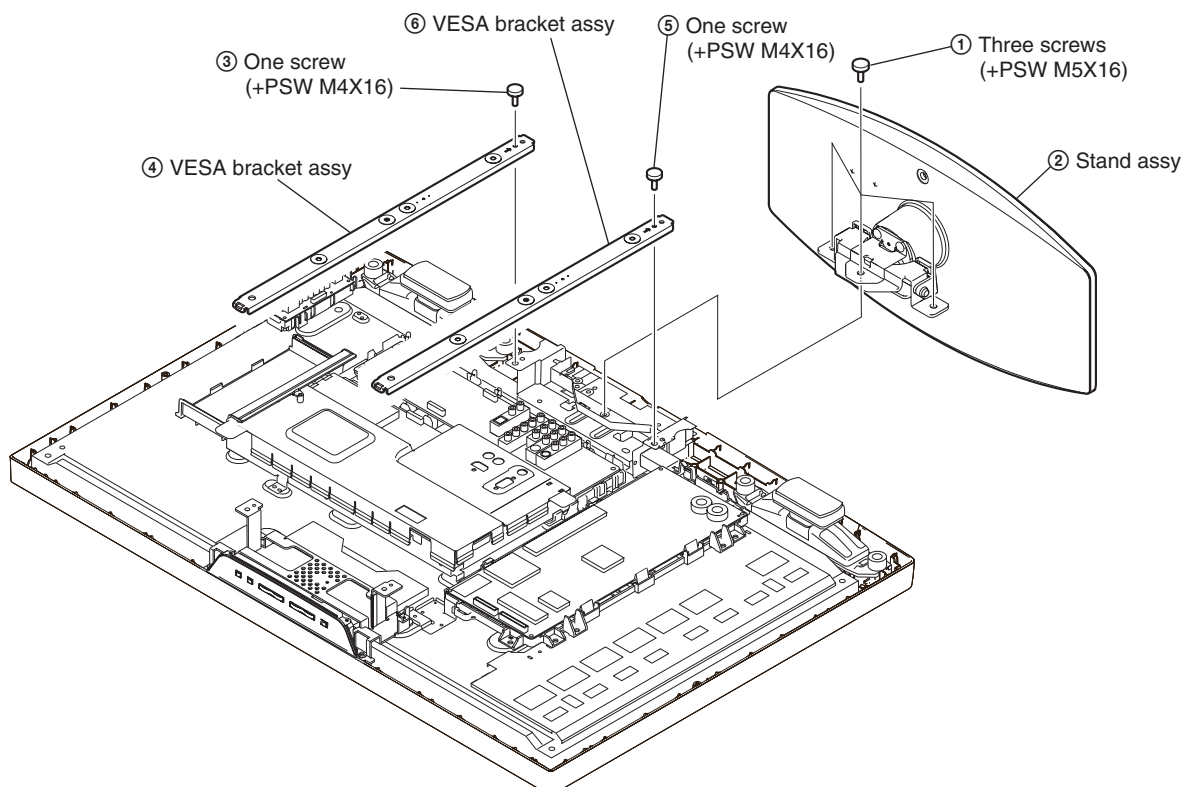


KDL-32V2000

1-1-3. H1 BOARD REMOVAL

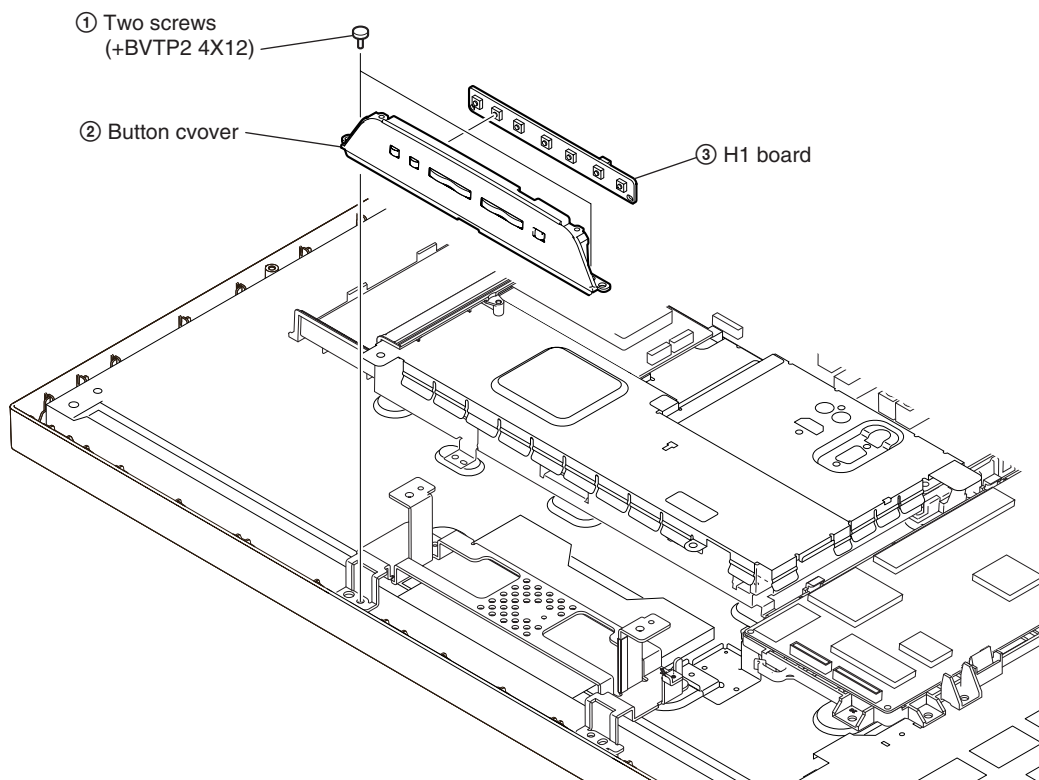


1-1-4. H2 BOARD AND SIDE TERMINAL REMOVAL

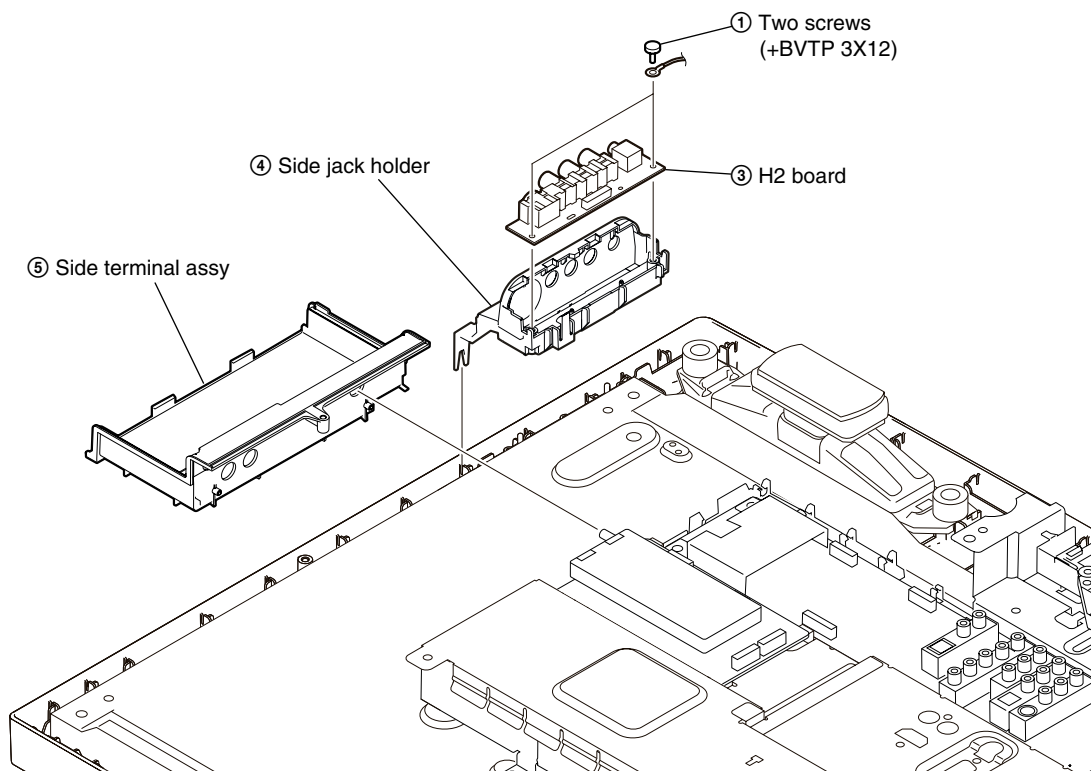


KDL-32V2000

1-1-5. G1 BOARD REMOVAL

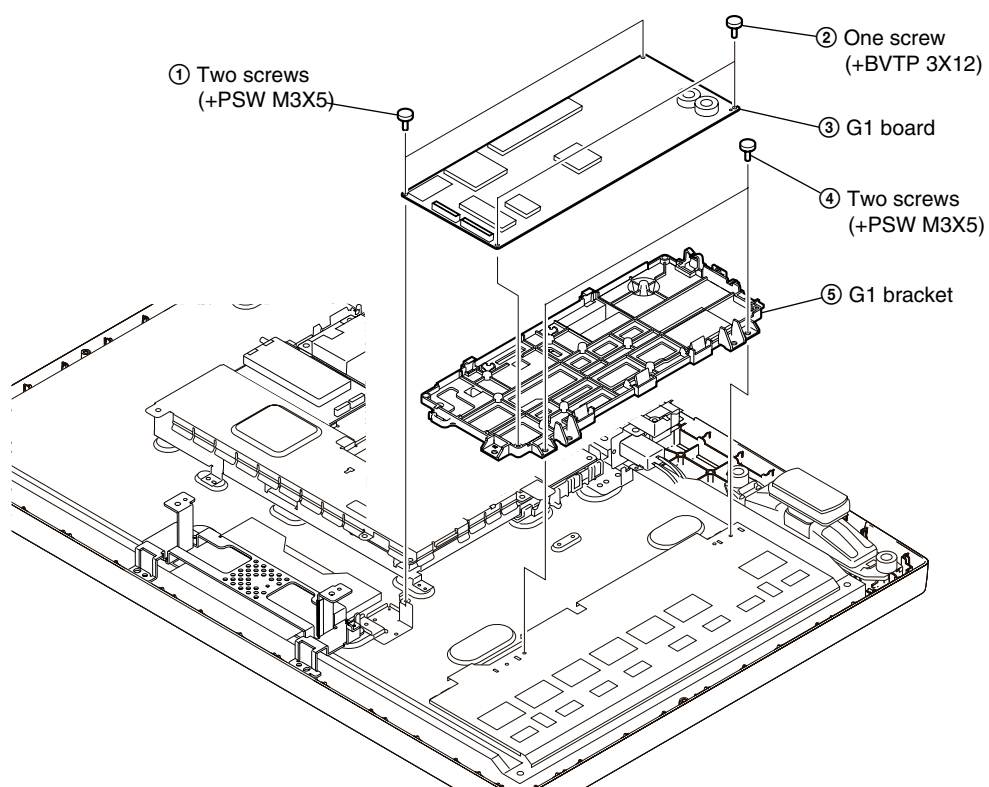


1-1-6. TOP SHIELD REMOVAL

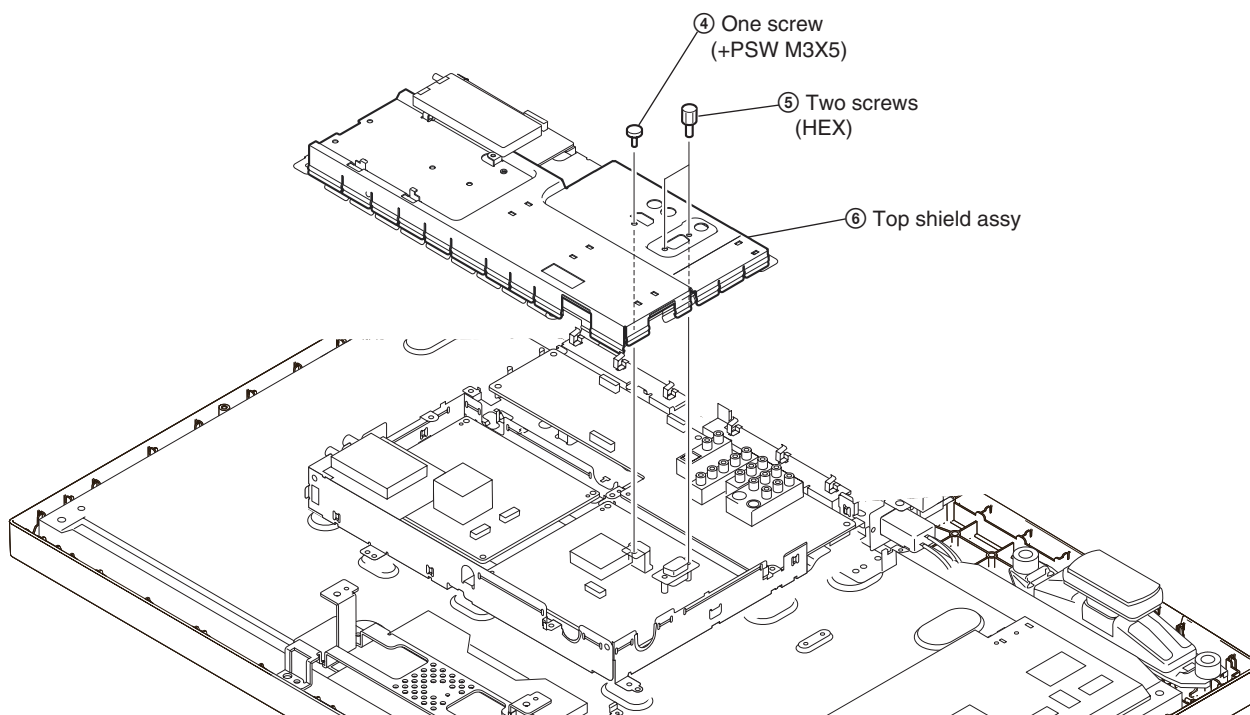


KDL-32V2000

1-1-7. TUG BOARD REMOVAL

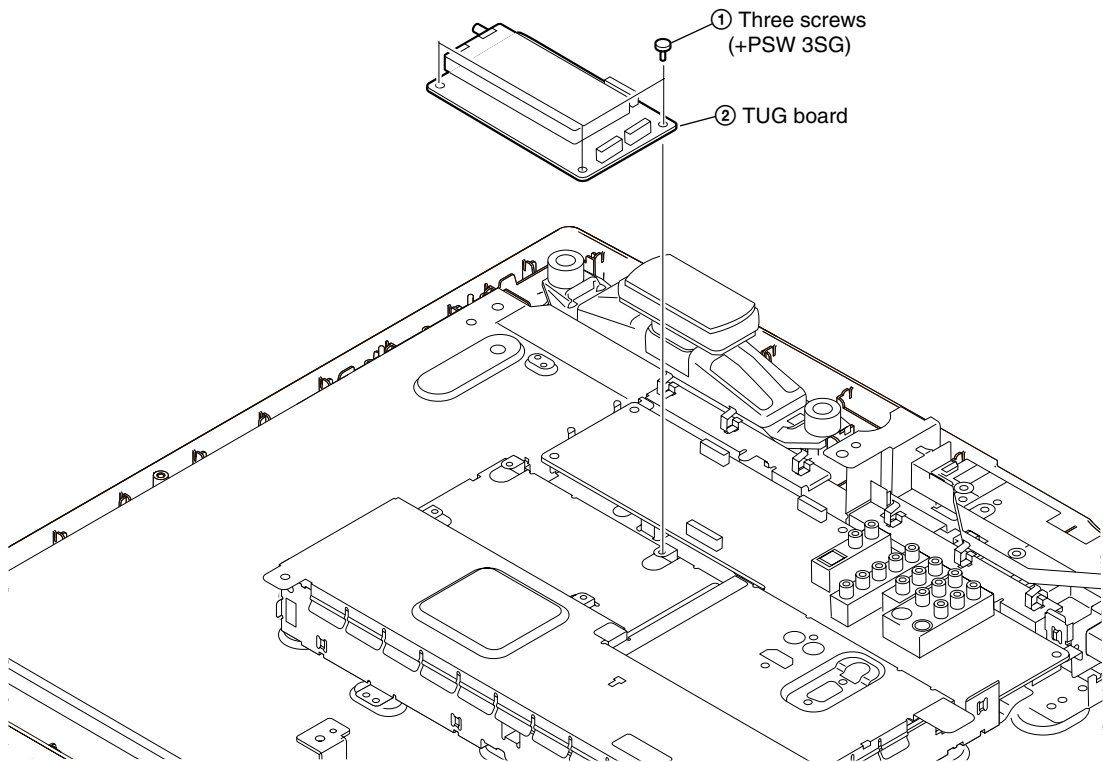


1-1-8. AG BOARD REMOVAL

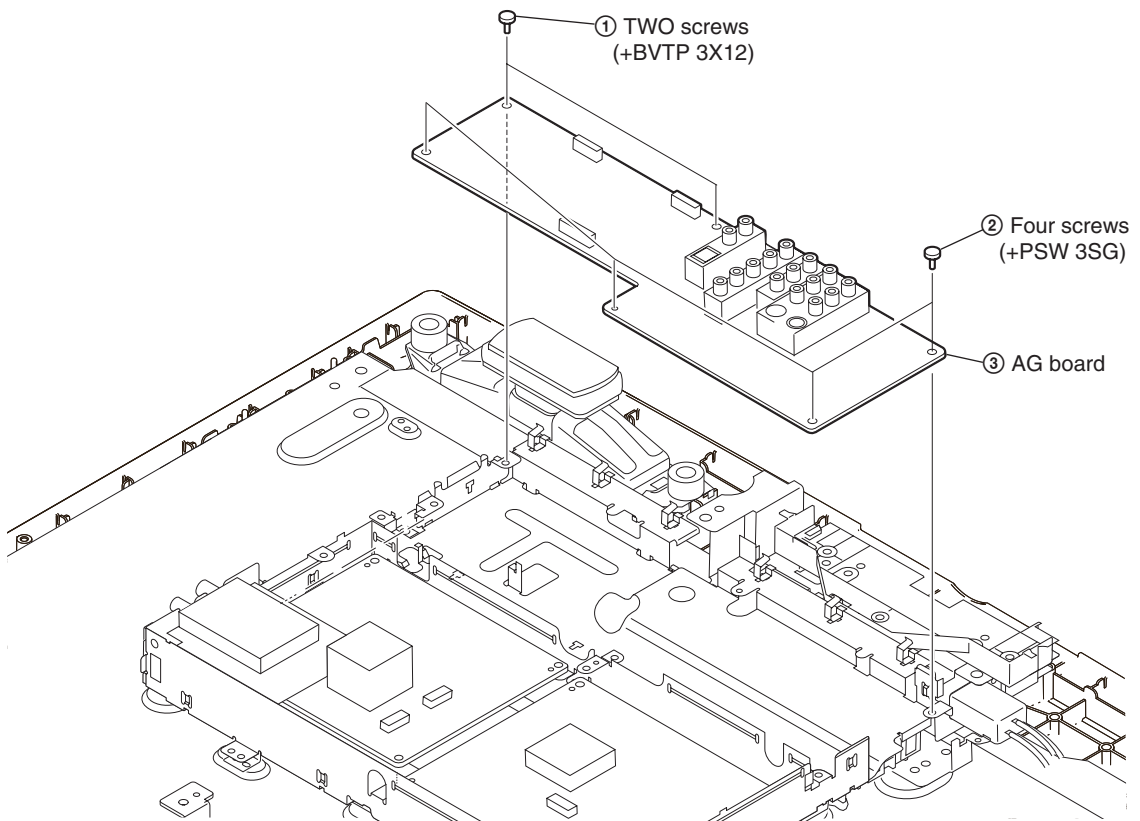


KDL-32V2000

1-1-9. BU BOARD REMOVAL

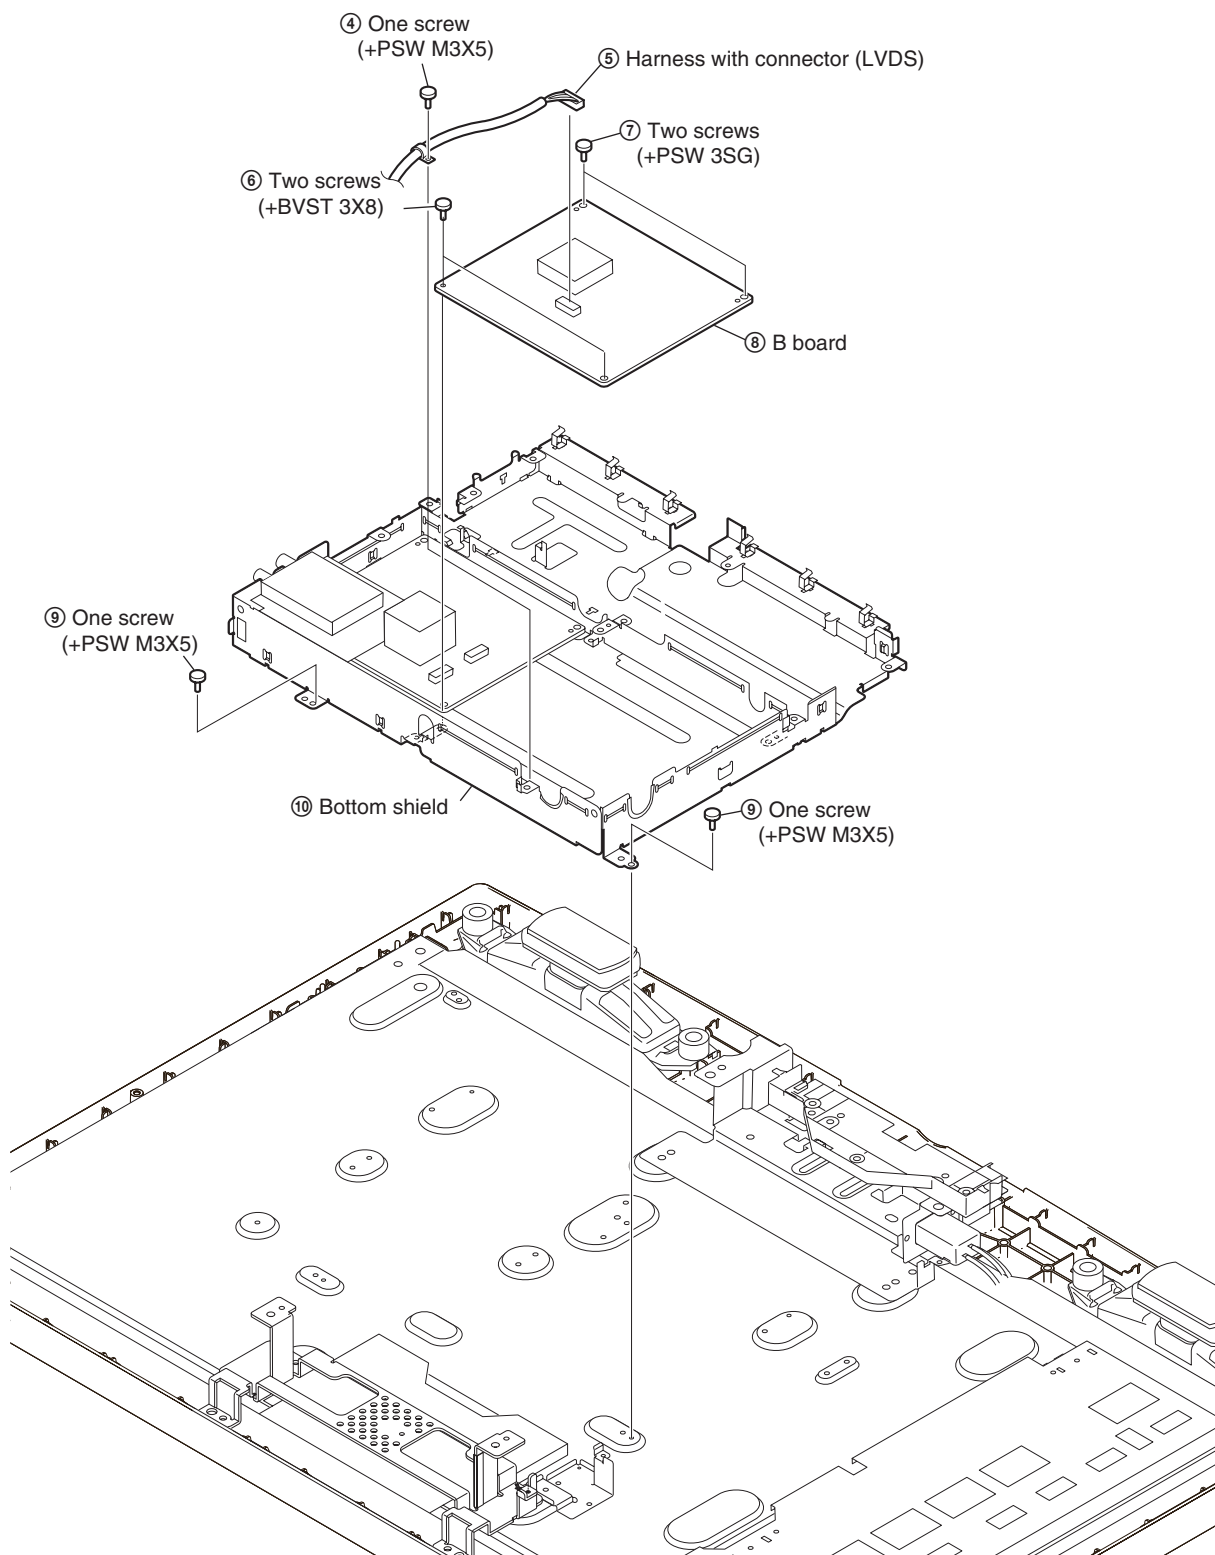


KDL-32V2000

1-1-10. AC INLET REMOVAL

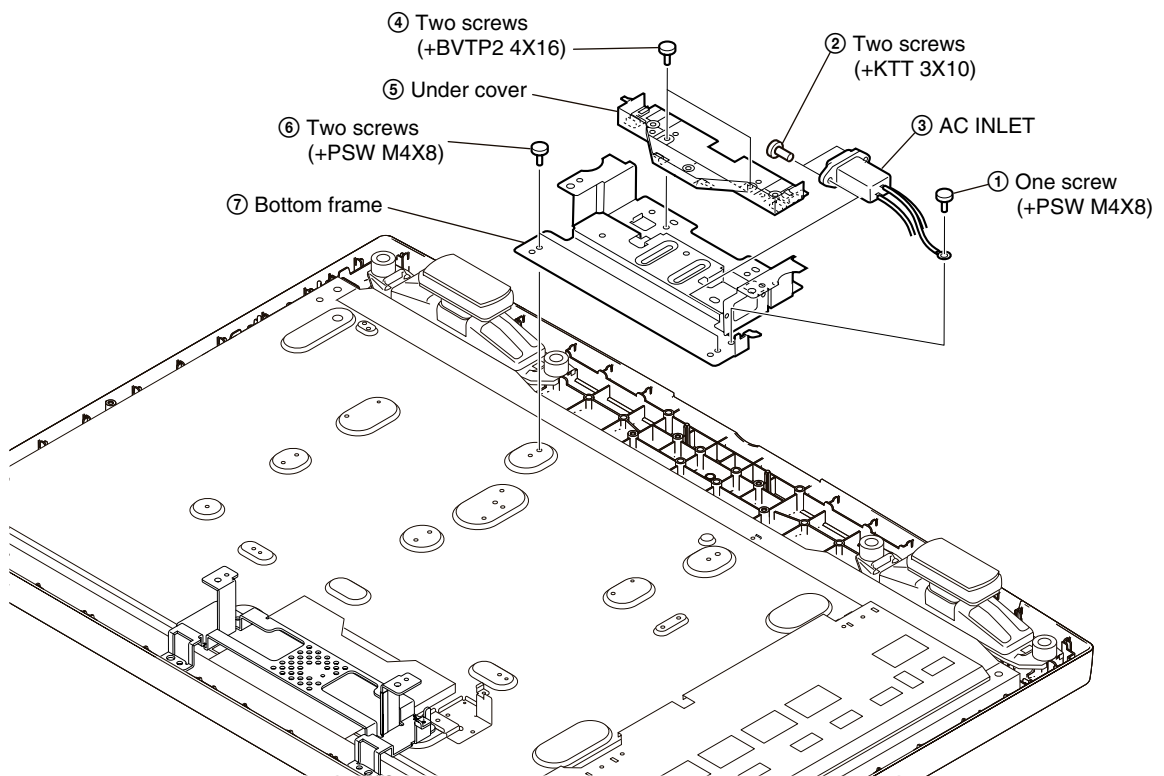


1-1-11. H4 BOARD AND SPEAKER REMOVAL

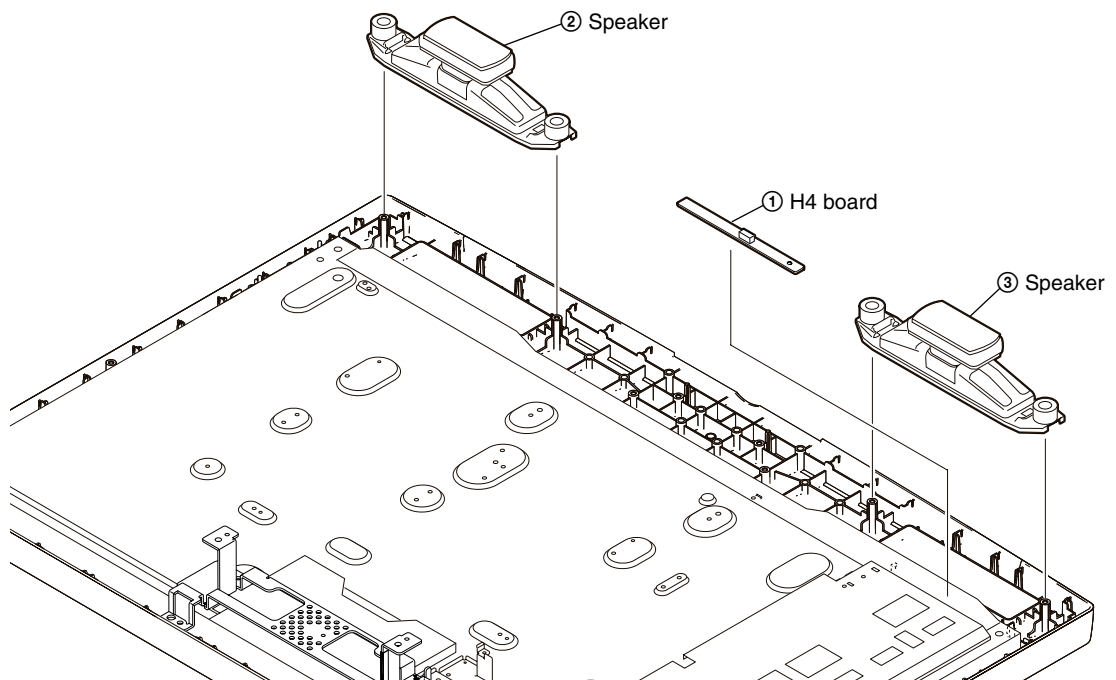


KDL-32V2000

1-1-12. LCD PANEL REMOVAL

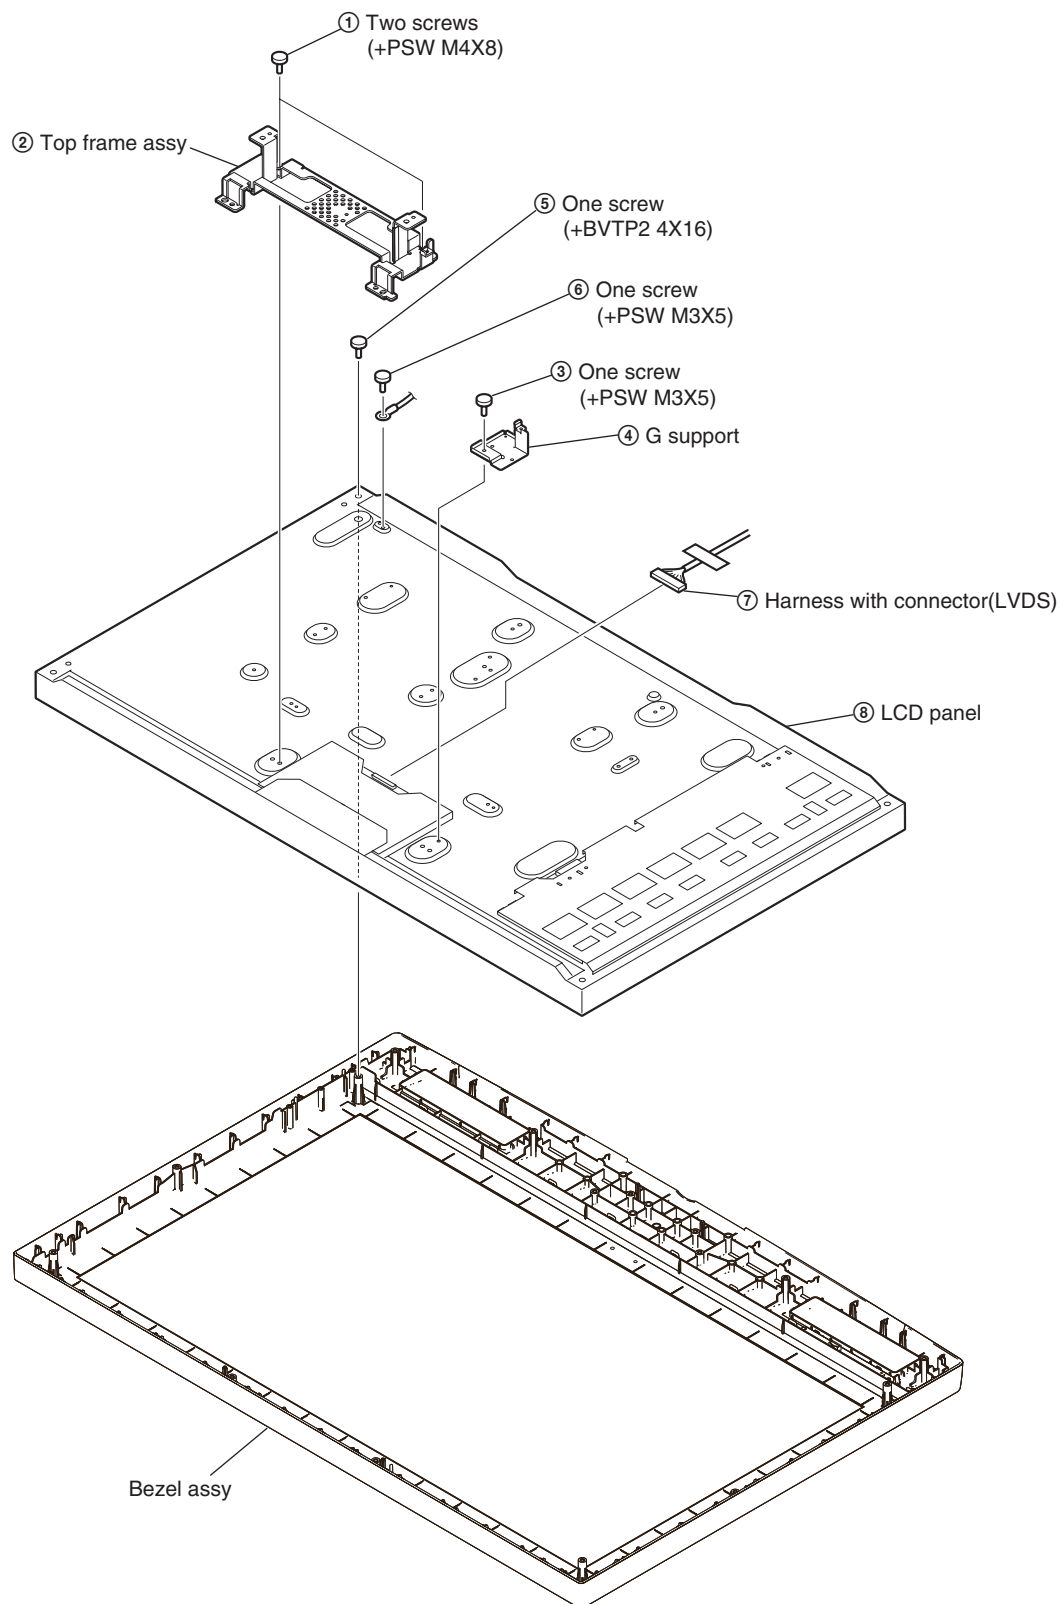


1-2. KDL-40/46V2000

1-2-1. REAR COVER ASSY REMOVAL

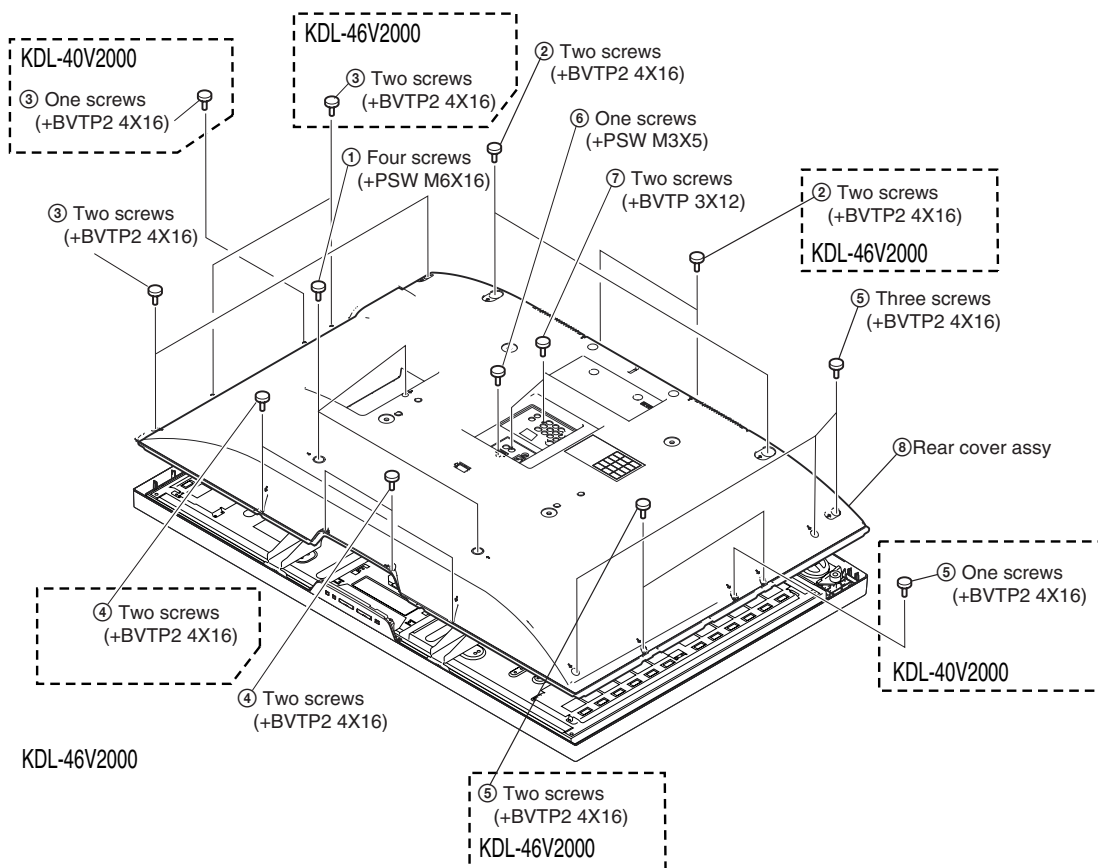


1-2-2. STAND ASSY AND VESA BRACKET REMOVAL

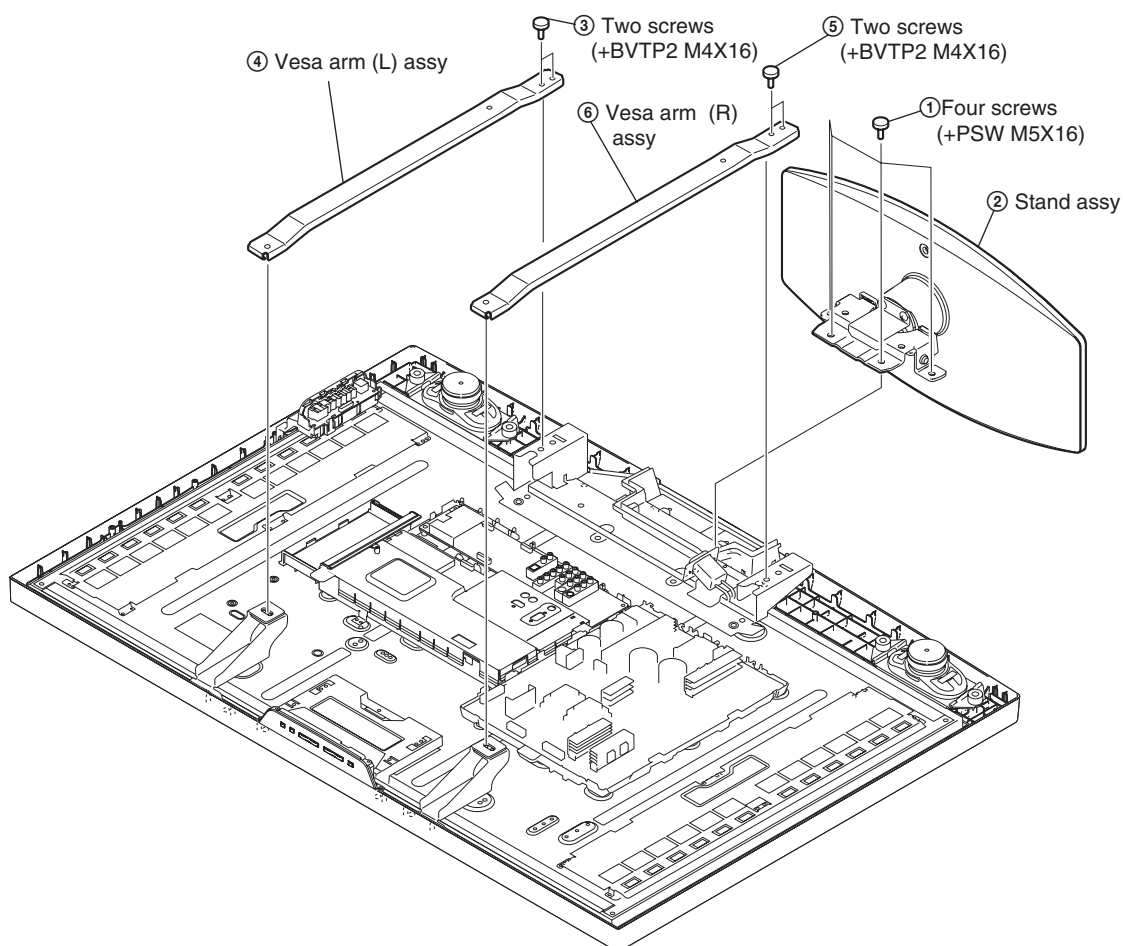


KDL-40/46V2000

1-2-3. H1 BOARD REMOVAL

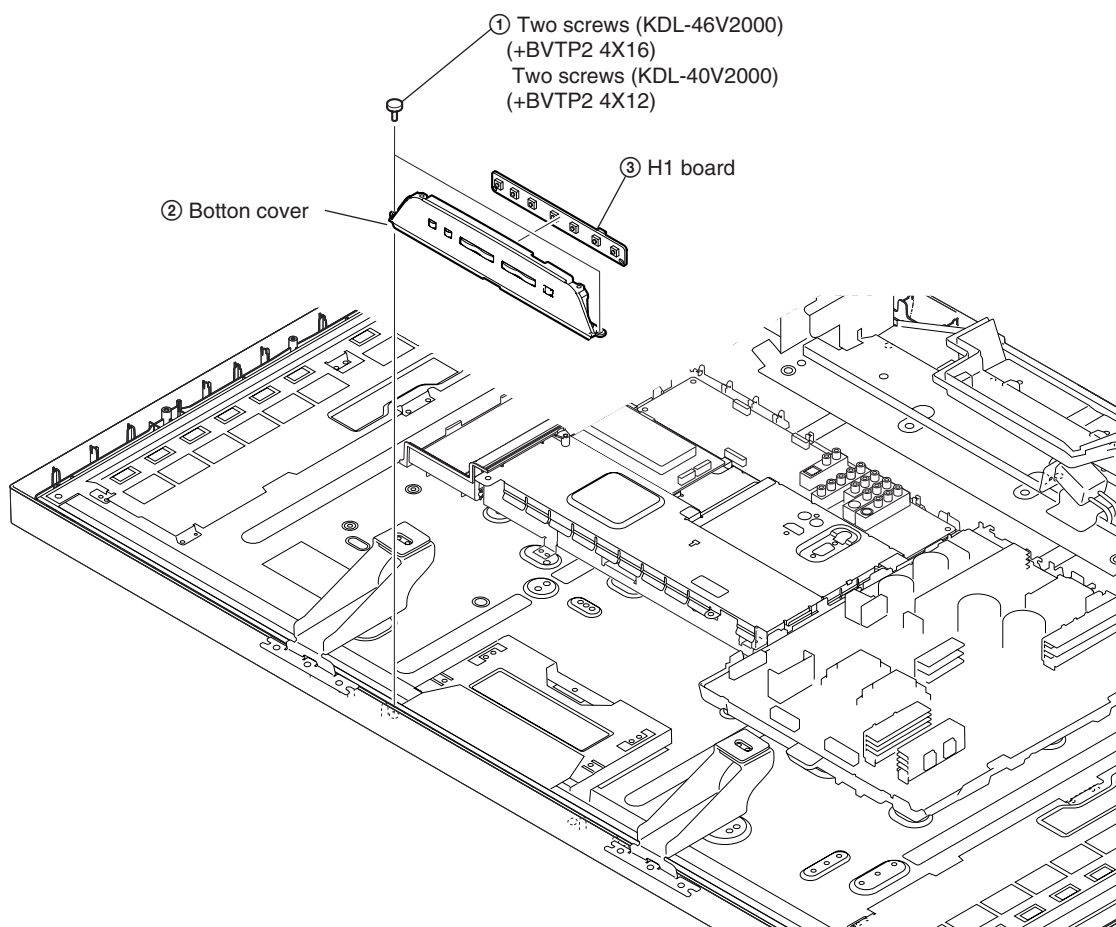


1-2-4. H2 BOARD REMOVAL

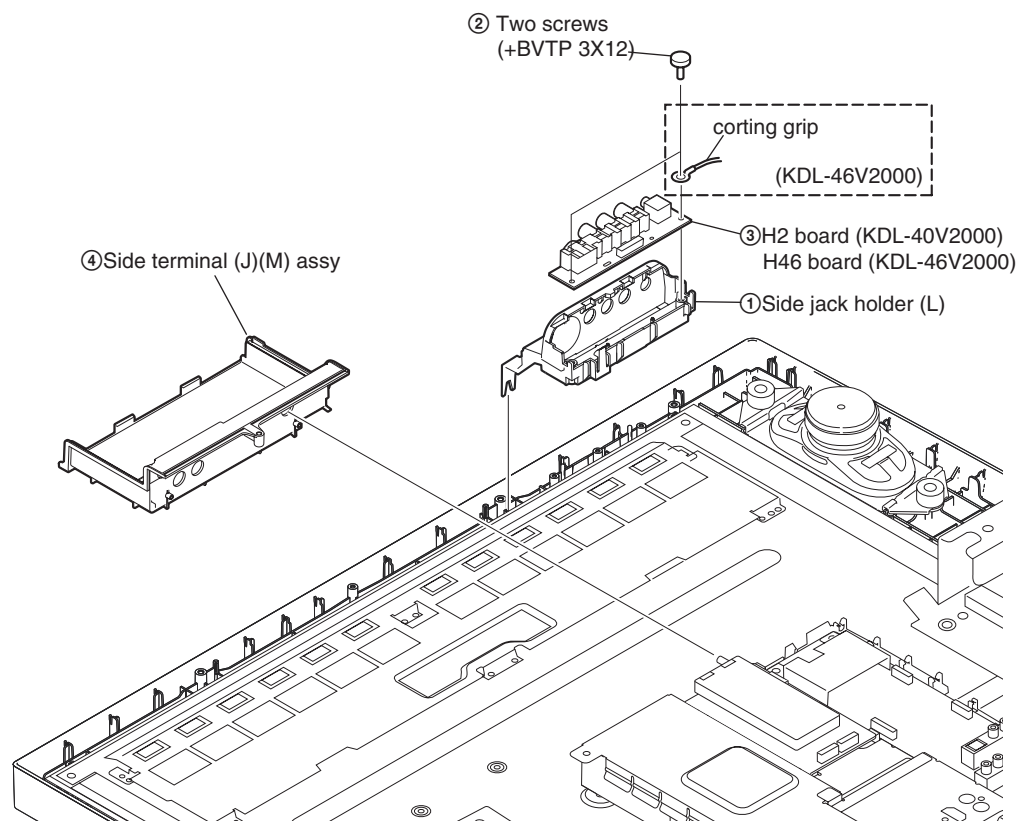


KDL-40/46V2000


1-2-5. G2 BOARD REMOVAL

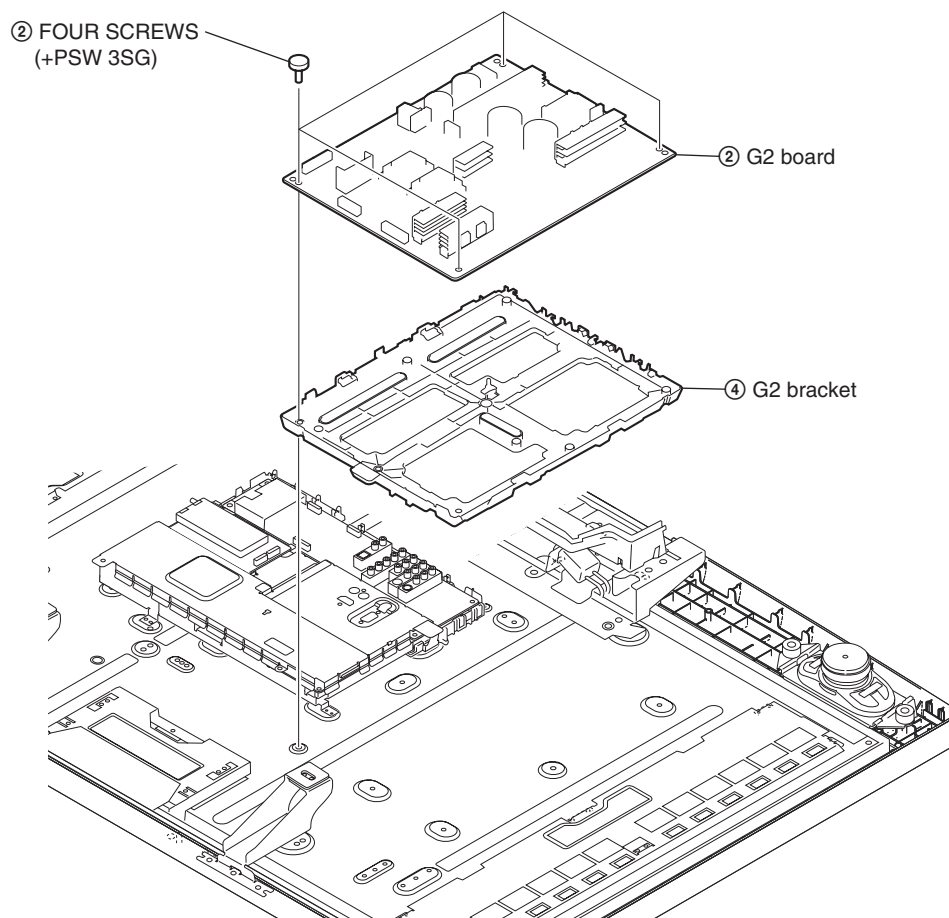


1-2-6. DTT SHIELD REMOVAL

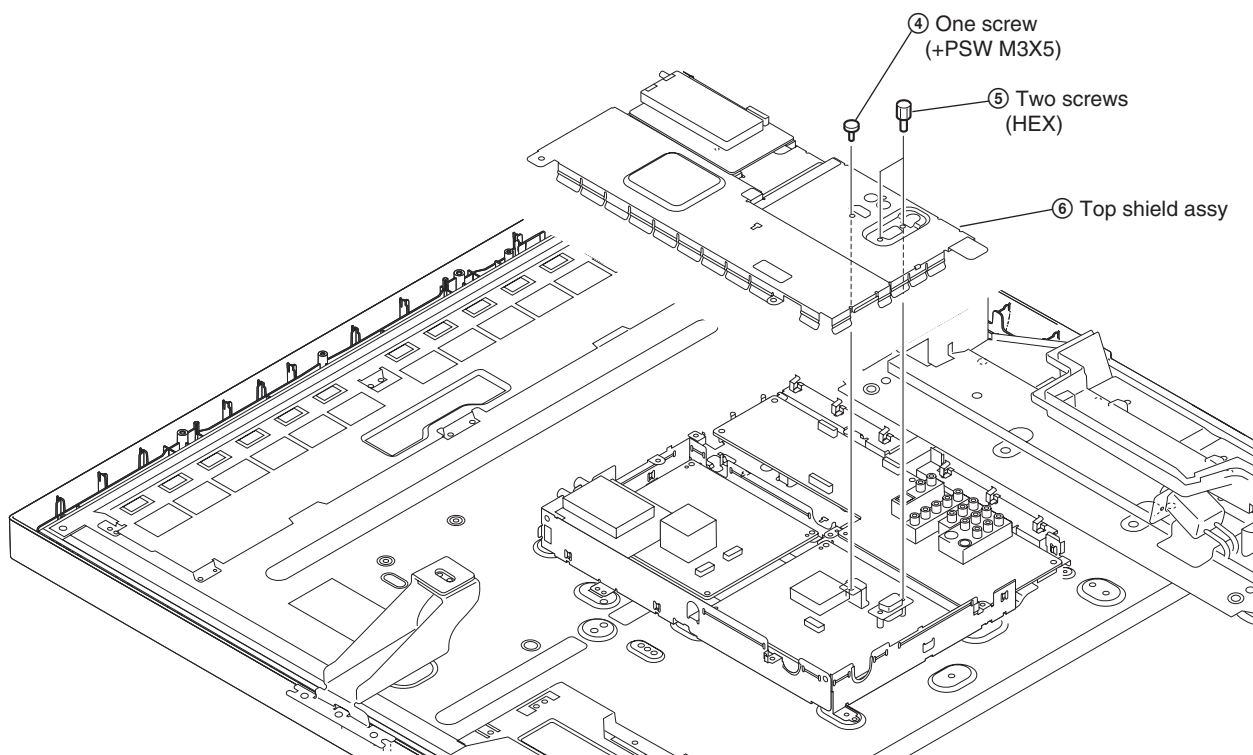


KDL-40/46V2000
1-2-7. TUG BOARD REMOVAL

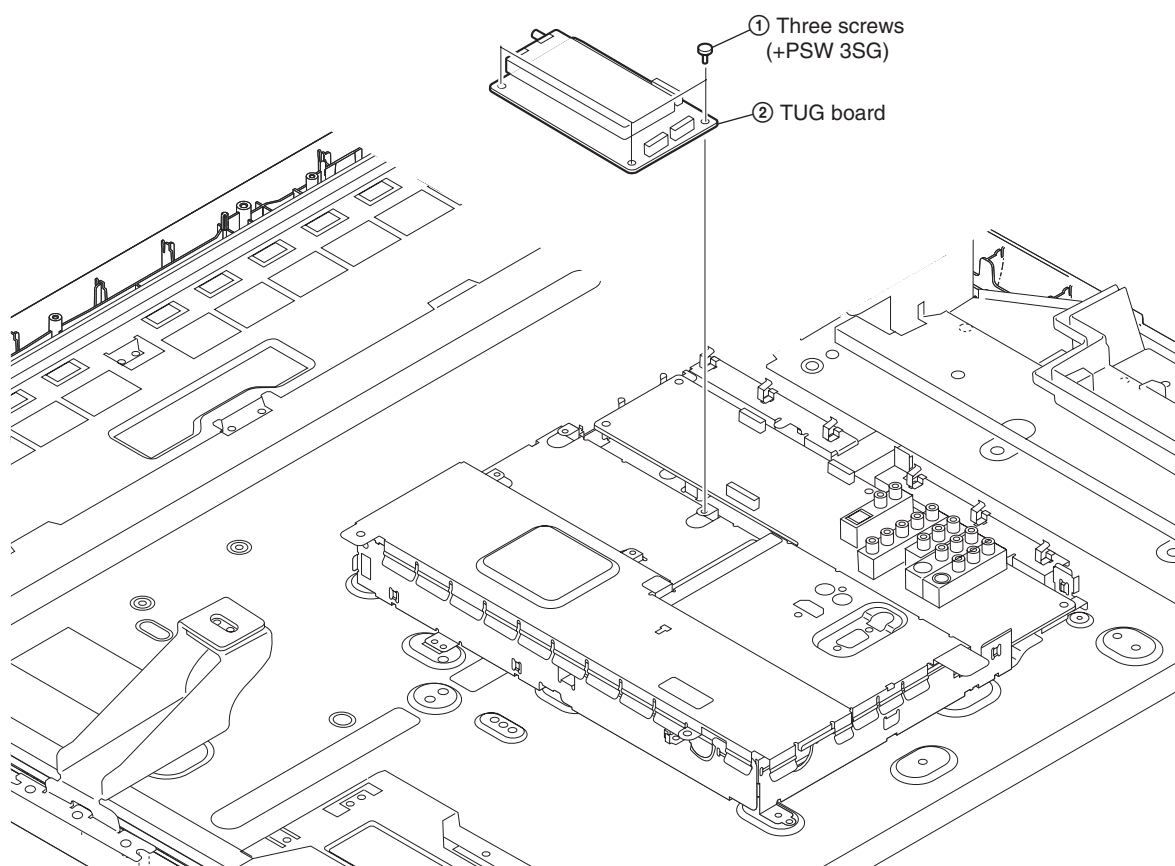


1-2-8. AU BOARD REMOVAL

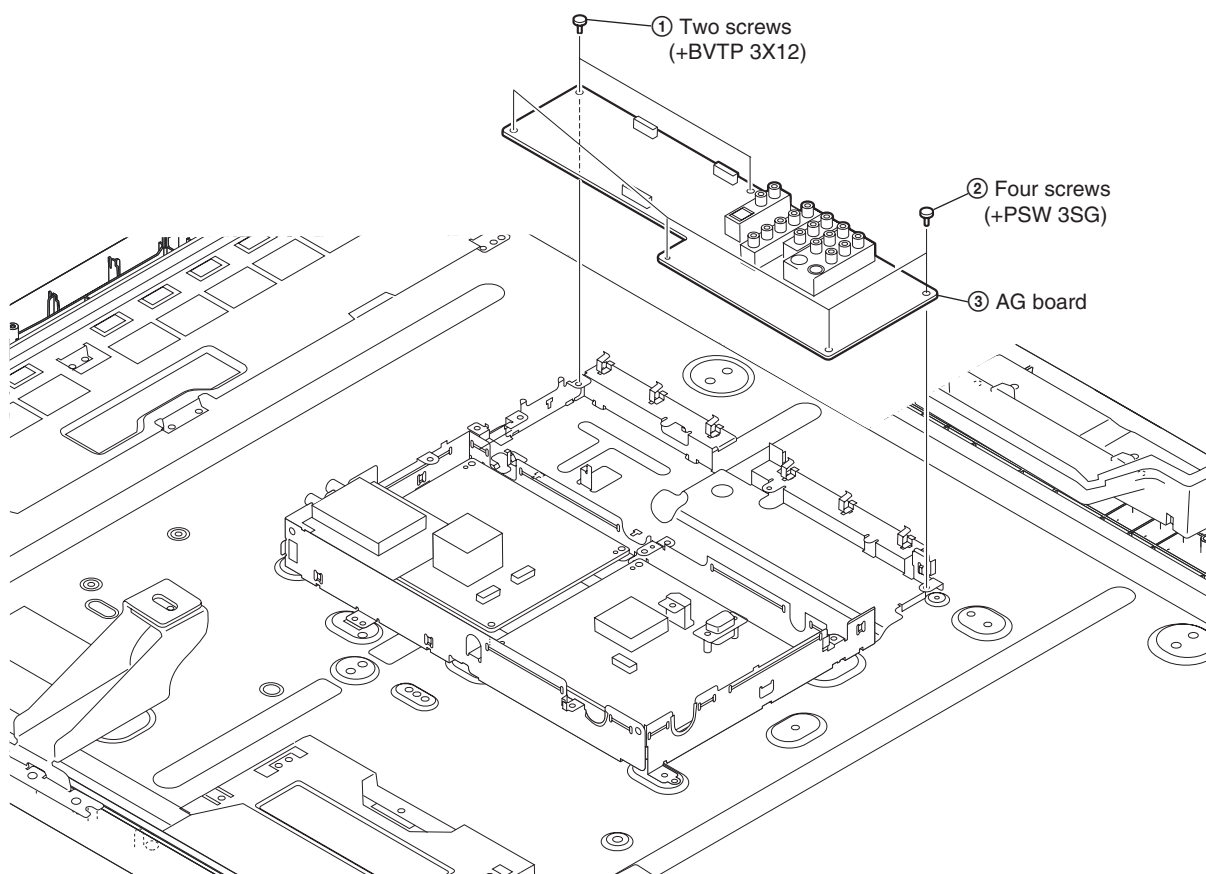

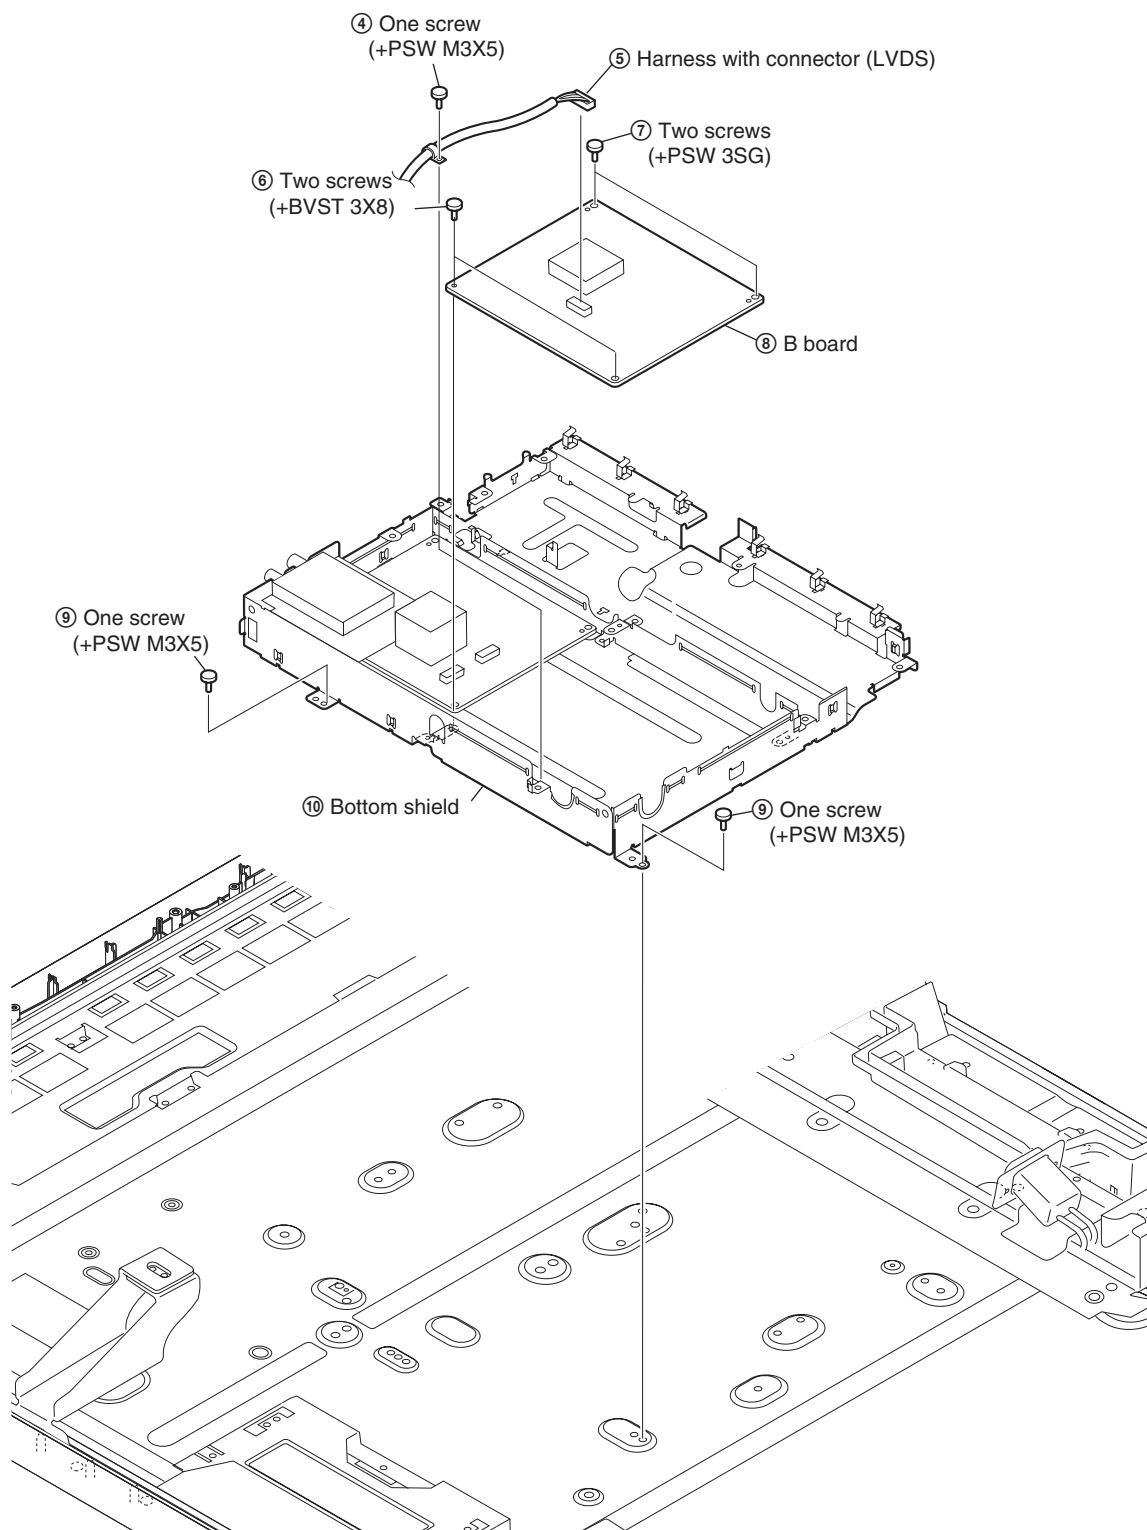


KDL-40/46V2000

1-2-10. AC INLET REMOVAL


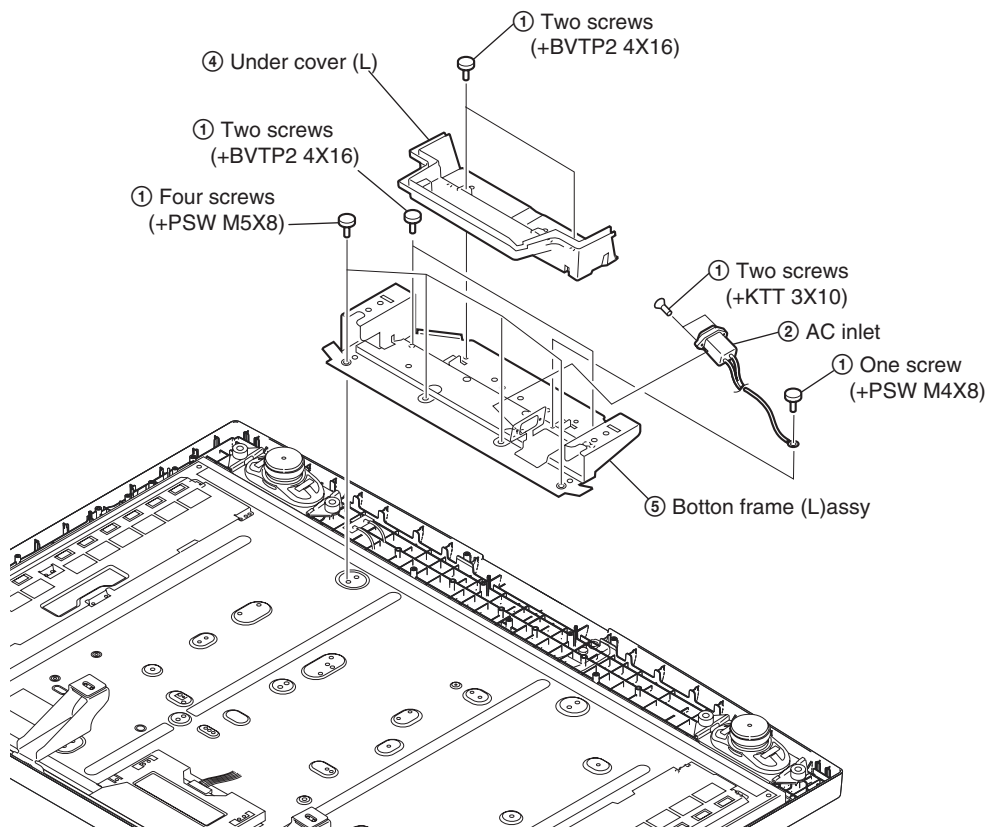


1-2-11. H4 BOARD AND SPEAKER REMOVAL

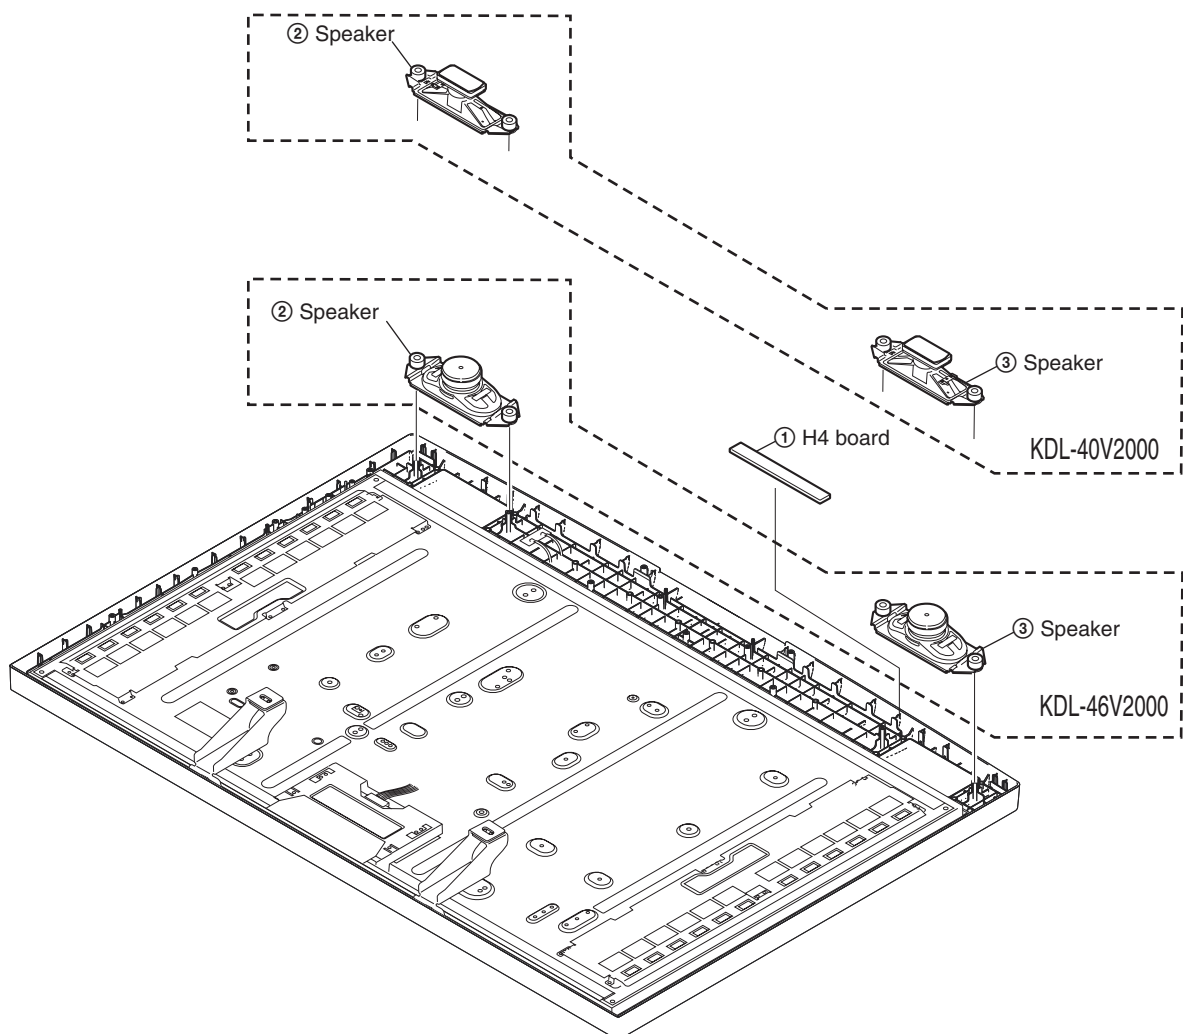


KDL-40/46V2000

1-2-12. TOP FRAME REMOVAL

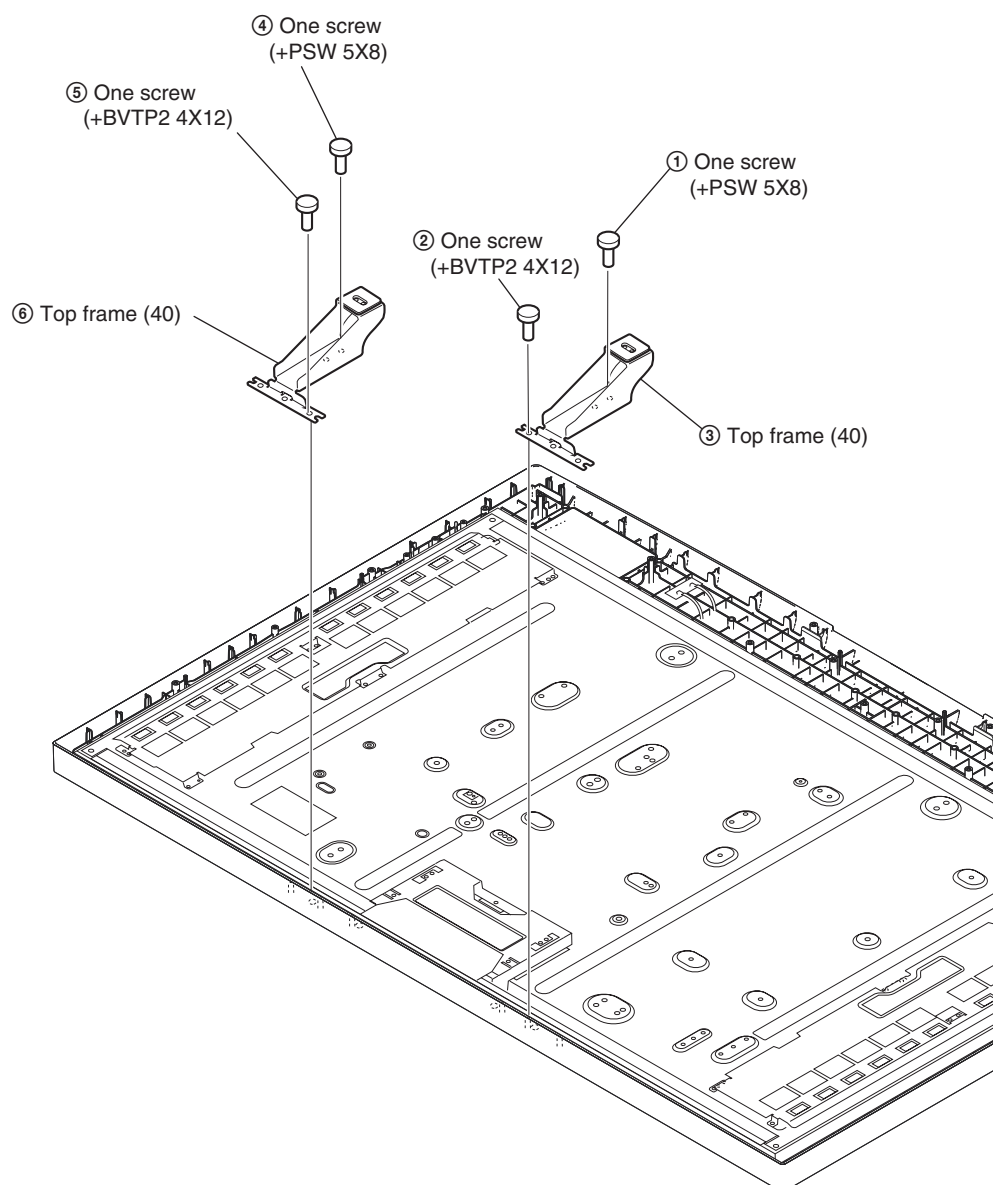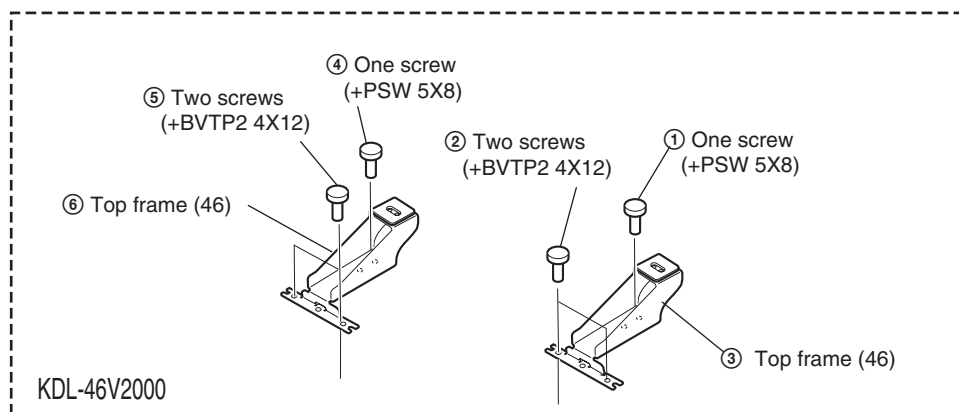


KDL-40/46V2000

1-2-13. LCD PANEL REMOVAL

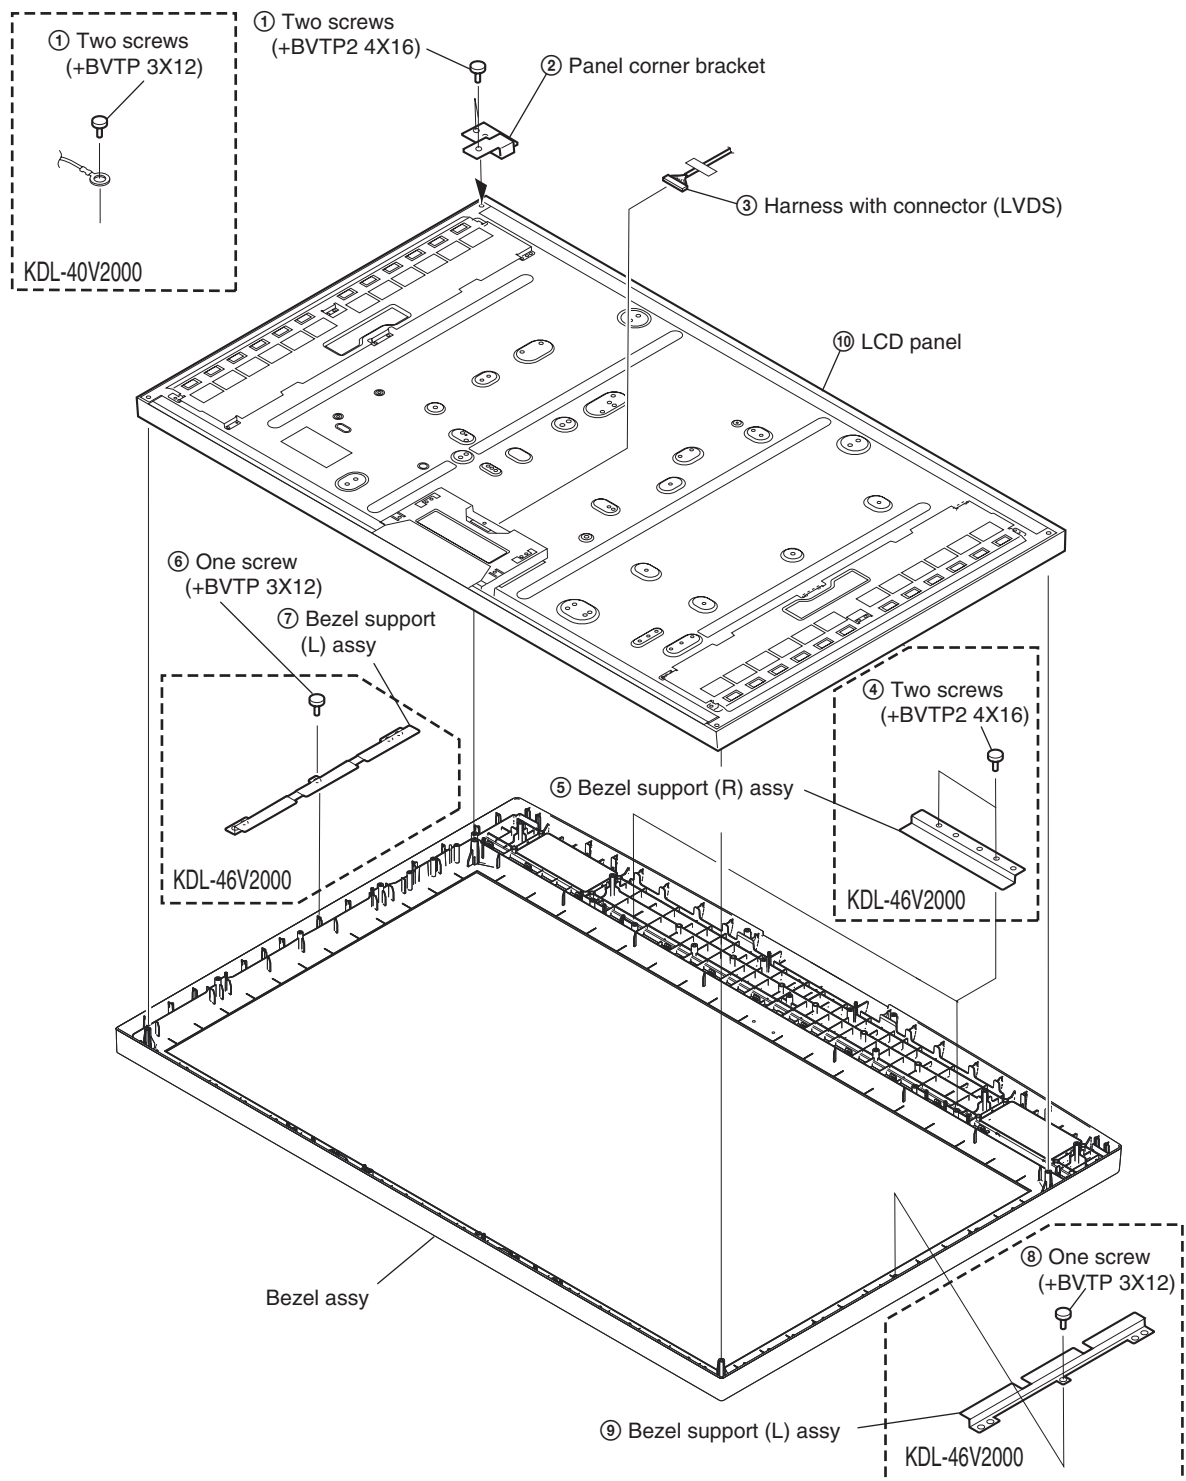


SECTION 2
DIAGRAMS


2-1. BLOCK DIAGRAMS
(1) AG, H2 and H46 Boards

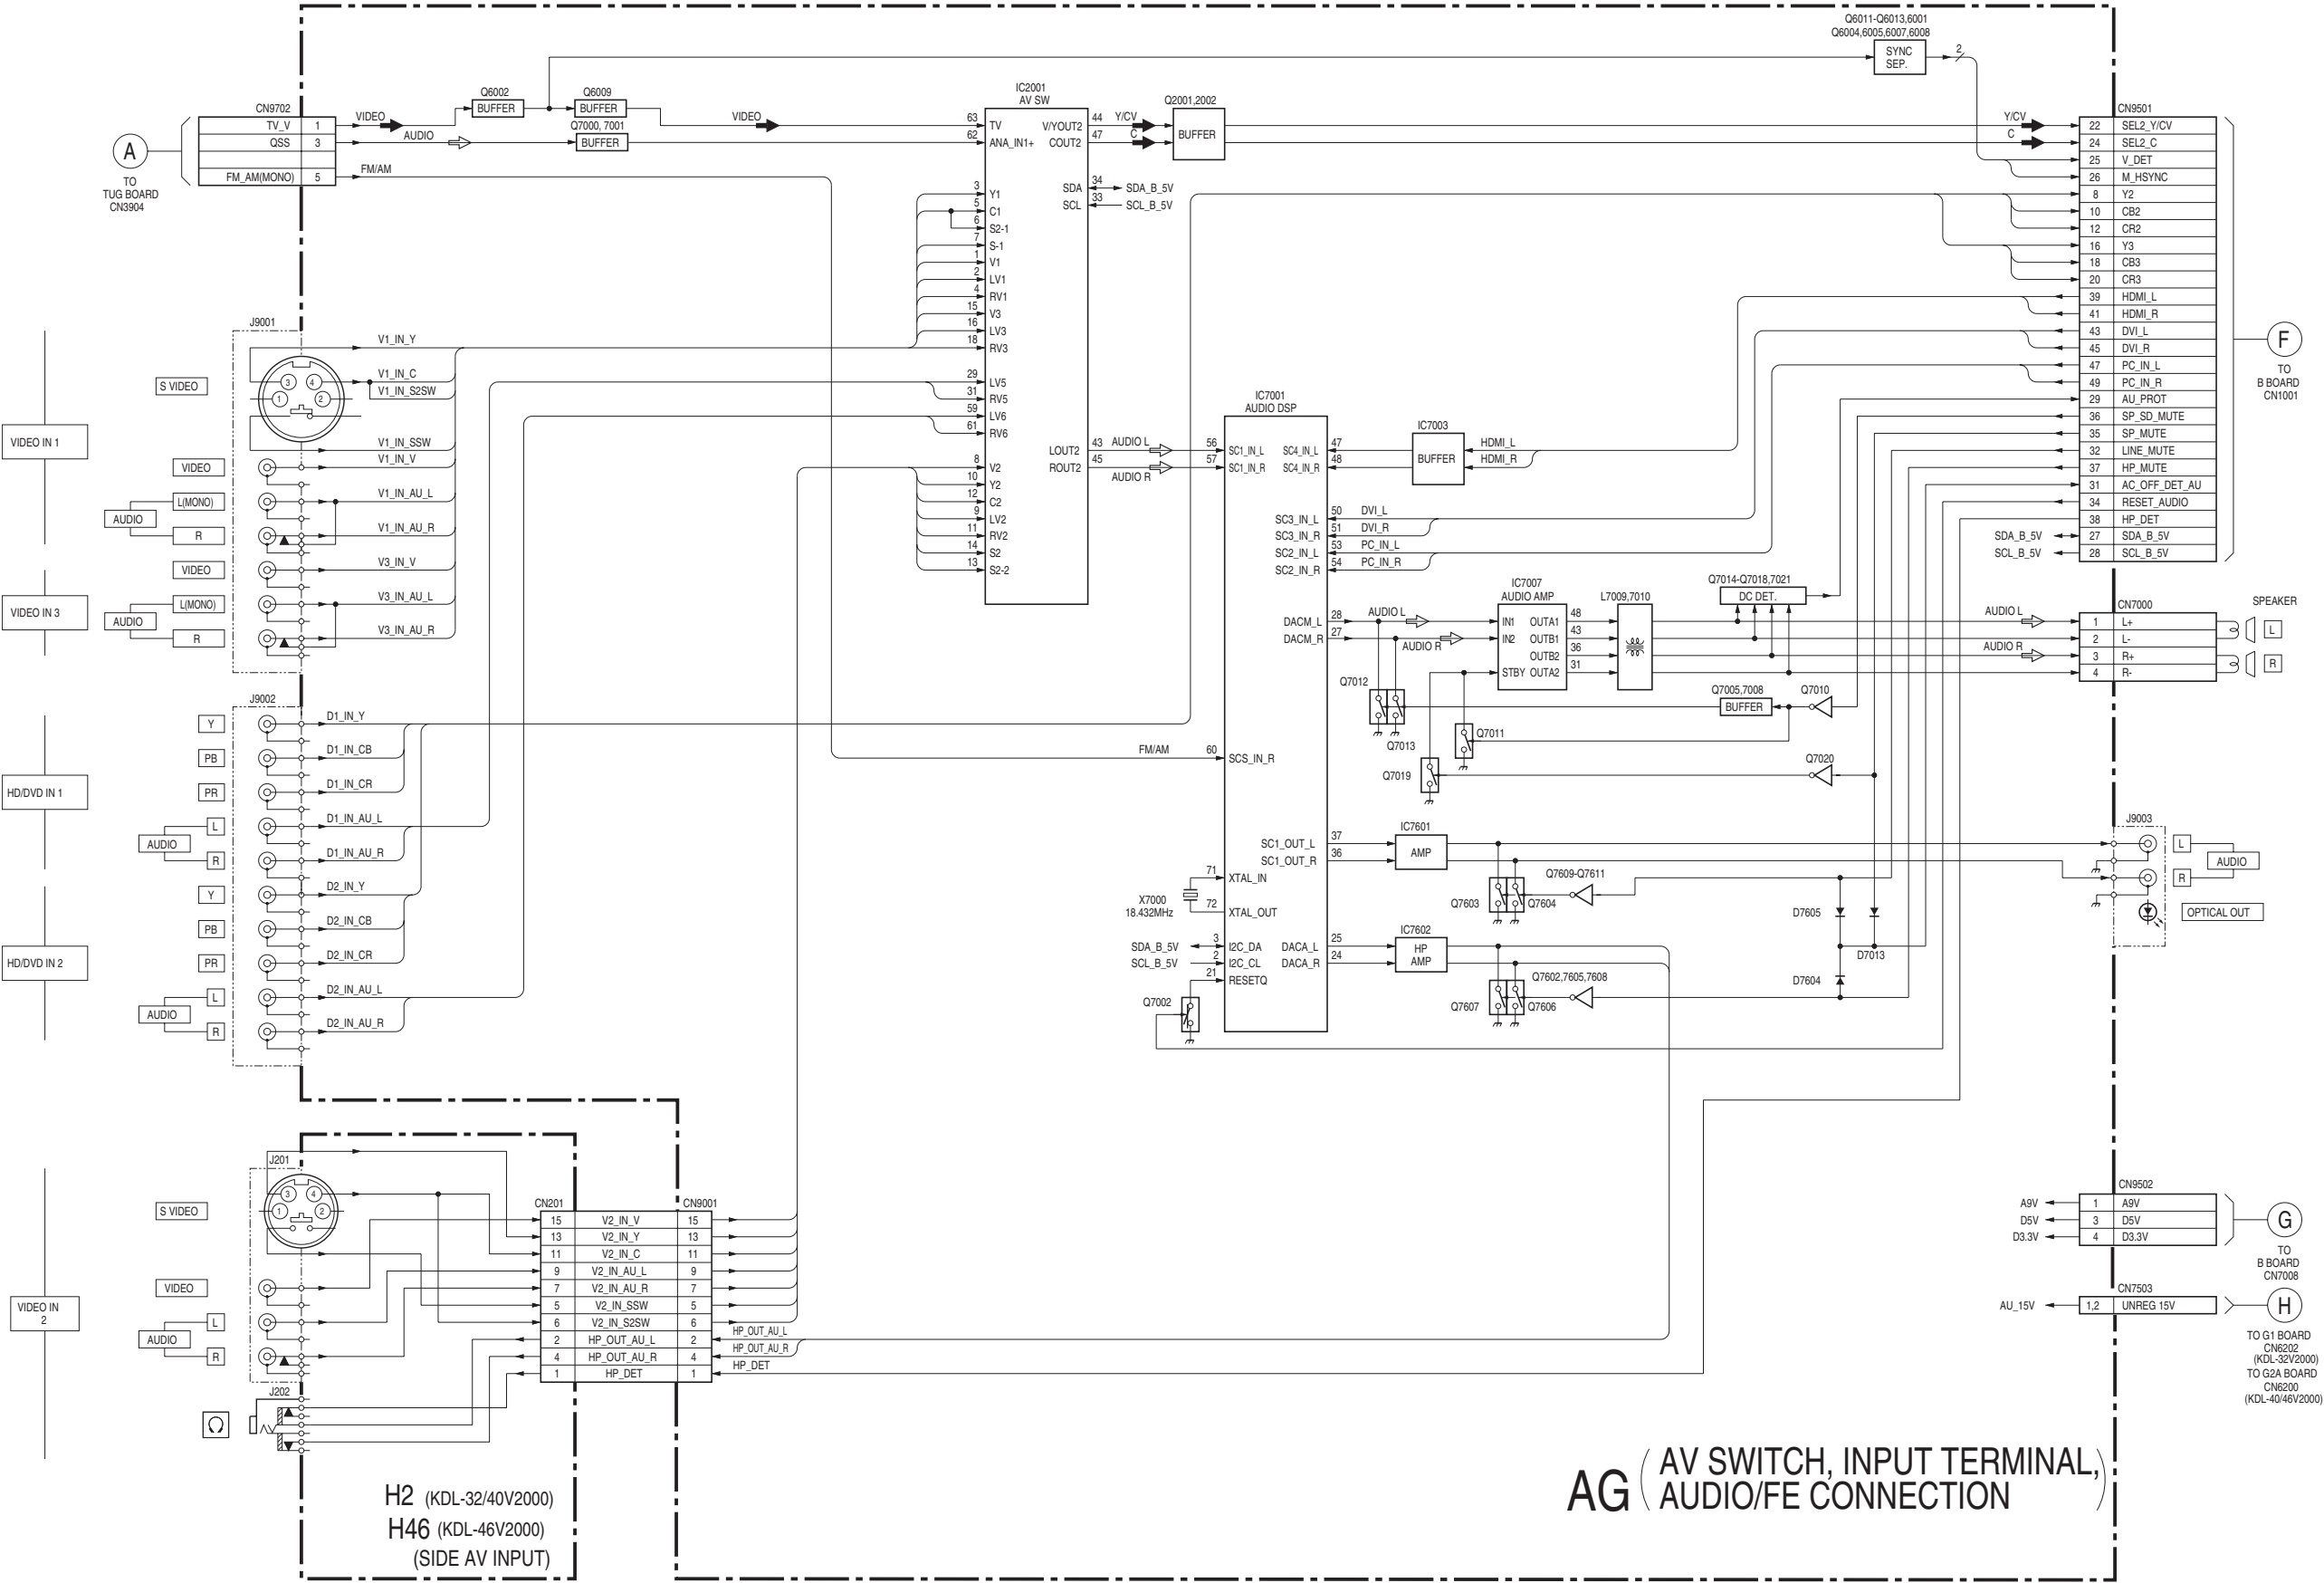


(2) B, H1, H4 and J Boards

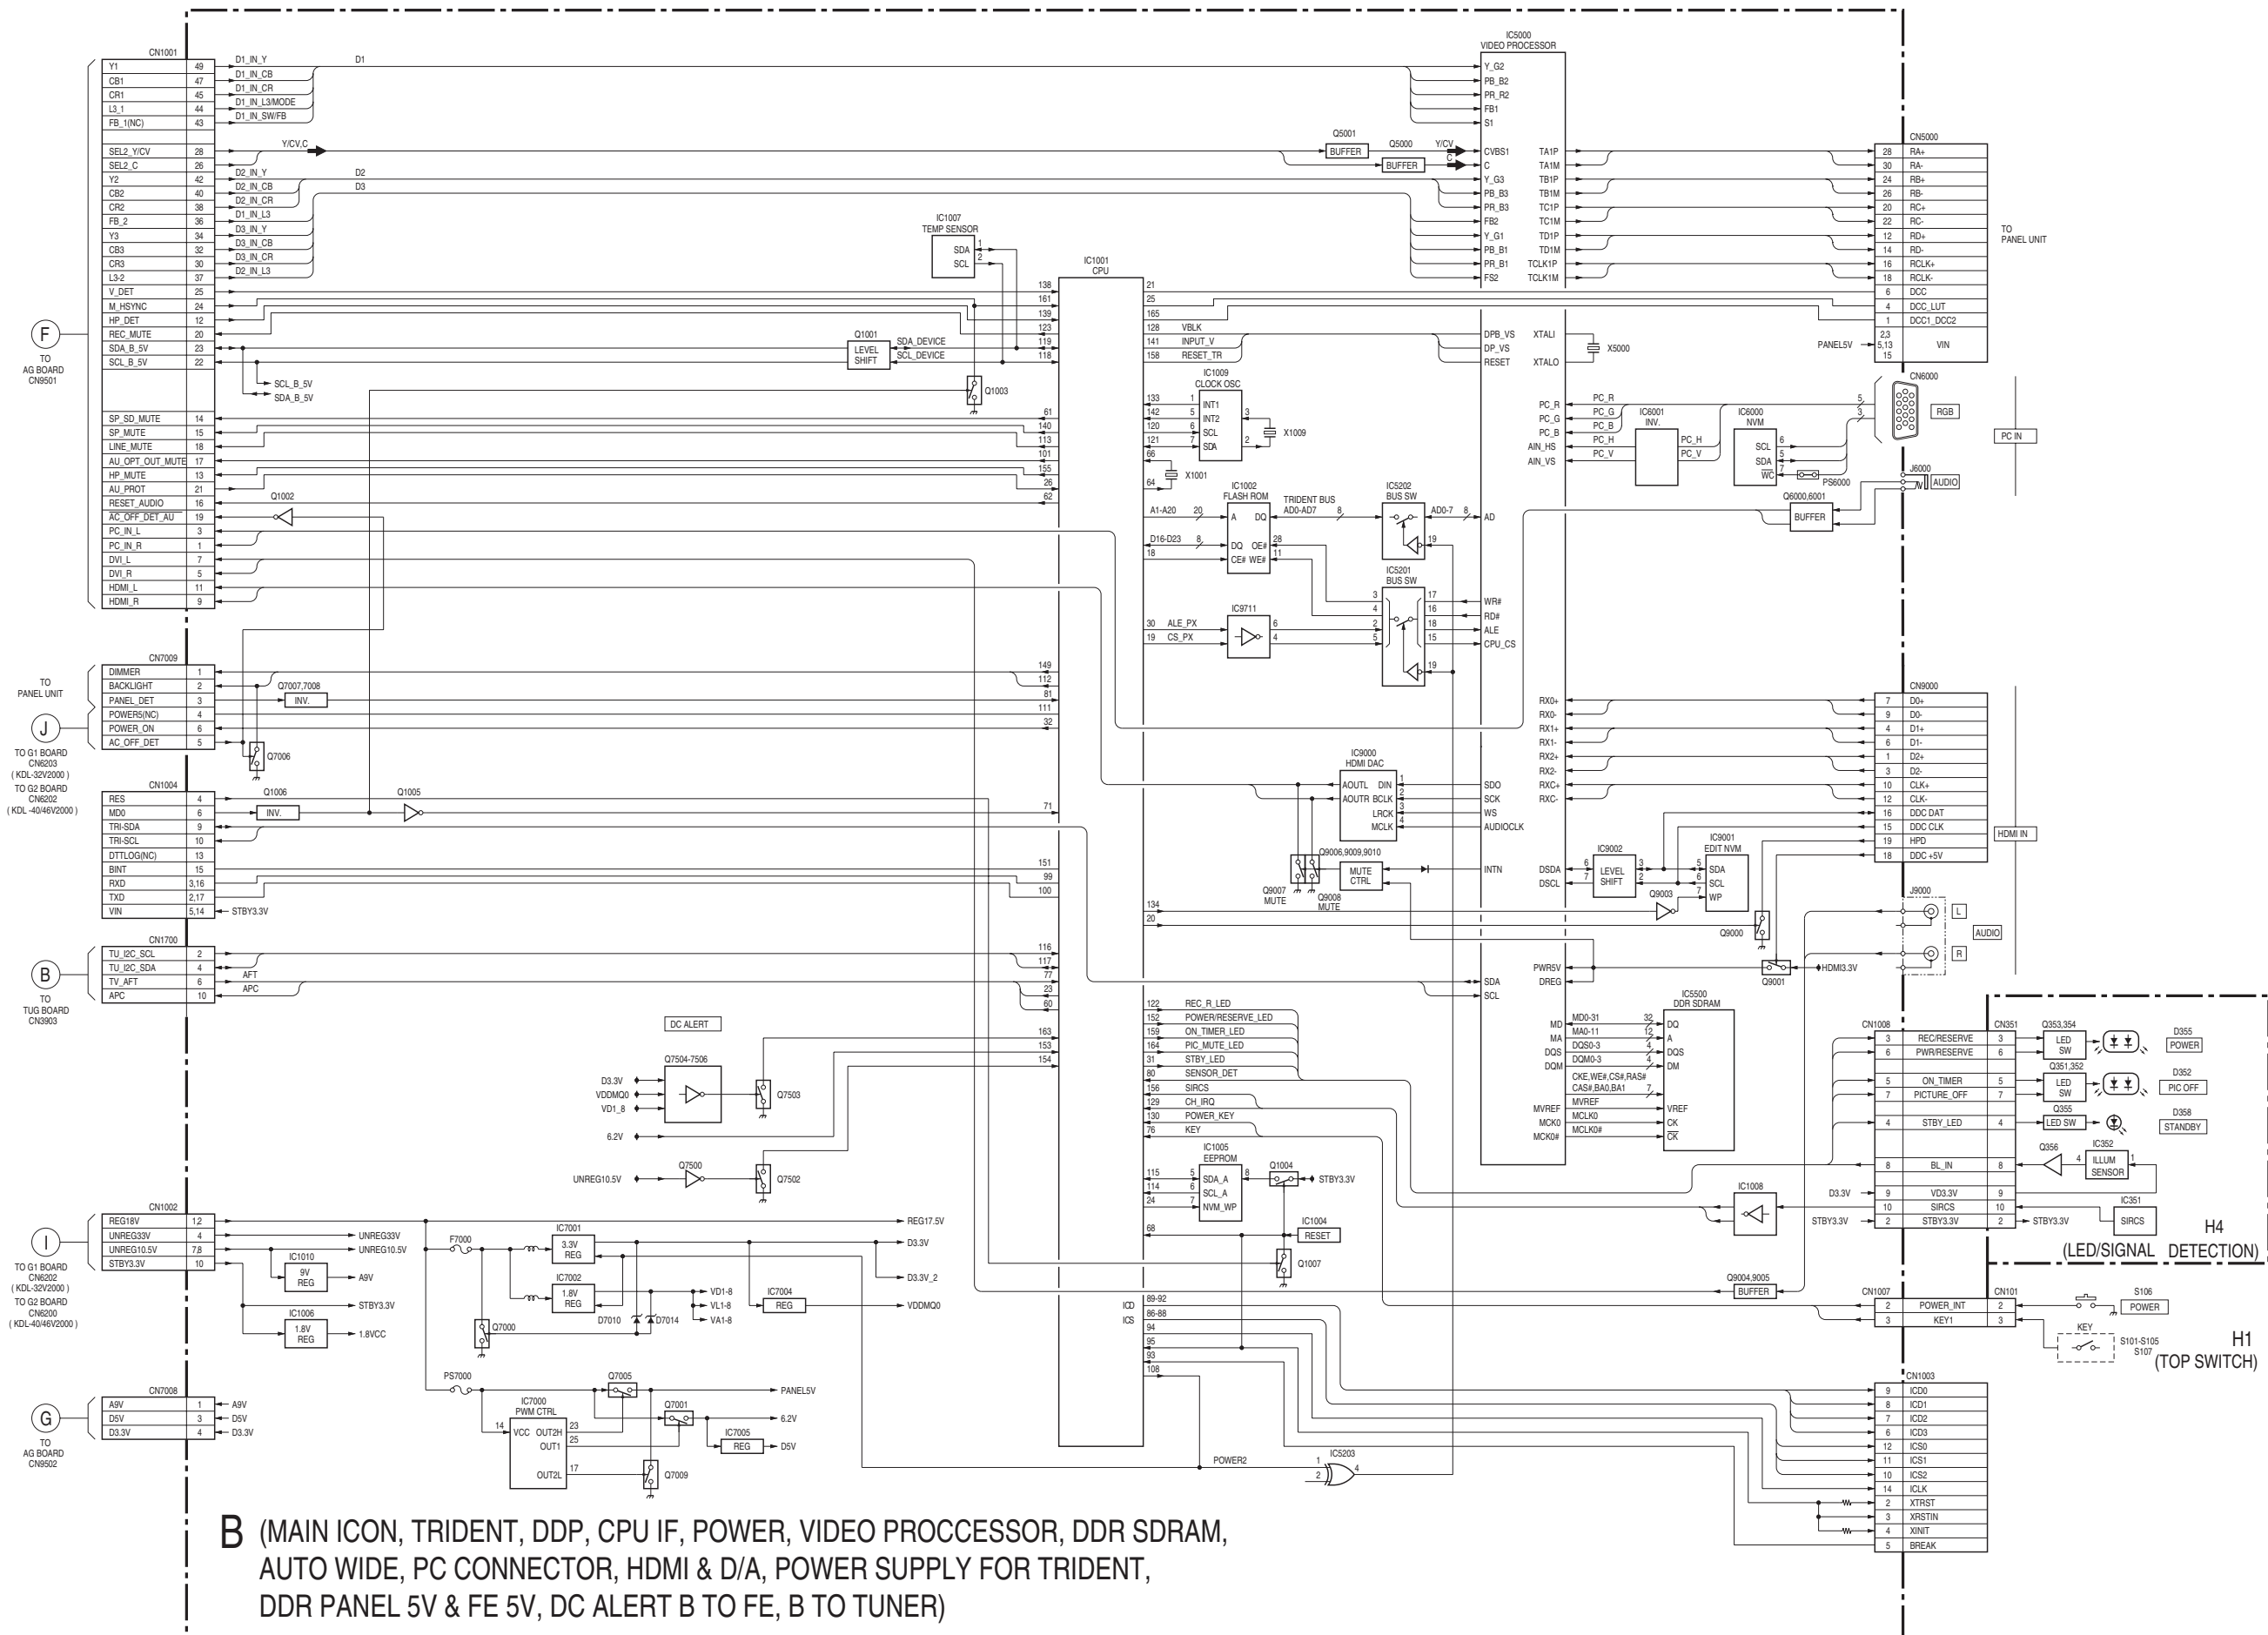


(3) TUG Board

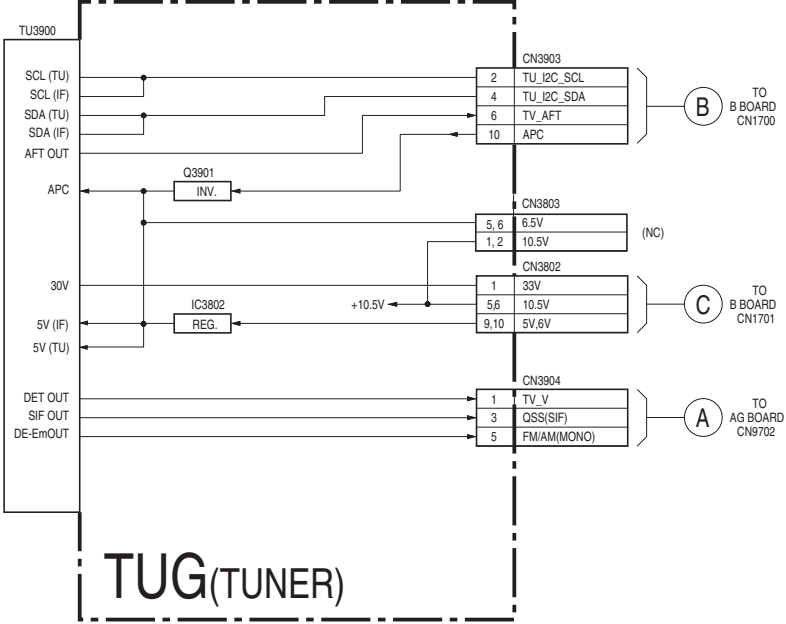


(4) G1 Board

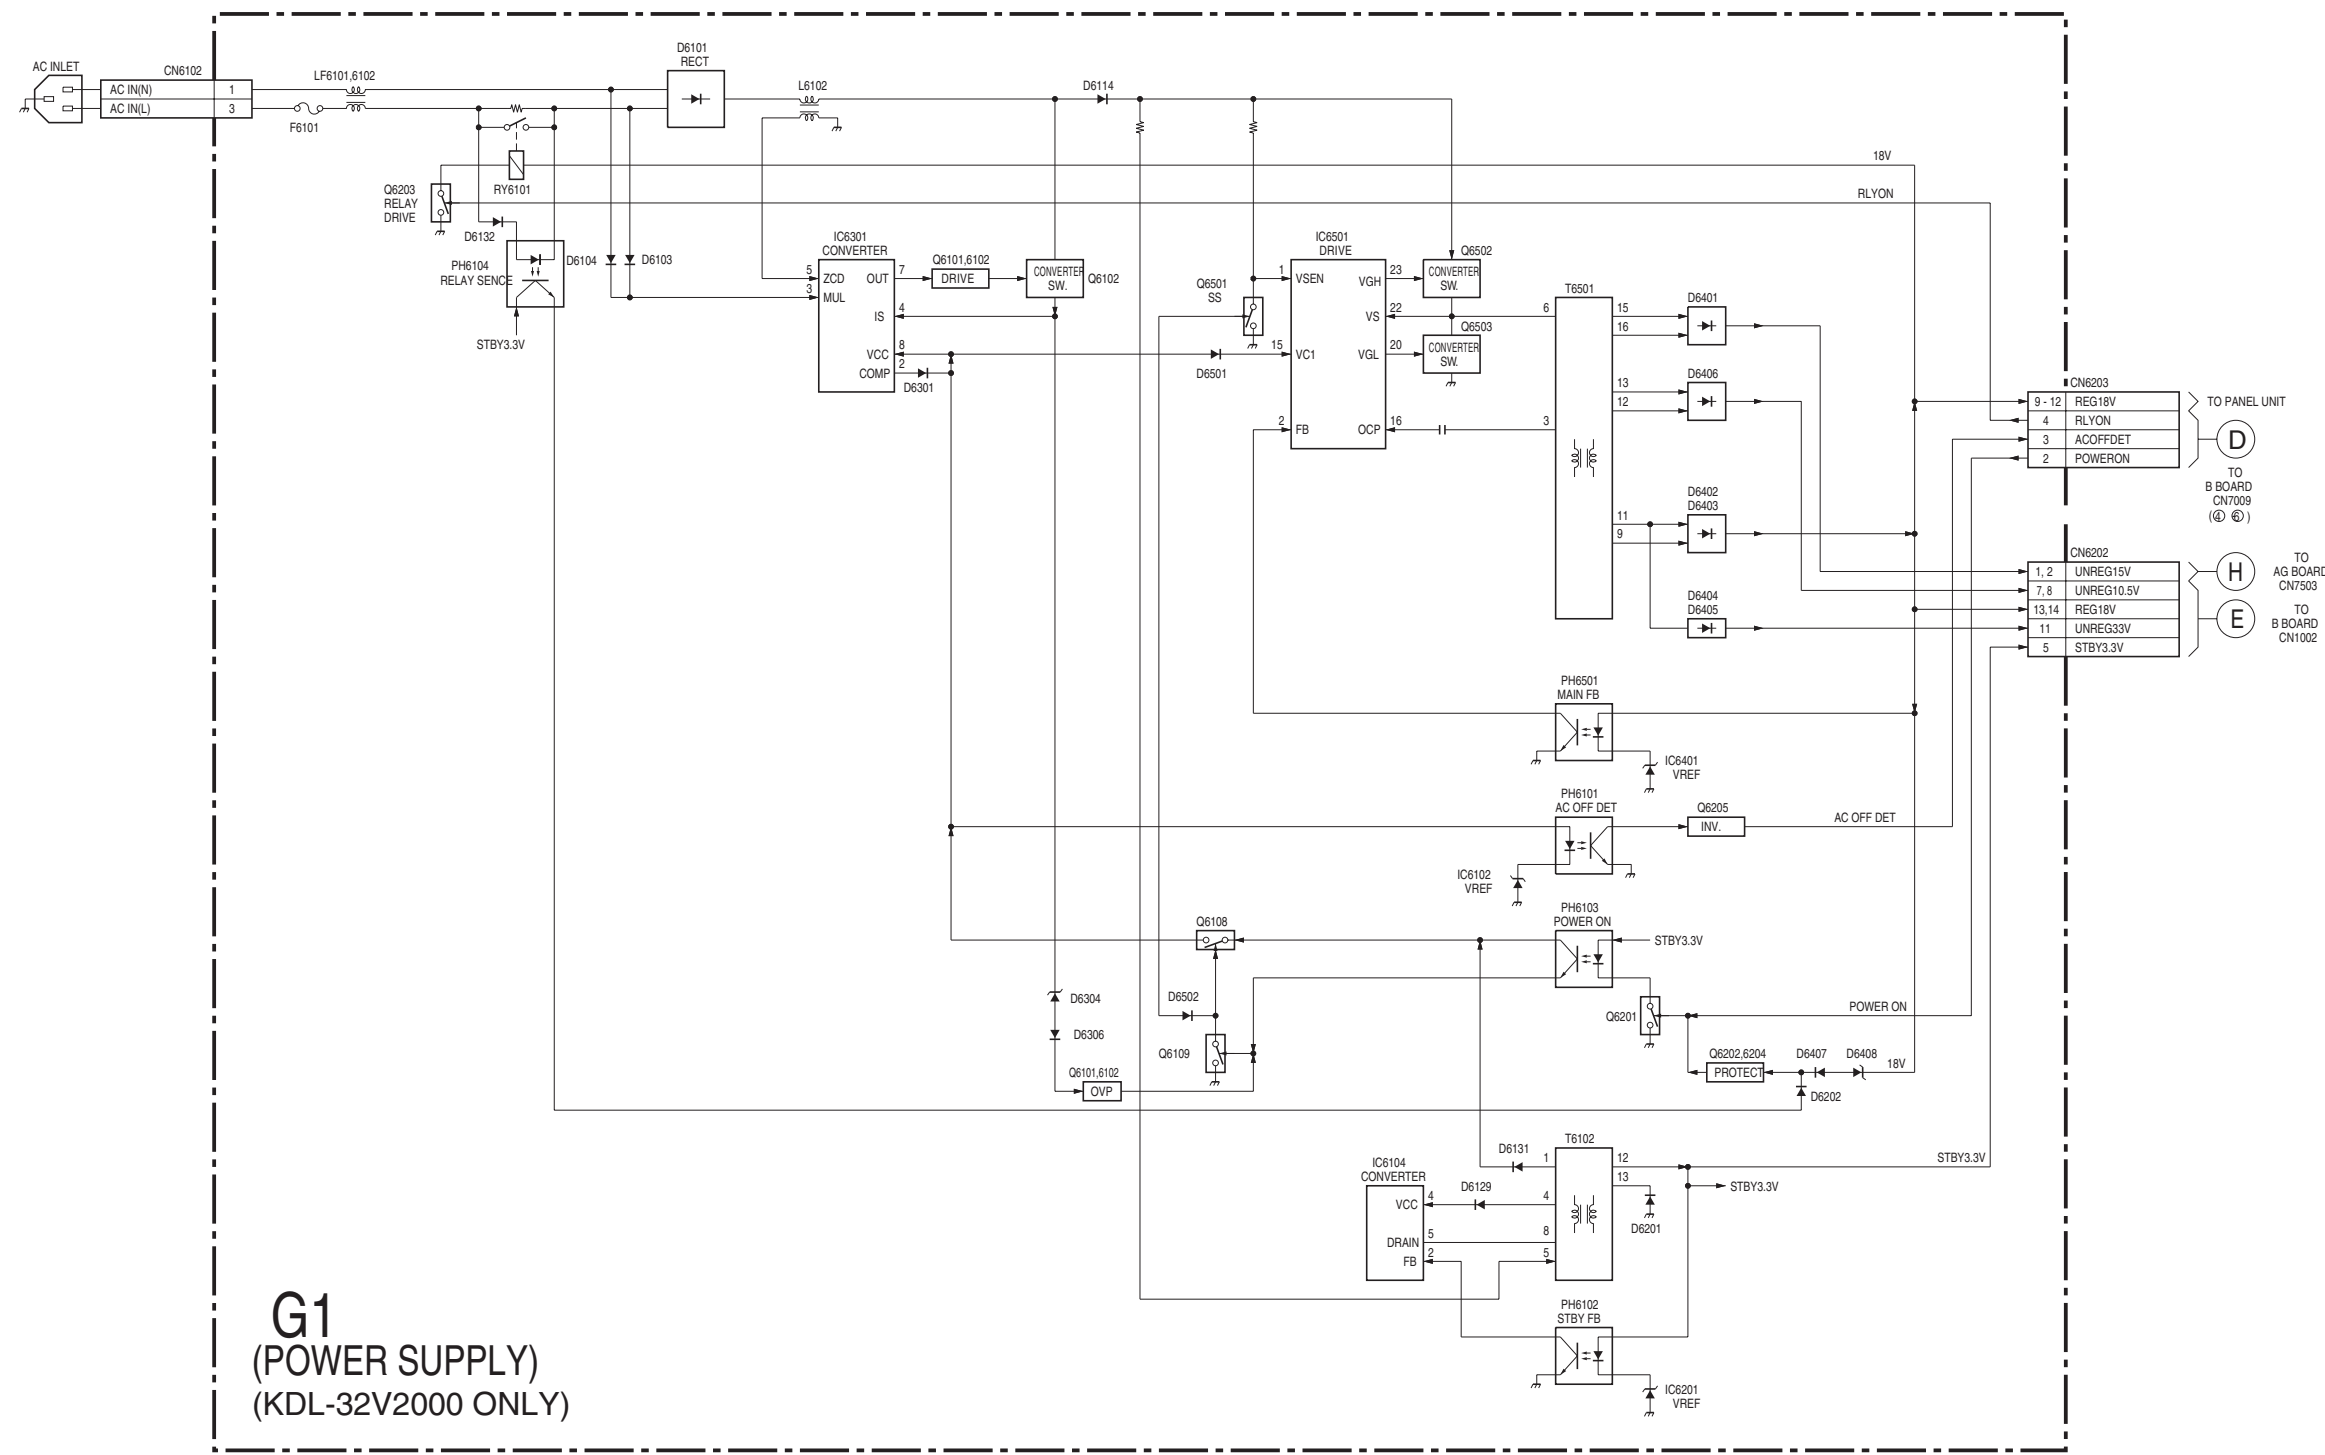

(5) G2A Board

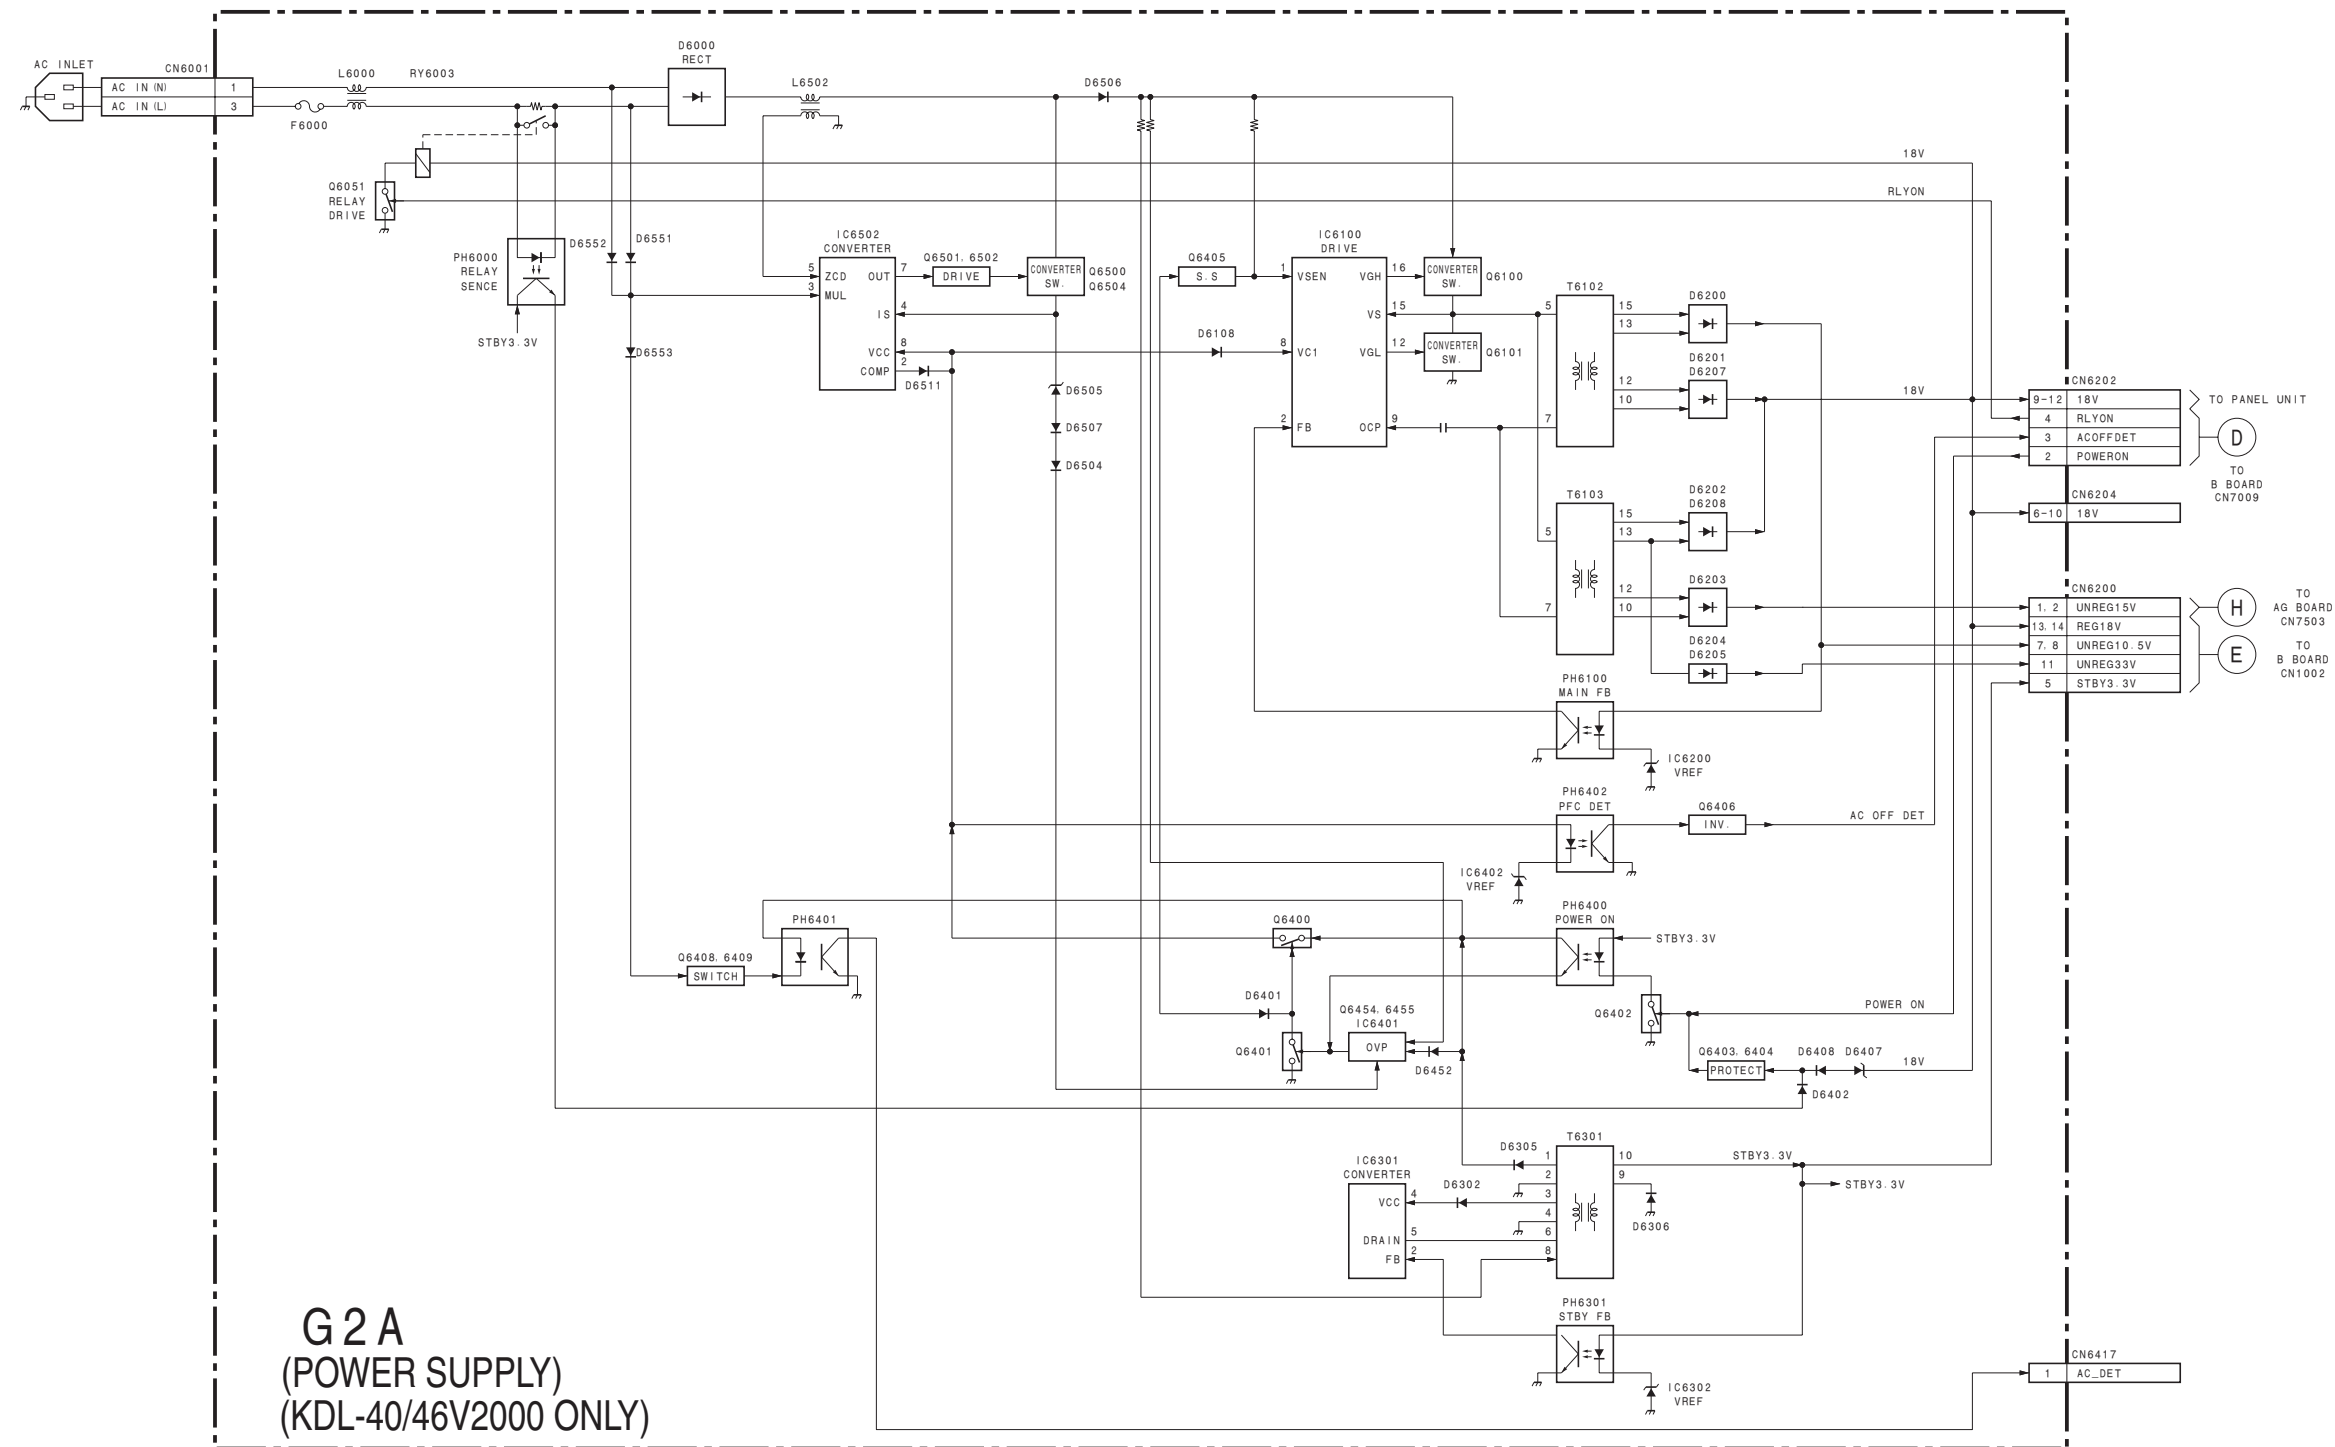

2-3. CIRCUIT BOARDS LOCATION

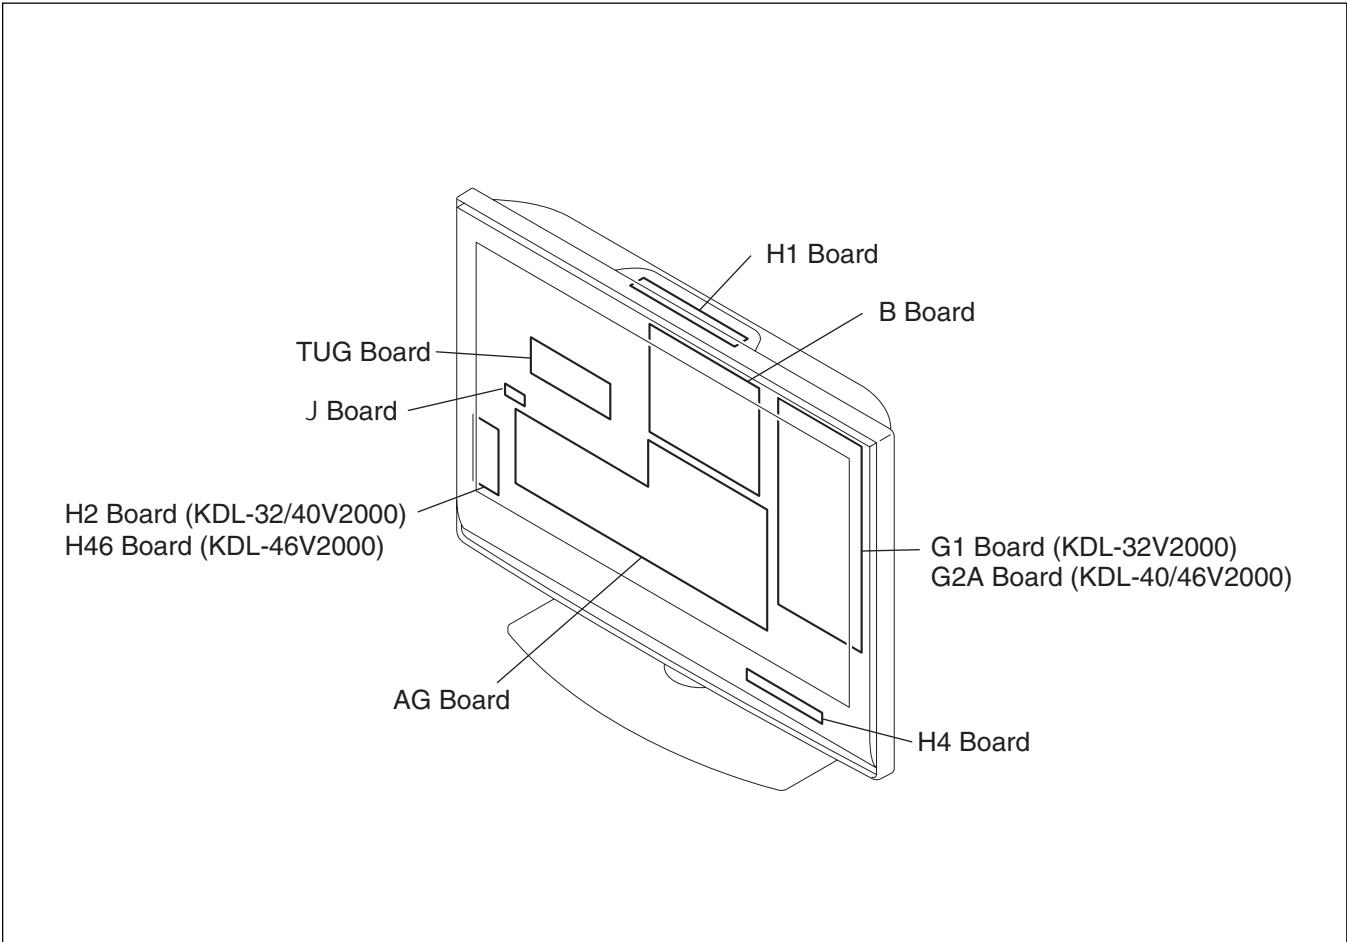

2-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

- Note:**
- Schematic diagrams and printed wiring boards of the specified boards for board replacement service are not included in this section. See Appendix of this manual if you need them.
 - All capacitors are in μF unless otherwise noted. (pF: μF) Capacitors without voltage indication are all 50 V.
 - Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm
Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-ground.
- : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M Ω digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- * : Names and values of parts depend on models.
- * : Can not be measured.
- Circled numbers are waveform references.
- : B + bus.
- : B – bus.
- : Signal path.

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

Note: The components identified by mark contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.


Terminal name of semiconductors in silk screen printed circuit (※)

	Device	Printed symbol	Terminal name	Circuit
①	Transistor		Collector Base Emitter	
②	Transistor		Collector Base Emitter	
③	Diode		Cathode Anode	
④	Diode		Cathode Anode (NC)	
⑤	Diode		Cathode Anode (NC)	
⑥	Diode		Common Anode Cathode	
⑦	Diode		Common Anode Cathode	
⑧	Diode		Common Anode Anode	
⑨	Diode		Common Anode Anode	
⑩	Diode		Common Cathode Cathode	
⑪	Diode		Common Cathode Cathode	
⑫	Diode		Anode Anode Cathode Anode	
⑬	Transistor (FET)		Drain Source Gate	
⑭	Transistor (FET)		Drain Source Gate	
⑮	Transistor (FET)		Source Drain Gate	
⑯	Transistor		Emitter Collector Base	
⑰	Transistor		C2/B1/E1 E2/B2/C1	
⑱	Transistor		C1/B2/E2 E1/B1/C2	
⑲	Transistor		C1 B2 E2 E1 B1 C2	
⑳	Transistor		C1 B2 E2 E1 B1 C2	
㉑	Transistor		E2 B1 E1 C2 C1(B2)	
㉒	Transistor		(B2) B1 E1 E2 C1 C2	
㉓	Transistor		(B2) E2 E1 B1 C2 C1	
—	Discrete semiconductor			


(Chip semiconductors that are not actually used are included.)

Ver.1.6

(1) AG Board (1/2-2/2)

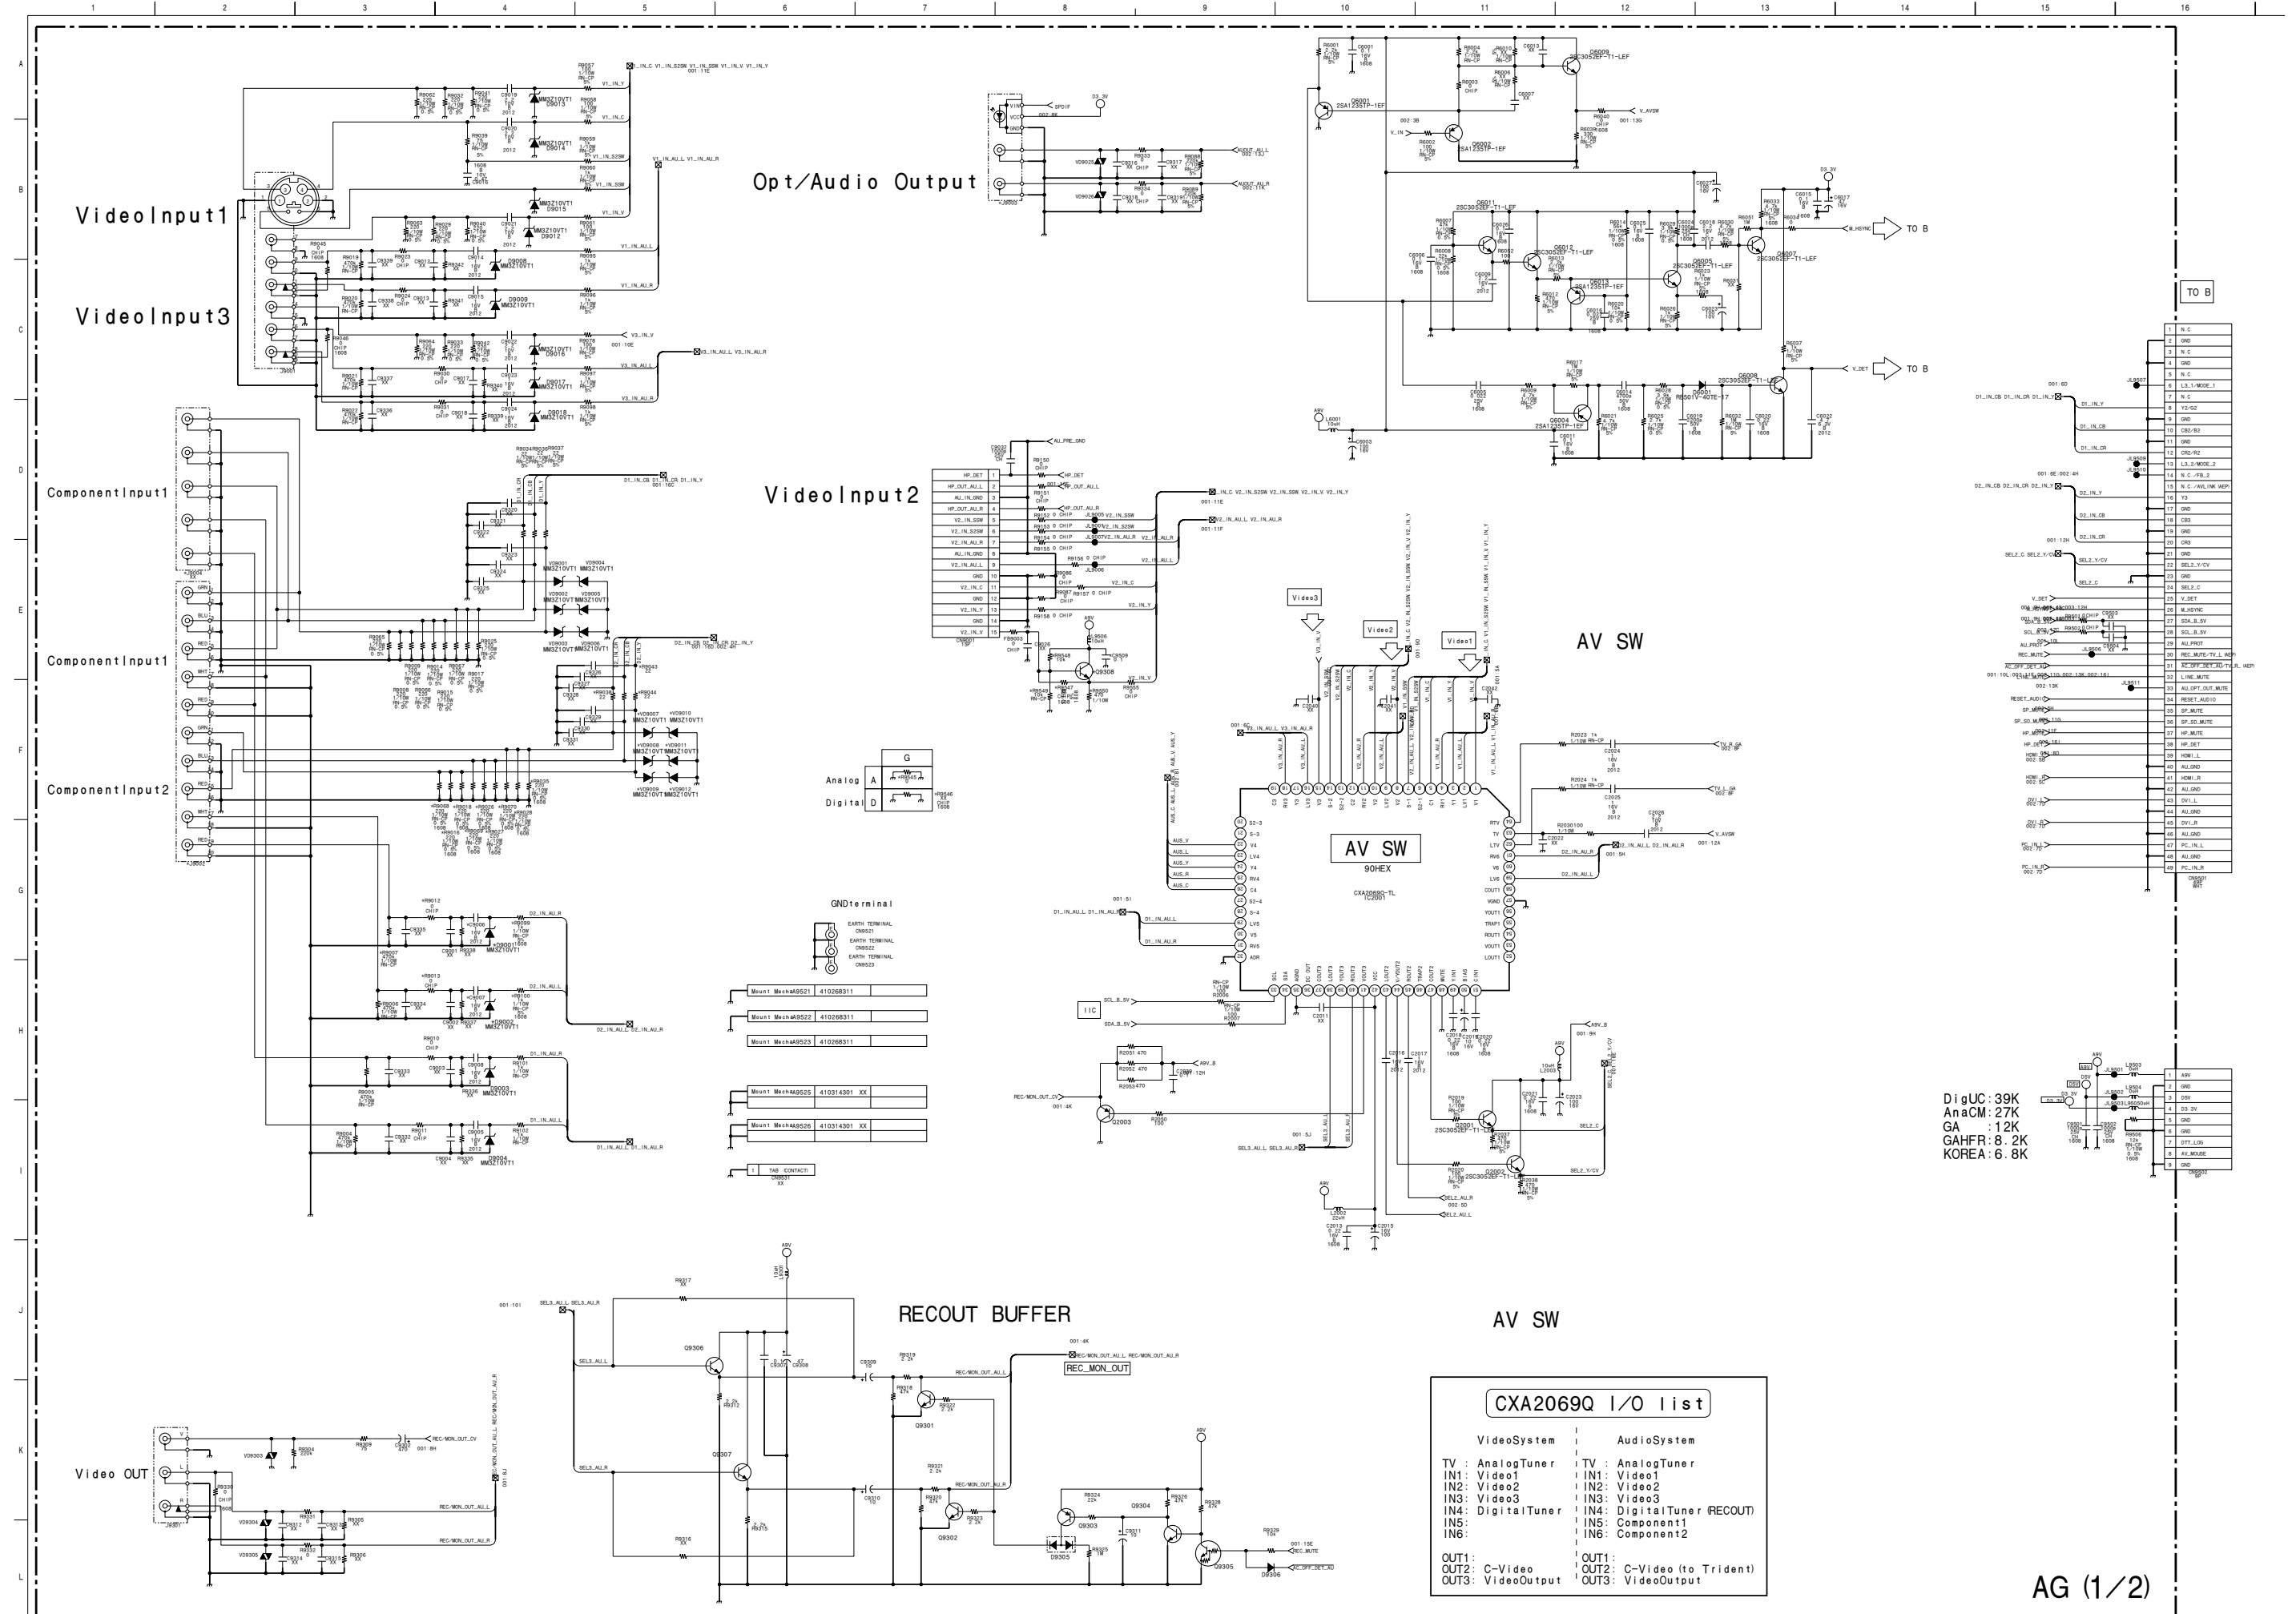

AG (1/2)

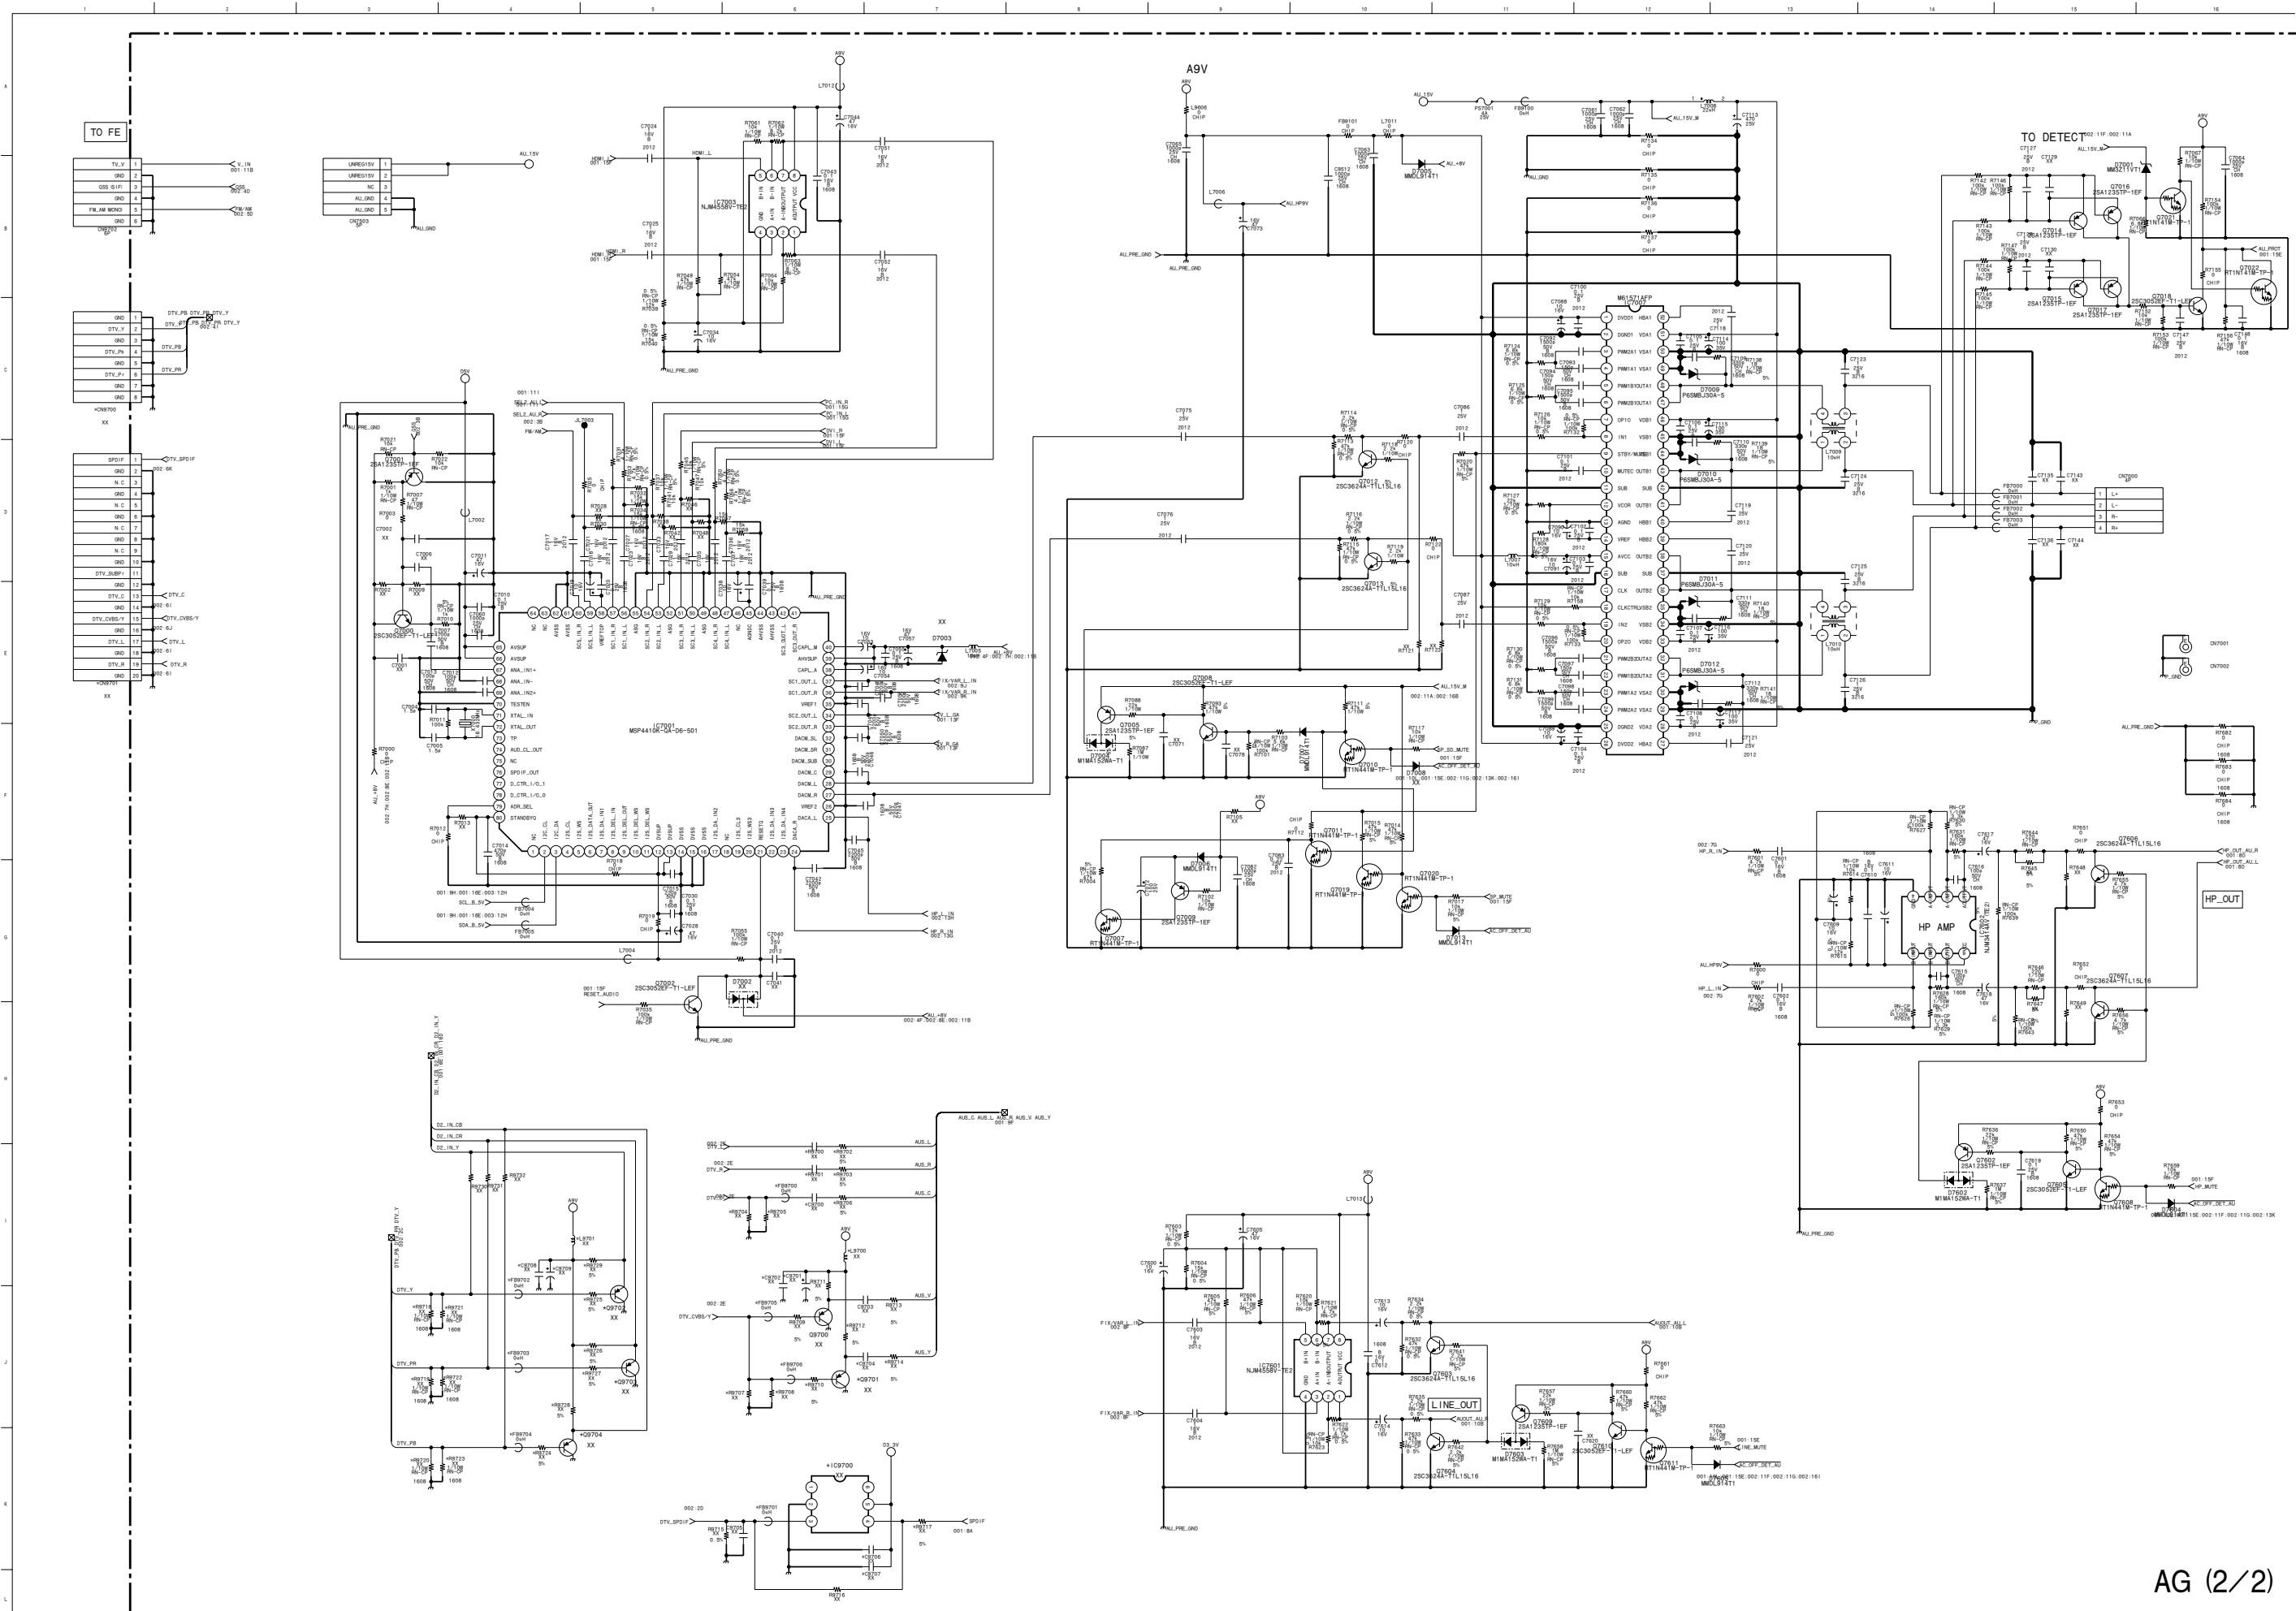

AG (2/2)

<COMPONENT SIDE>

The floor plan shows a large rectangular booth area with a grid of columns (1-33) and rows (A-J). The booth is divided into several sections by walls and equipment. Key features include:

- Equipment:** Numerous hydraulic components are displayed, including pumps, valves, cylinders, and actuators, labeled with part numbers like C101, C102, C103, etc.
- Seating:** Several circular and rectangular tables are arranged throughout the booth, likely for demonstrations or meetings.
- Service Counter:** A large rectangular counter is located in the lower right corner, near the Sony AG logo.
- Logo and Contact Info:** The Sony AG logo is prominently displayed in the lower right corner, along with the phone number 1-870-445-21 and the alphanumeric code A-1182-675-A.

<CONDUCTOR SIDE>

1

2

3

4

5

6

7

8

9

10

11

12

A

WAX2 B_BOARD

Page.1

001.sht

Table of Contents

Page.2

002.sht

MAIN μCON

ref.1001~

Page.3

003.sht

SVP-PX (1/2)

ref.5000~

Page.4

004.sht

SVP-PX (2/2)

ref.5200~

Page.5

005.sht

DDR SDRAM

ref.5500~

Page.6

006.sht

AUTO WIDE

ref.5700~

Page.7

007.sht

PC Connector

ref.6000~

Page.8

008.sht

HDMI & D/A

ref.9000~

Page.9

009.sht

POWER

ref.7000~

Page.10

010.sht

DC_ALERT

ref.7500~

Page.11

011.sht

B TO F/E


ref.4700~


Page.12

012.sht


B TO TUNER

ref.1700~

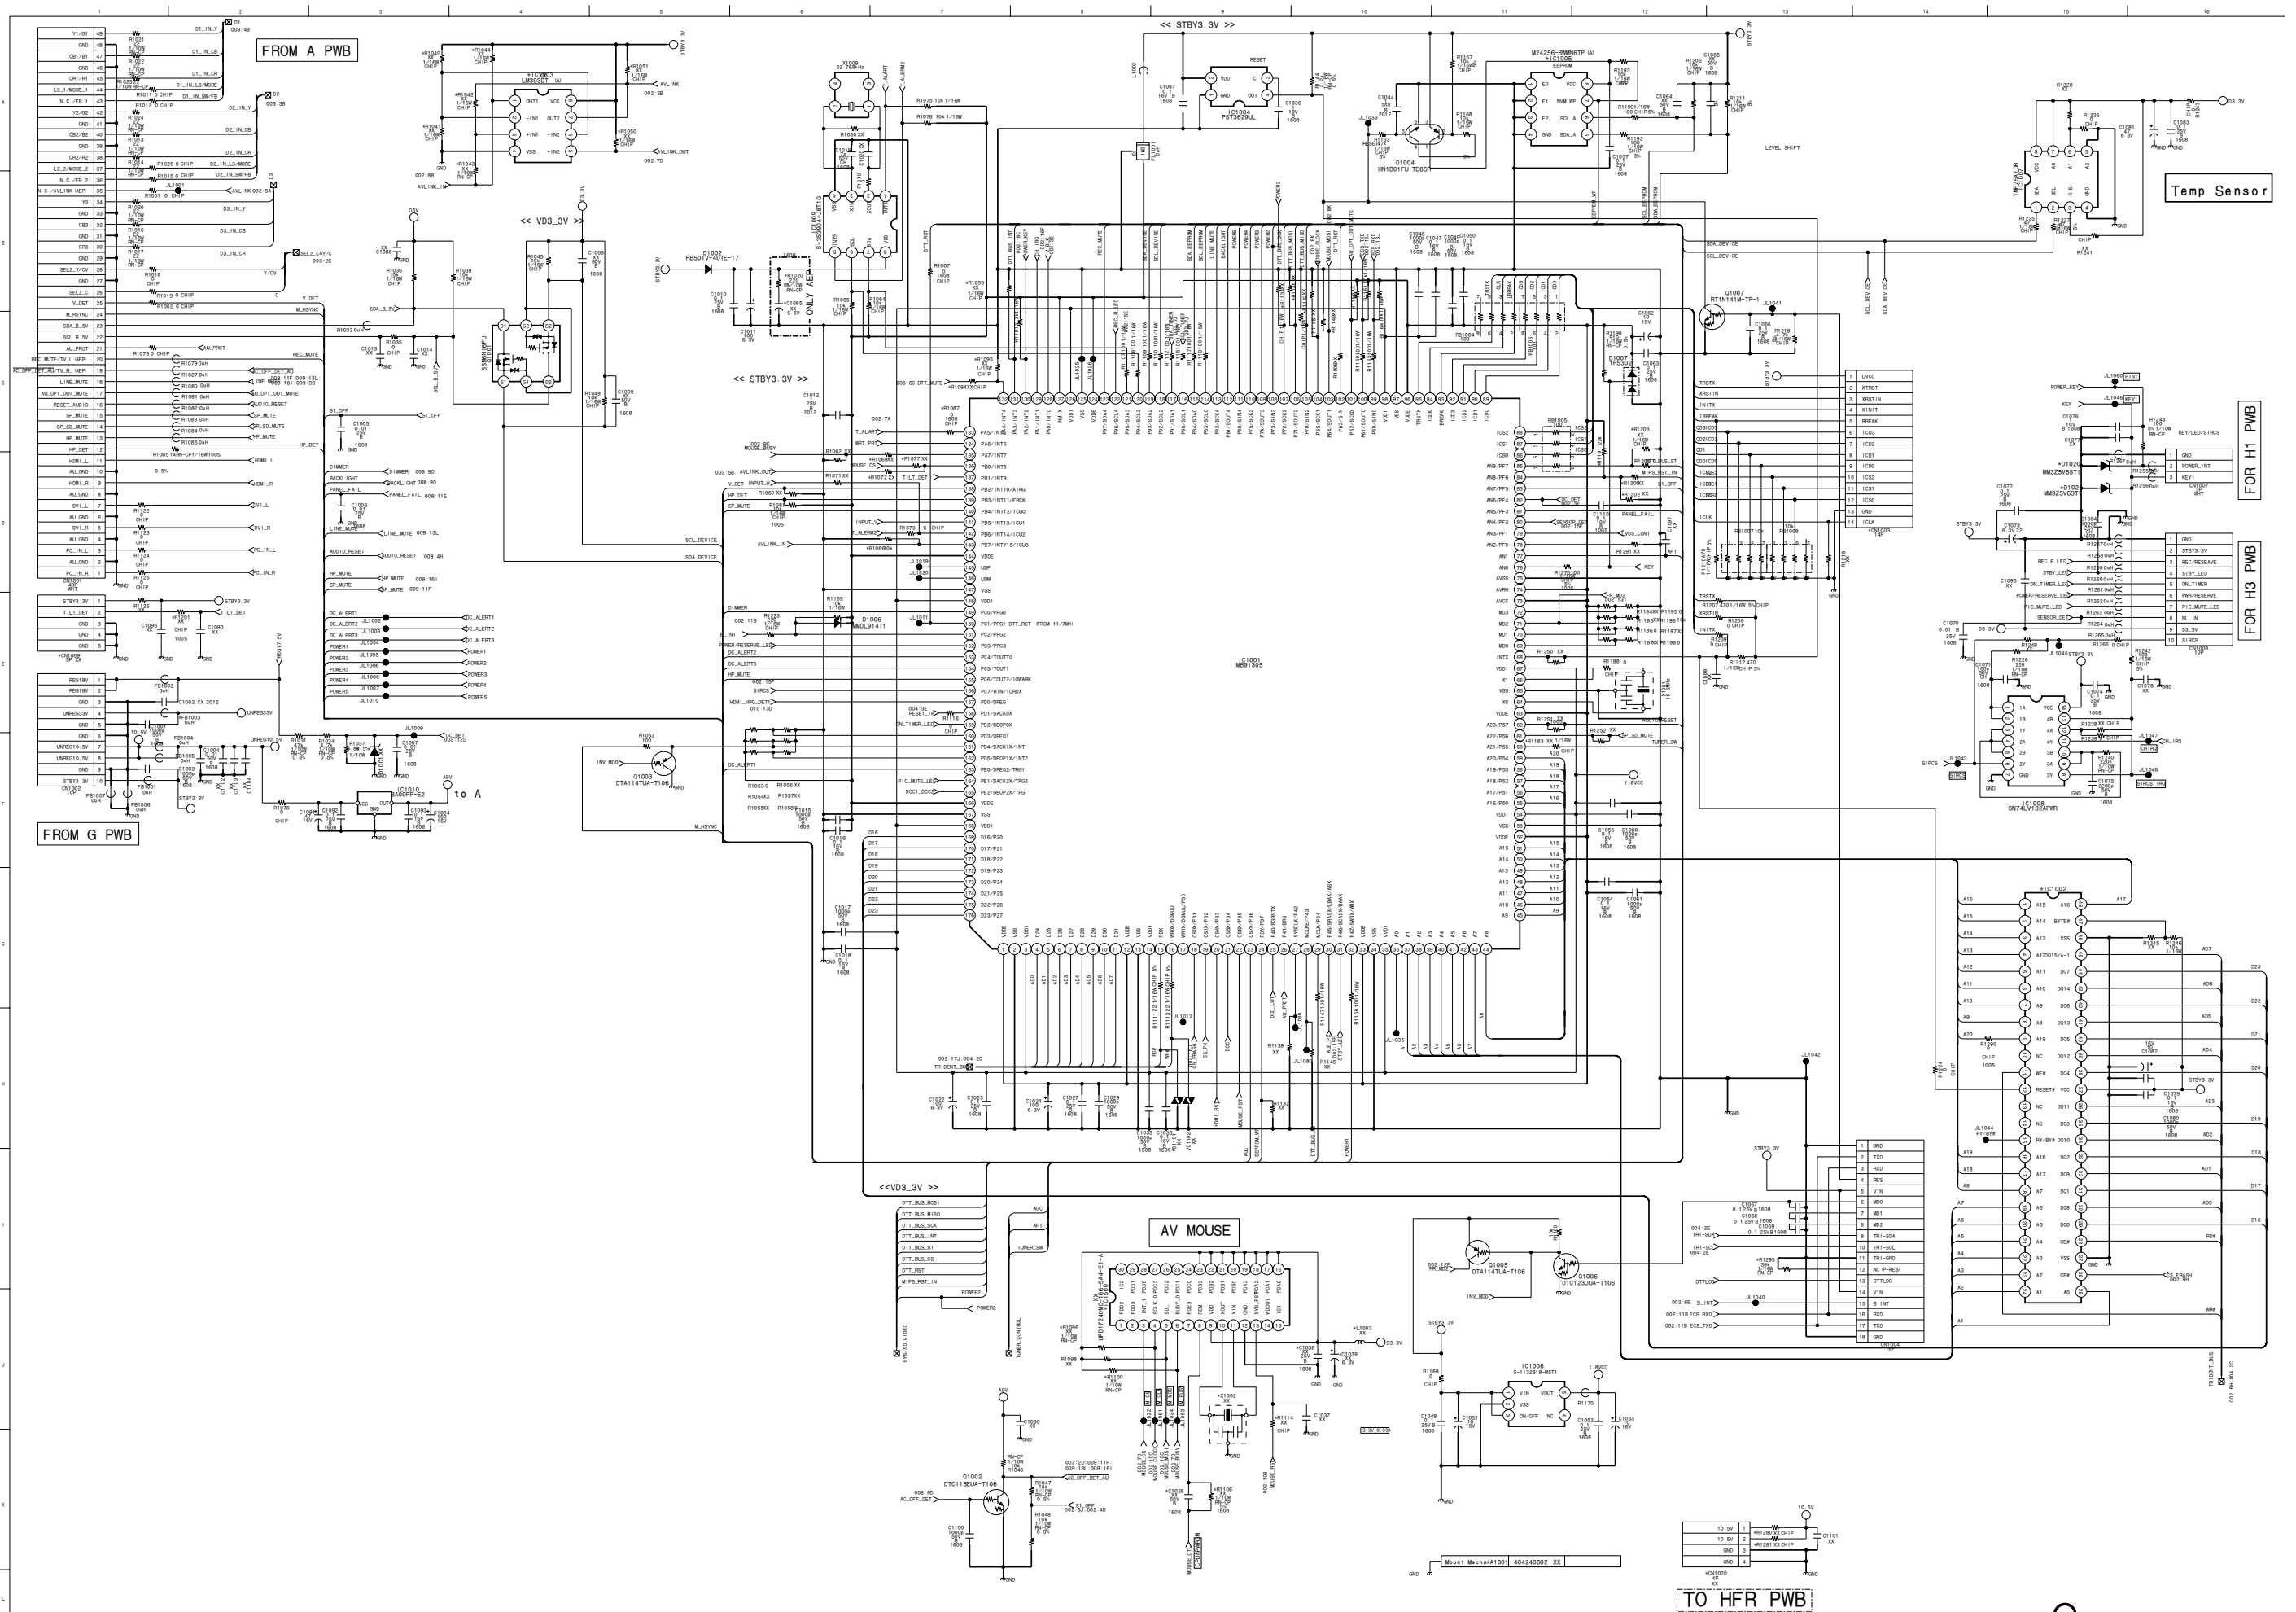

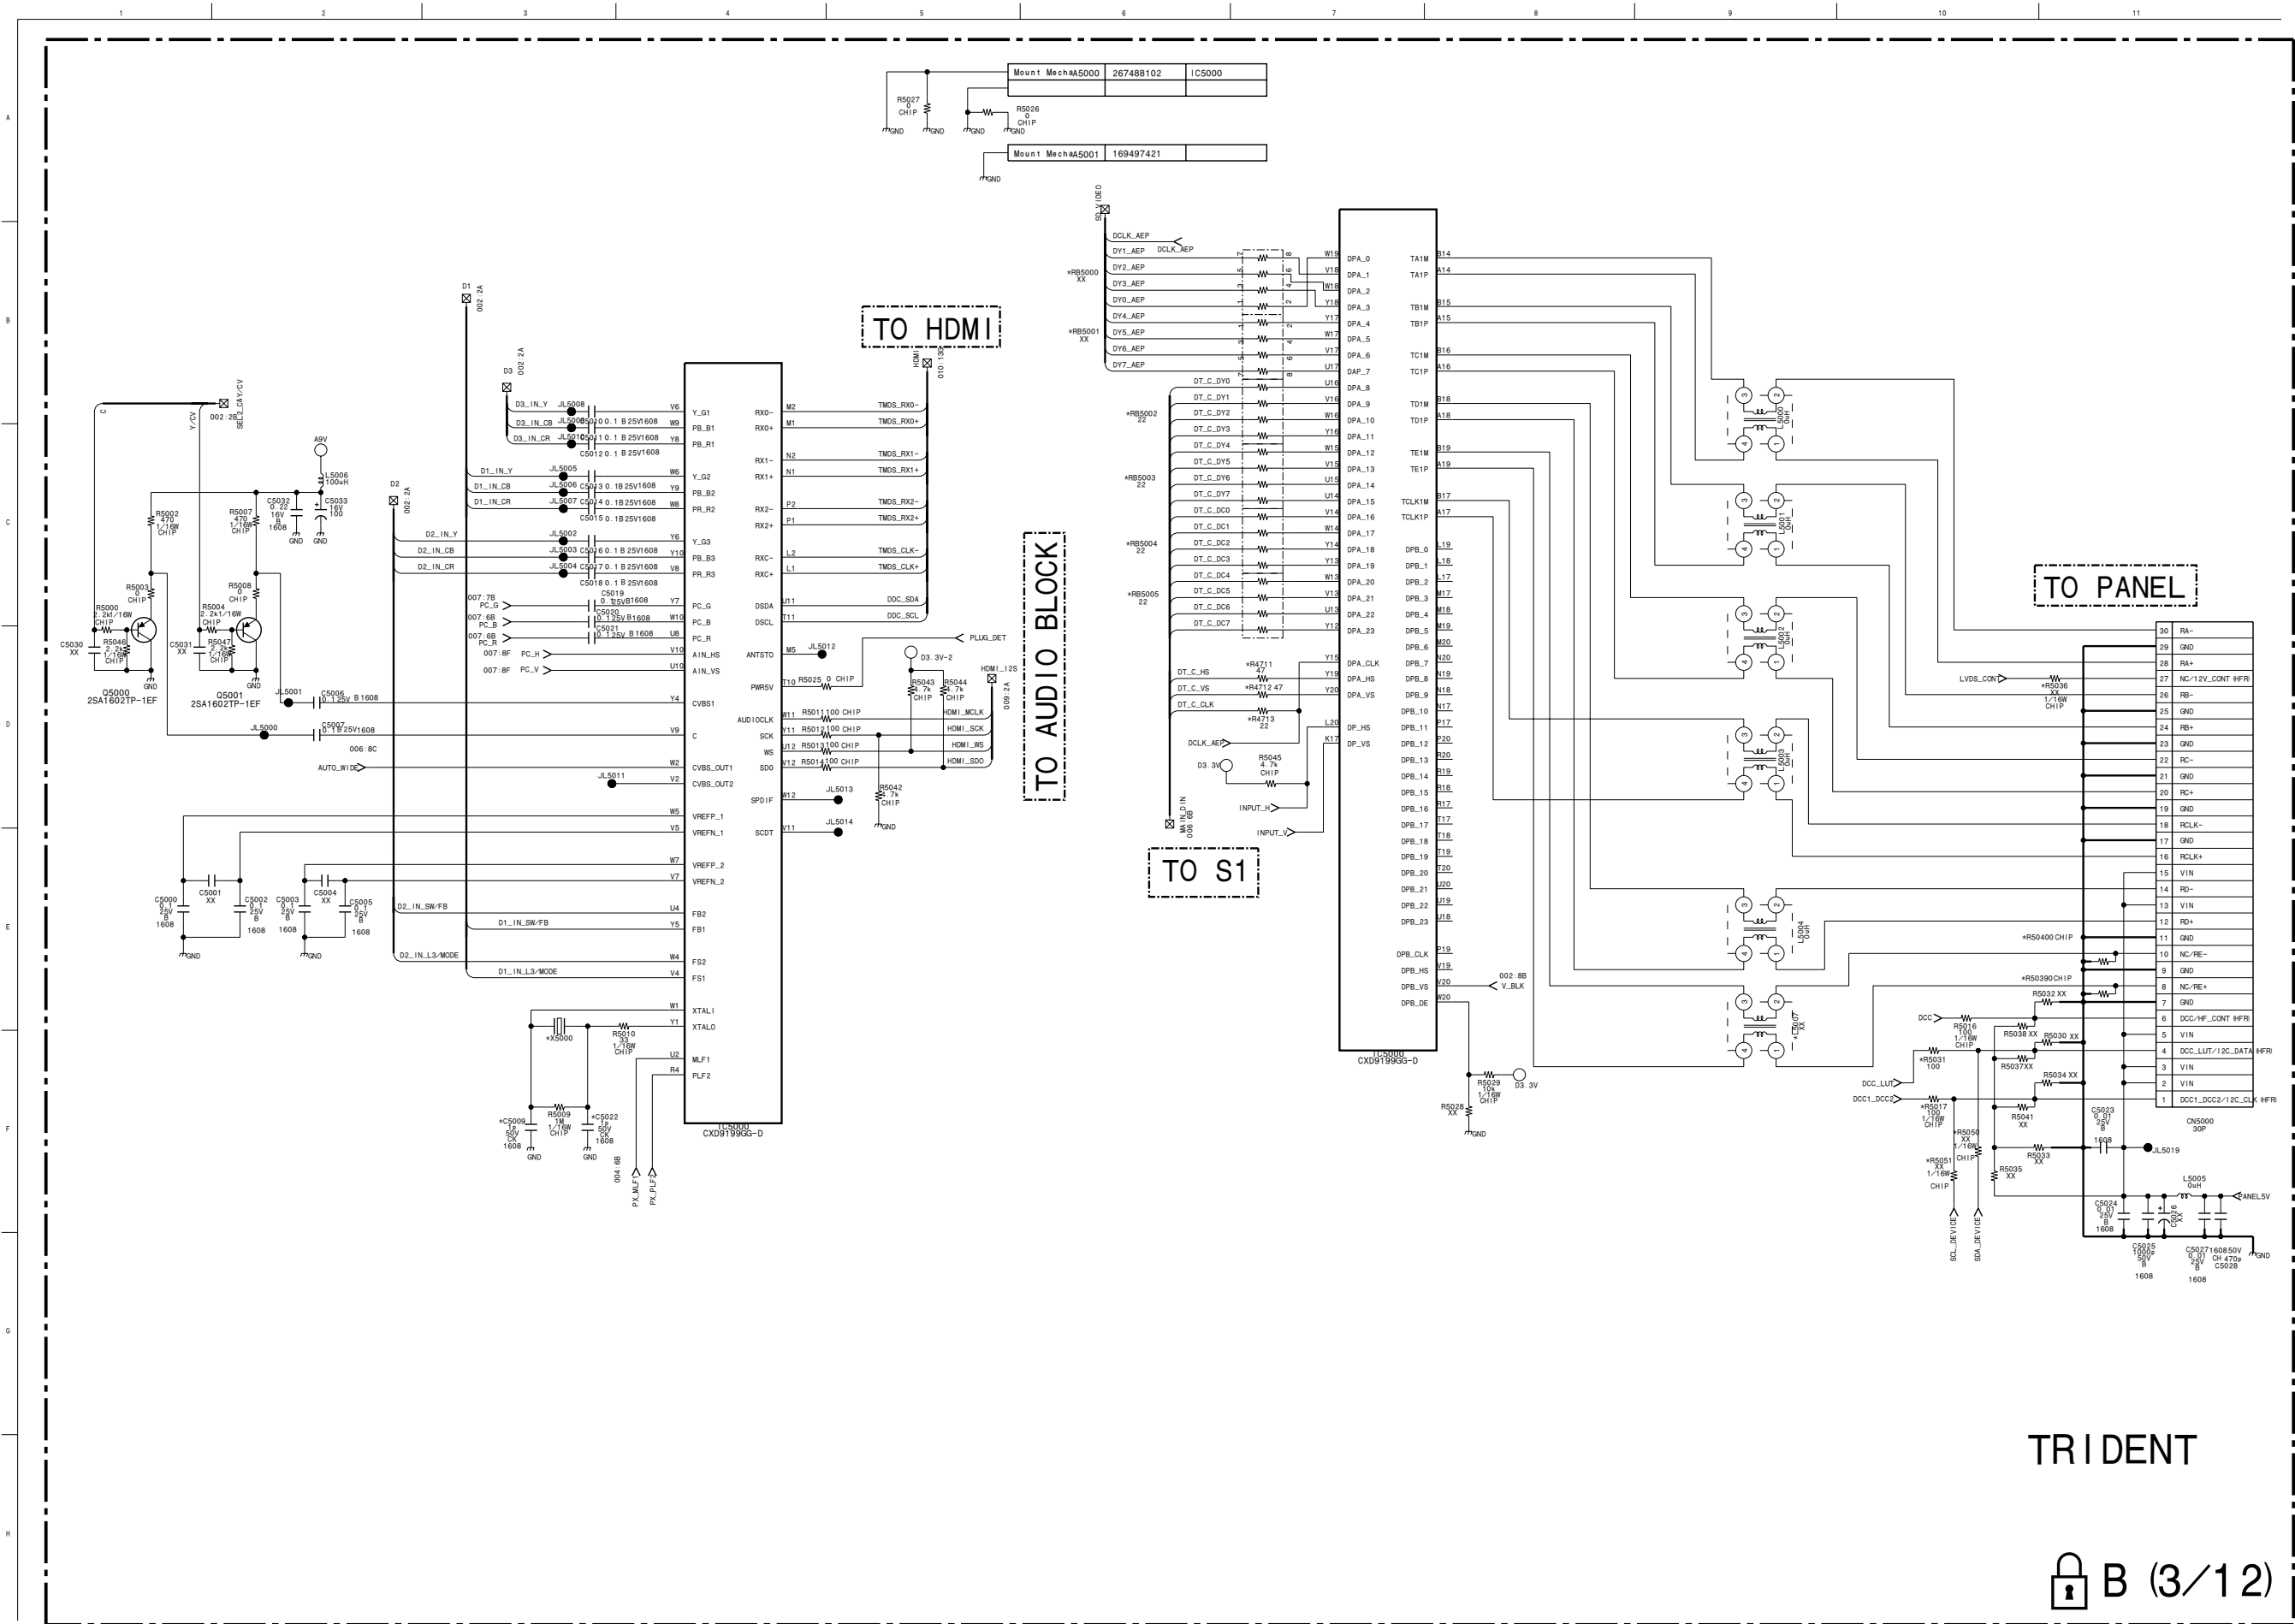


□ SVP-PX (2/2) DDR & CPU I/F, POWER & GND

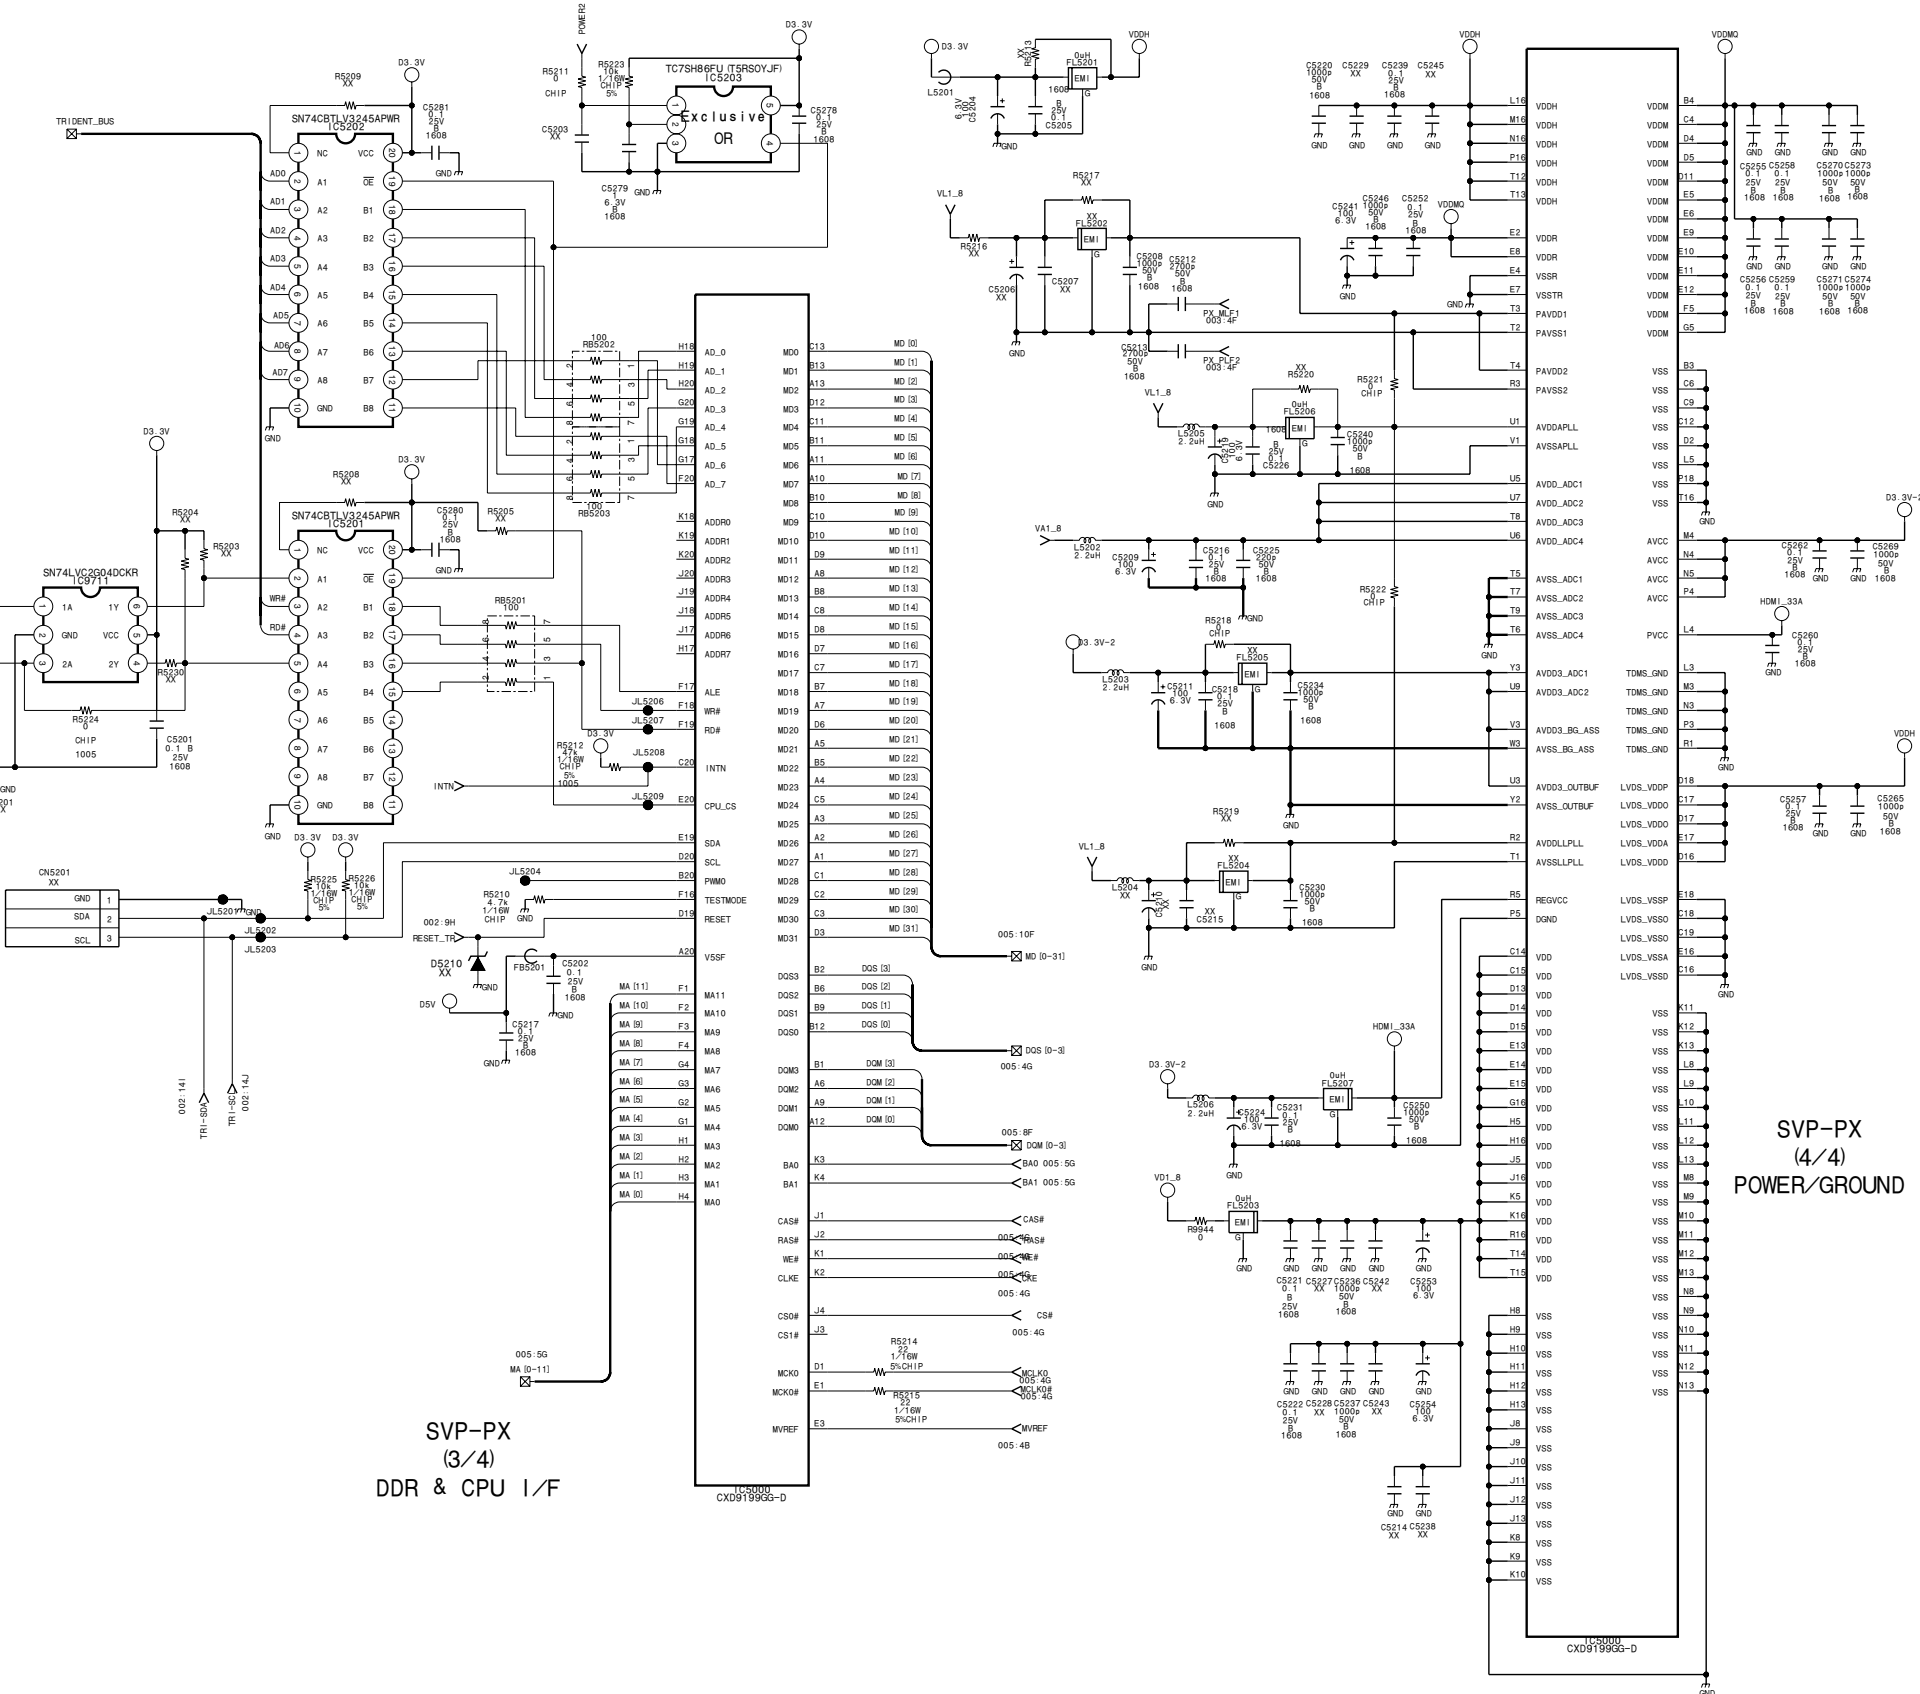


TRIDENT


 B (4/1 2)


□ DDR_SDRAM 128Mb i t

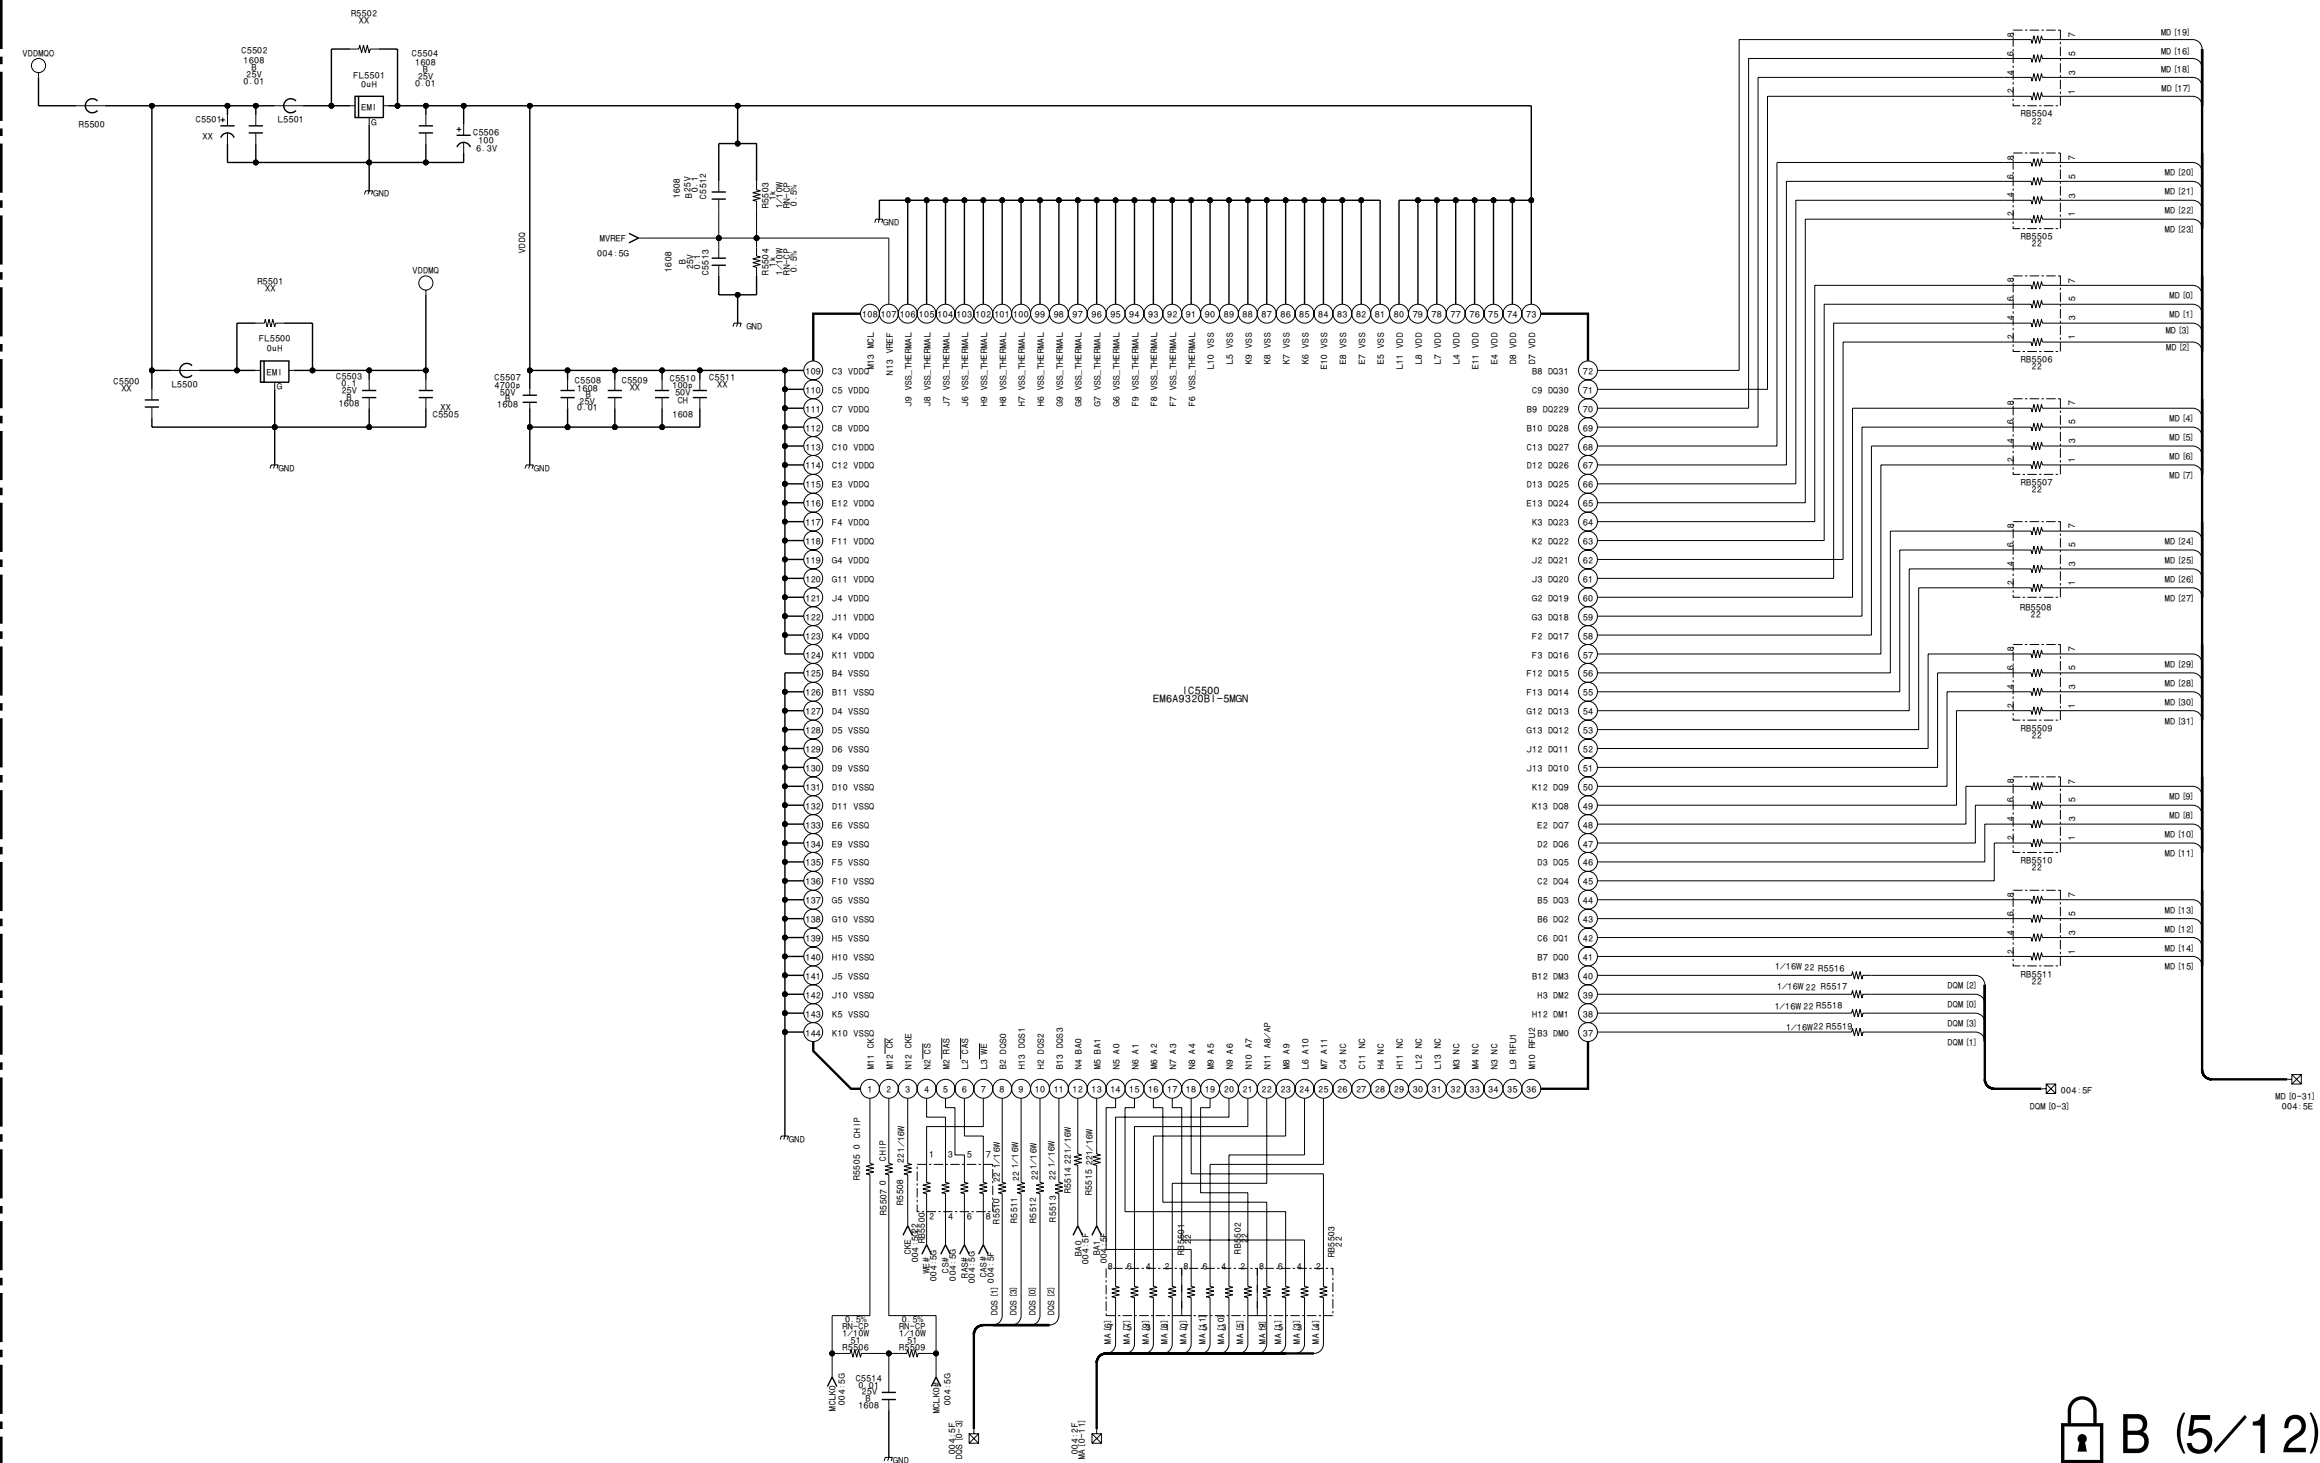


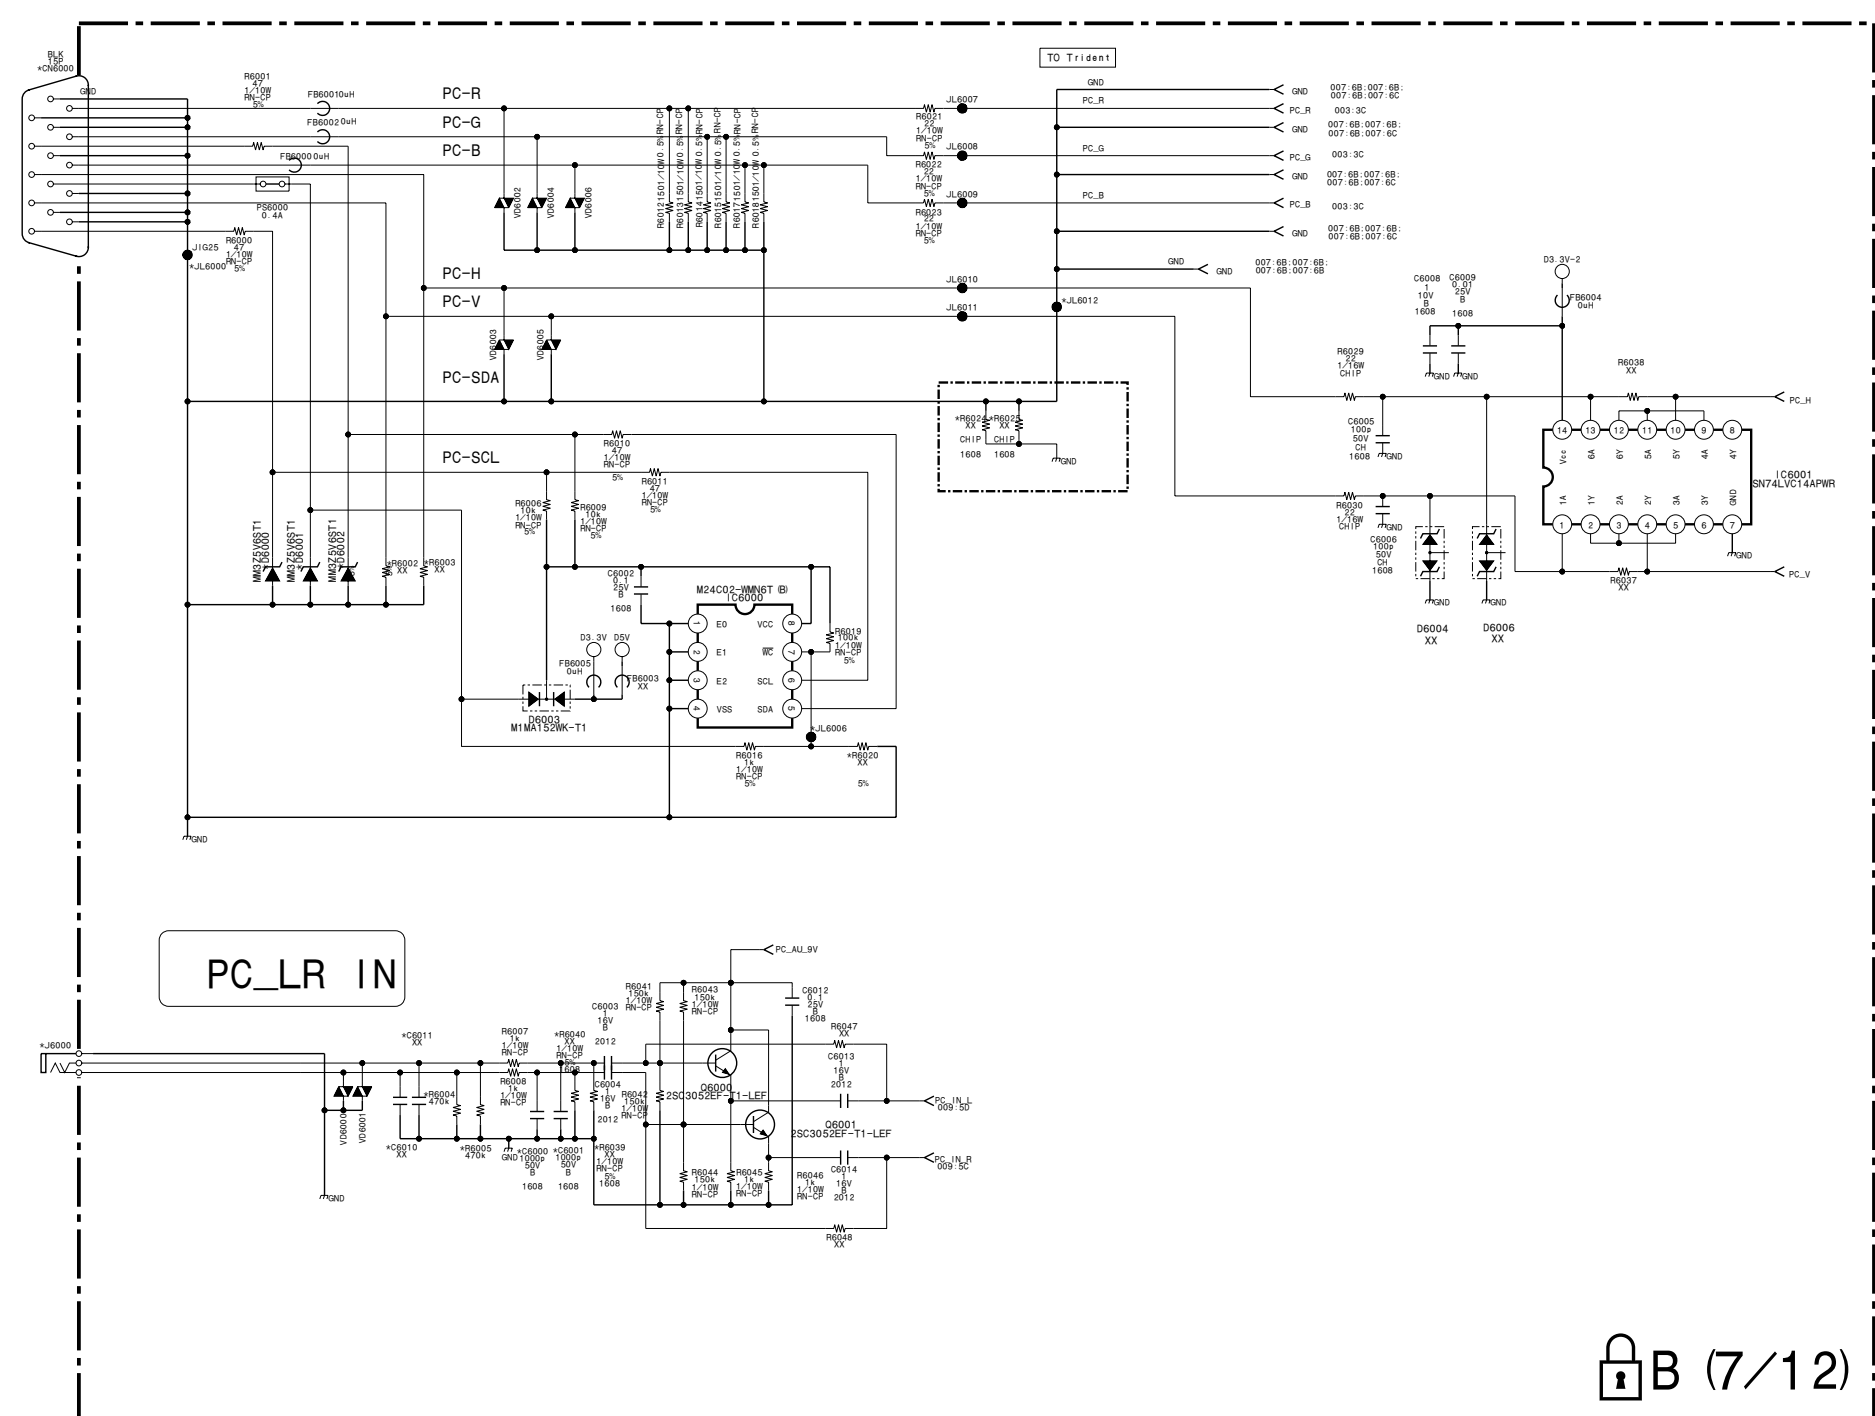

🔒 B (7/12)

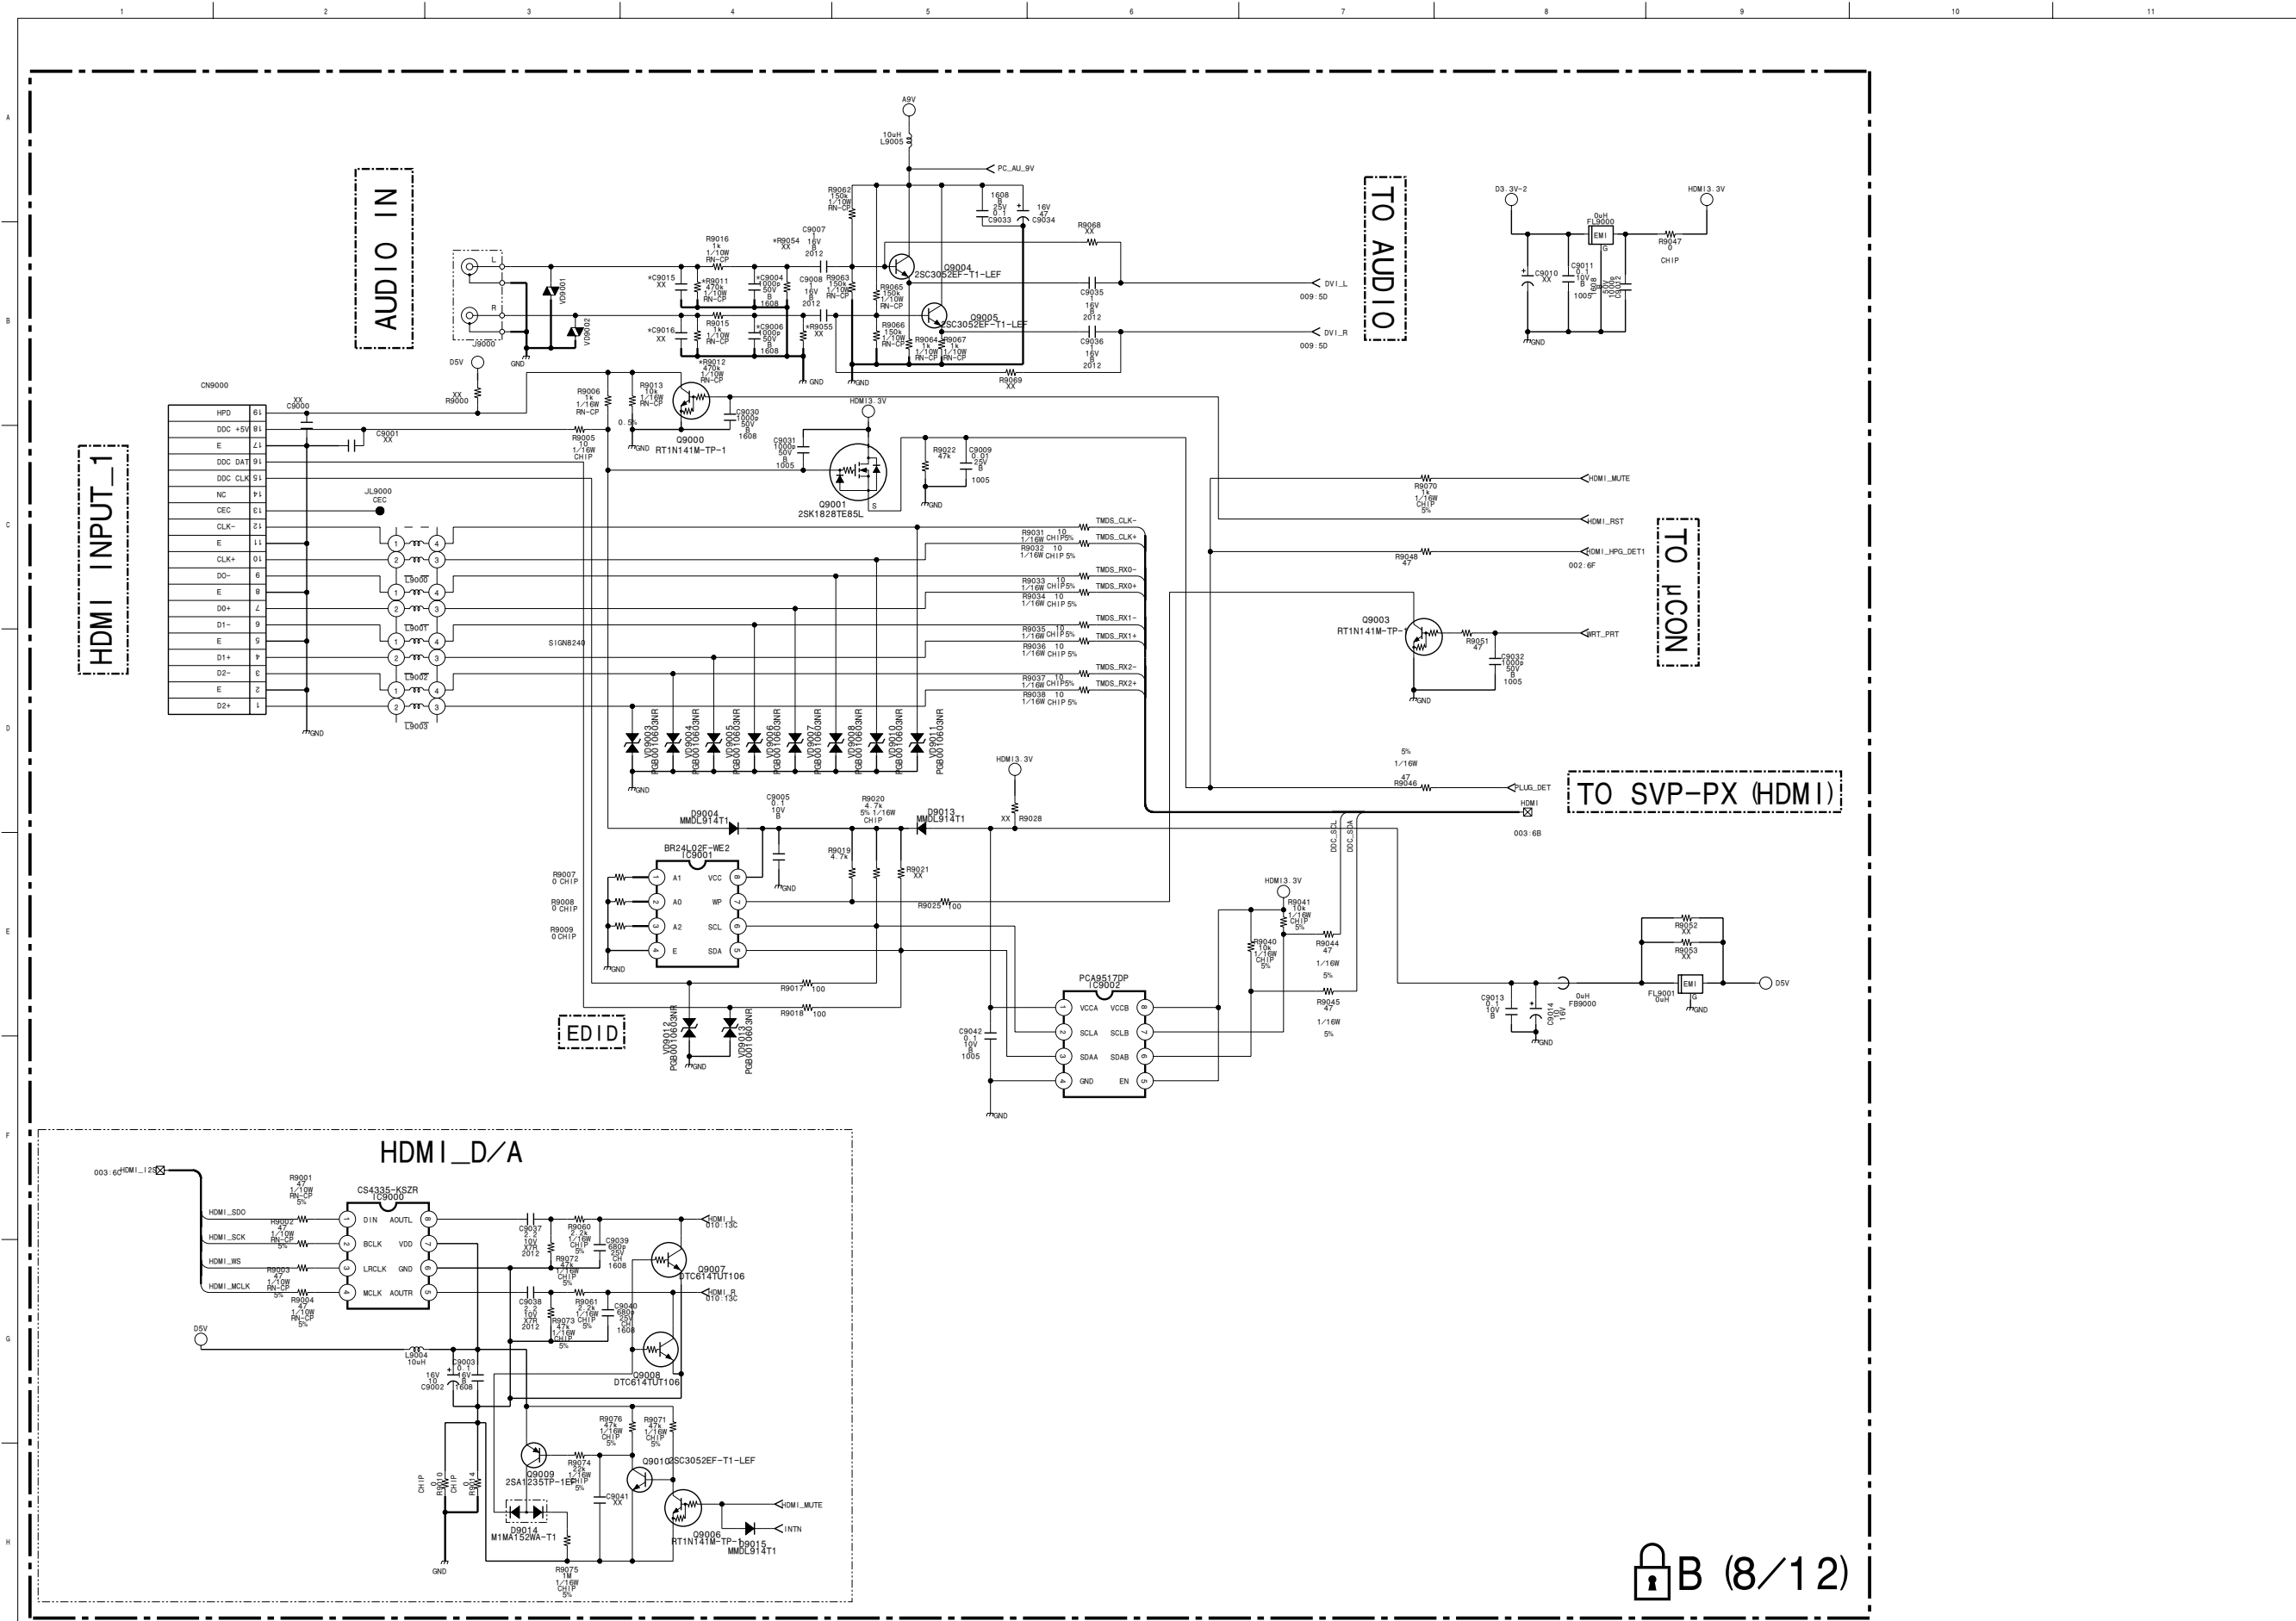




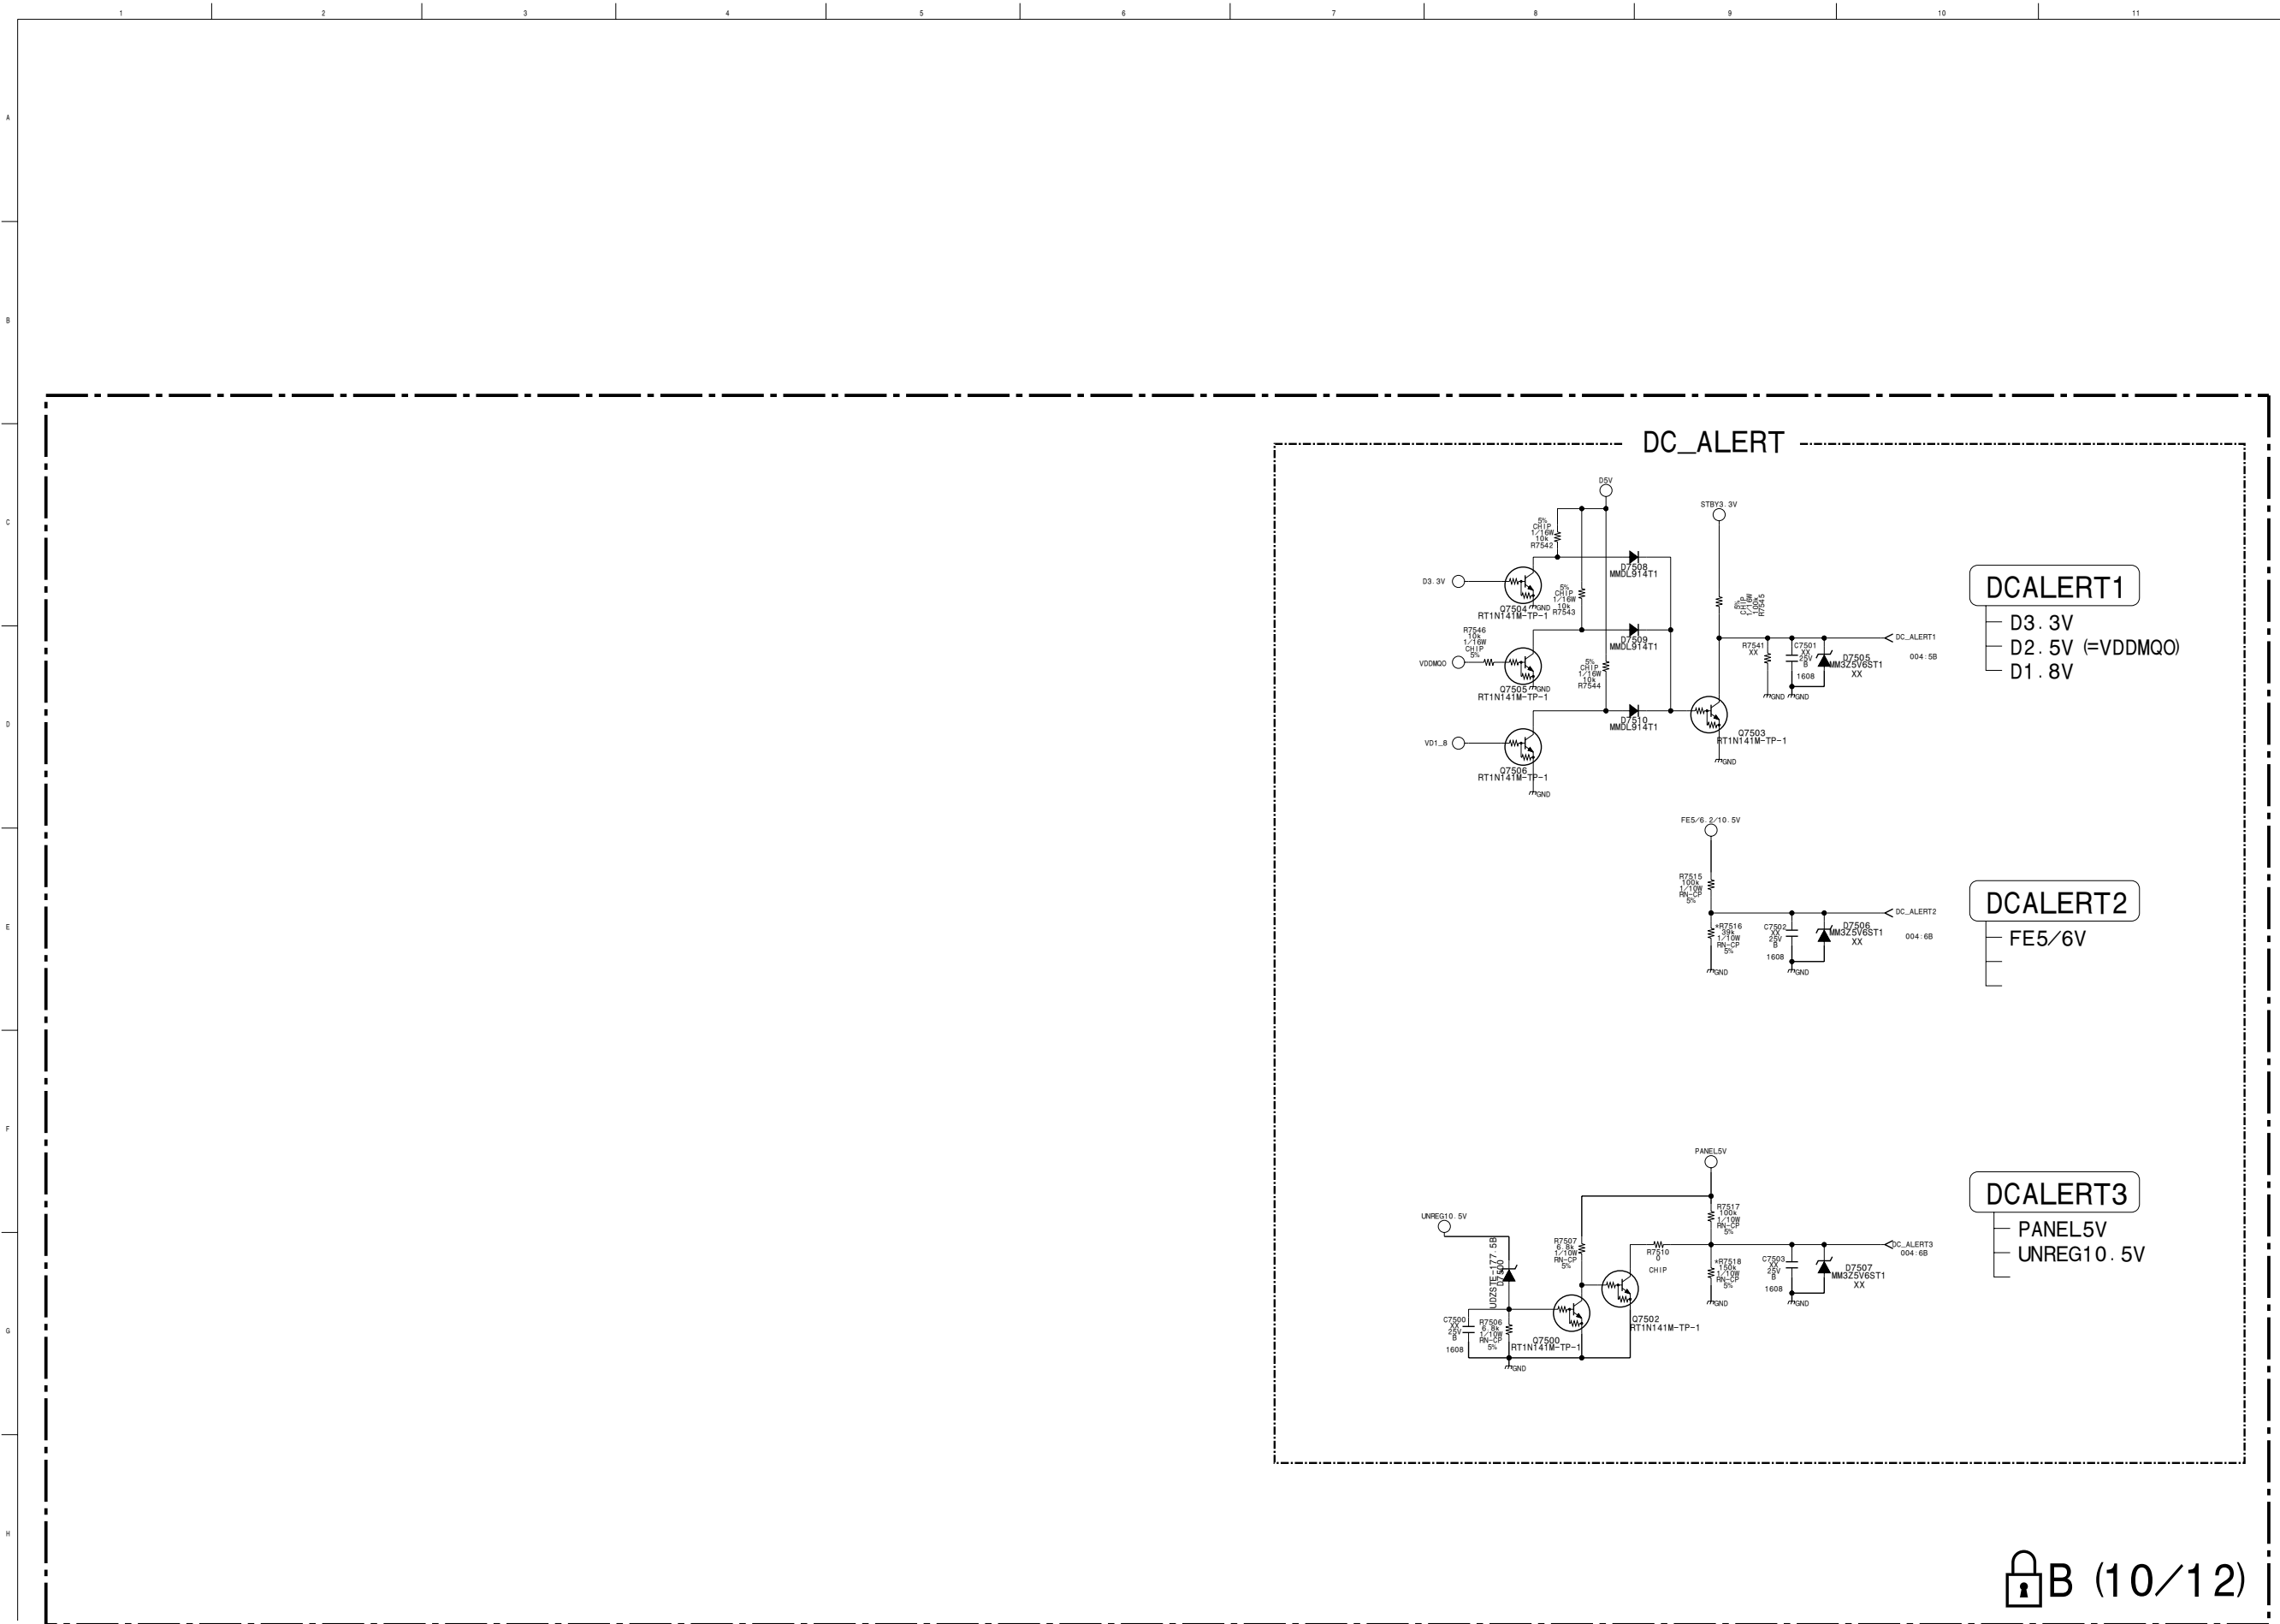

B


— B BOARD —

B BOARD (A)

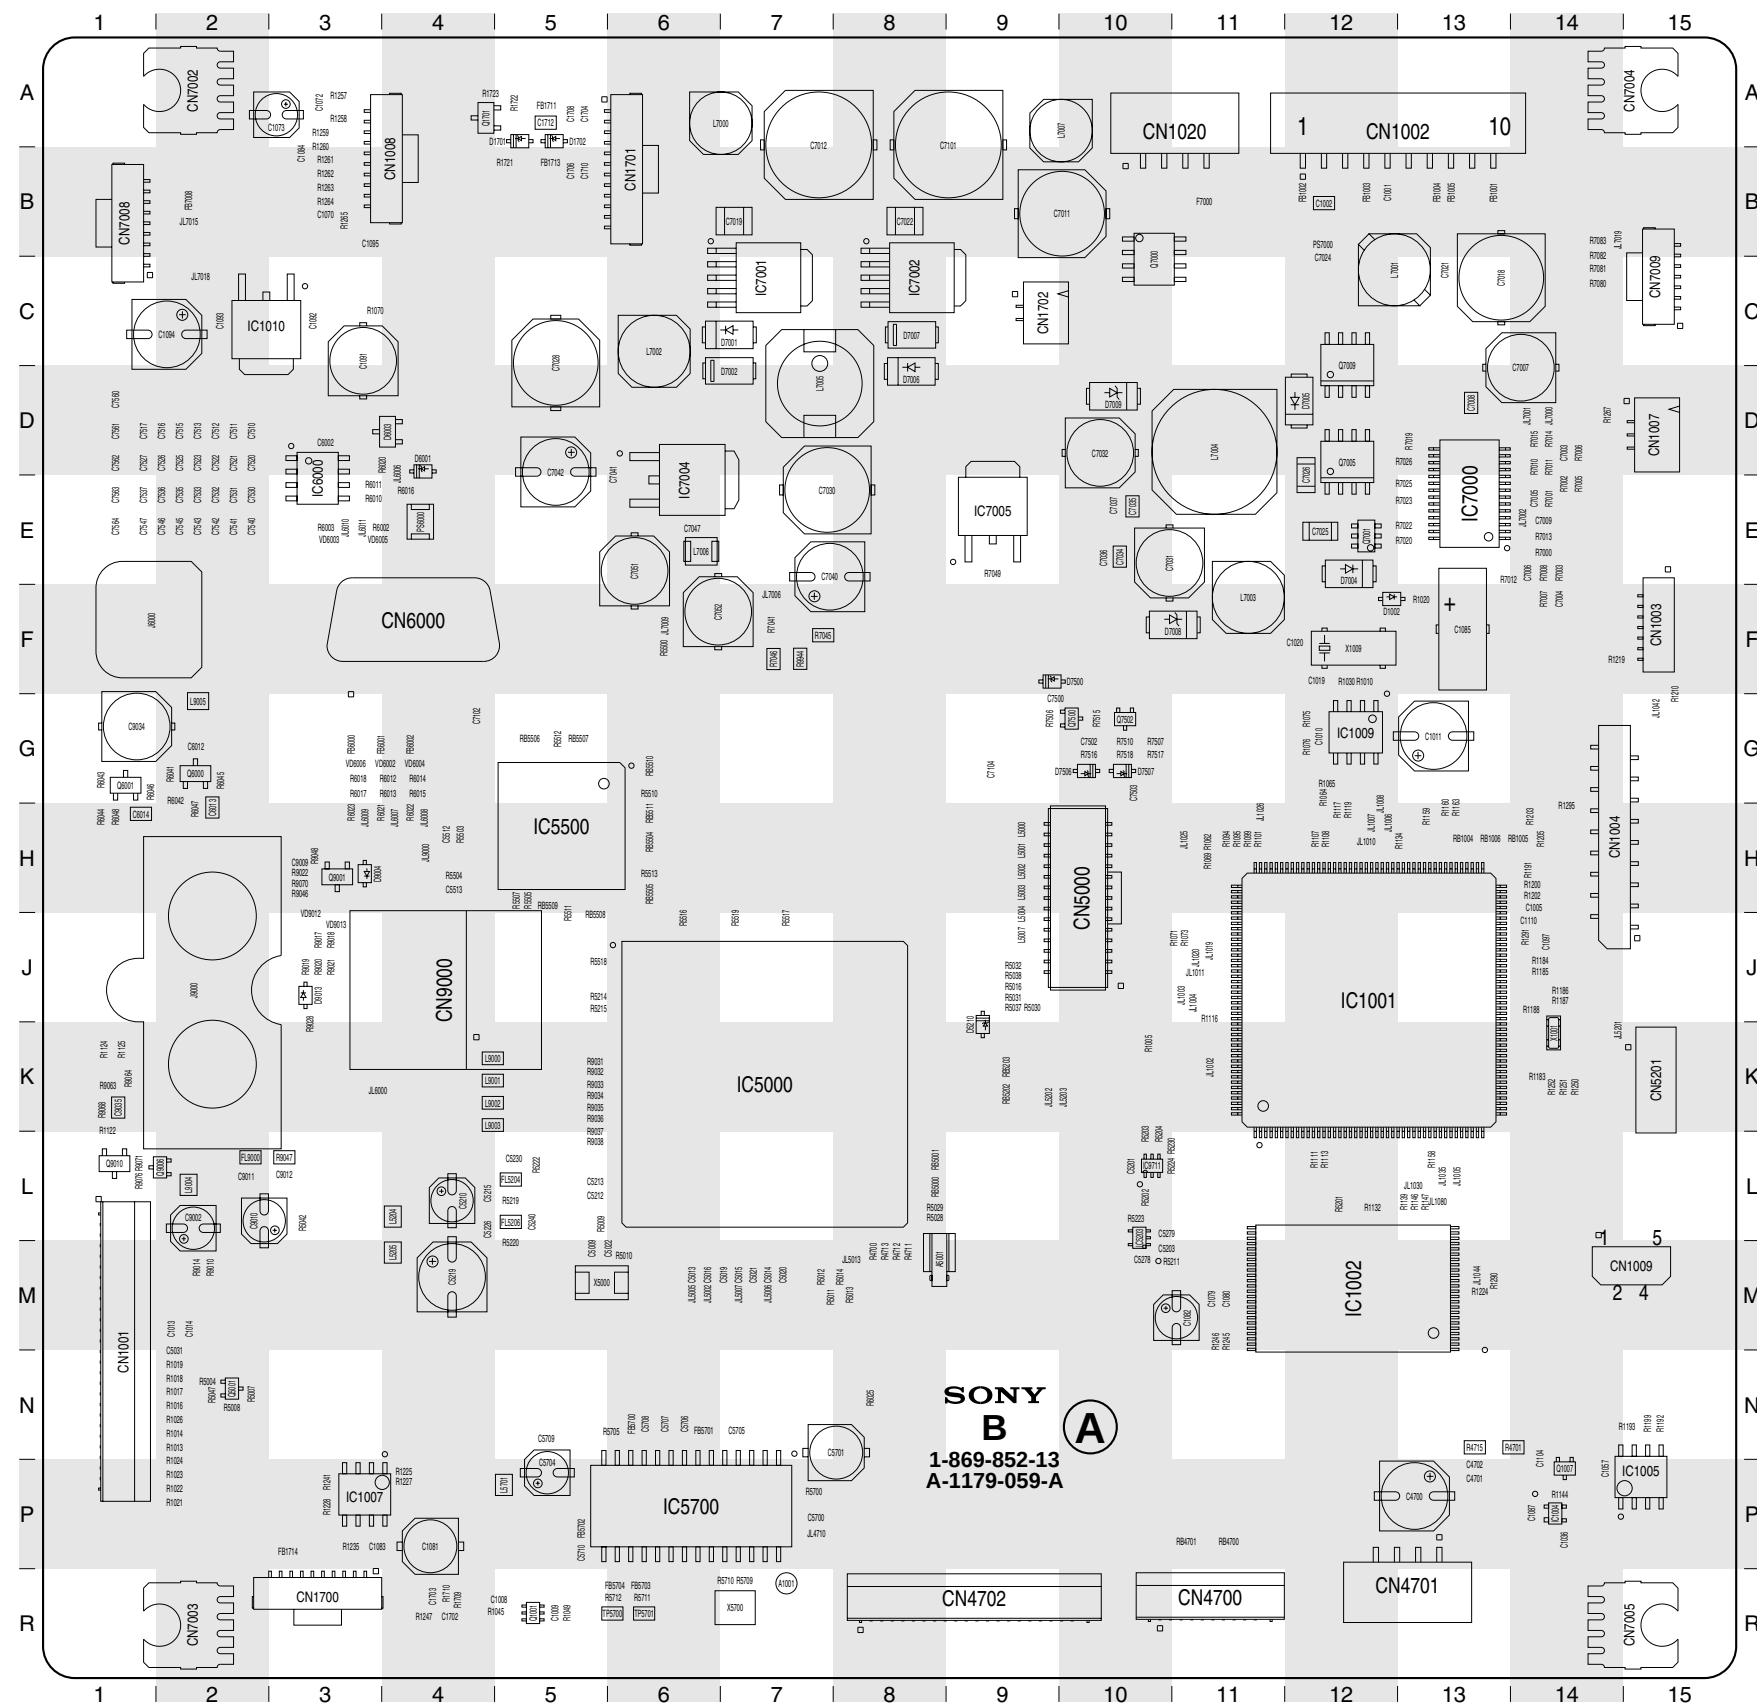


<COMPONENT SIDE>

B BOARD (B)

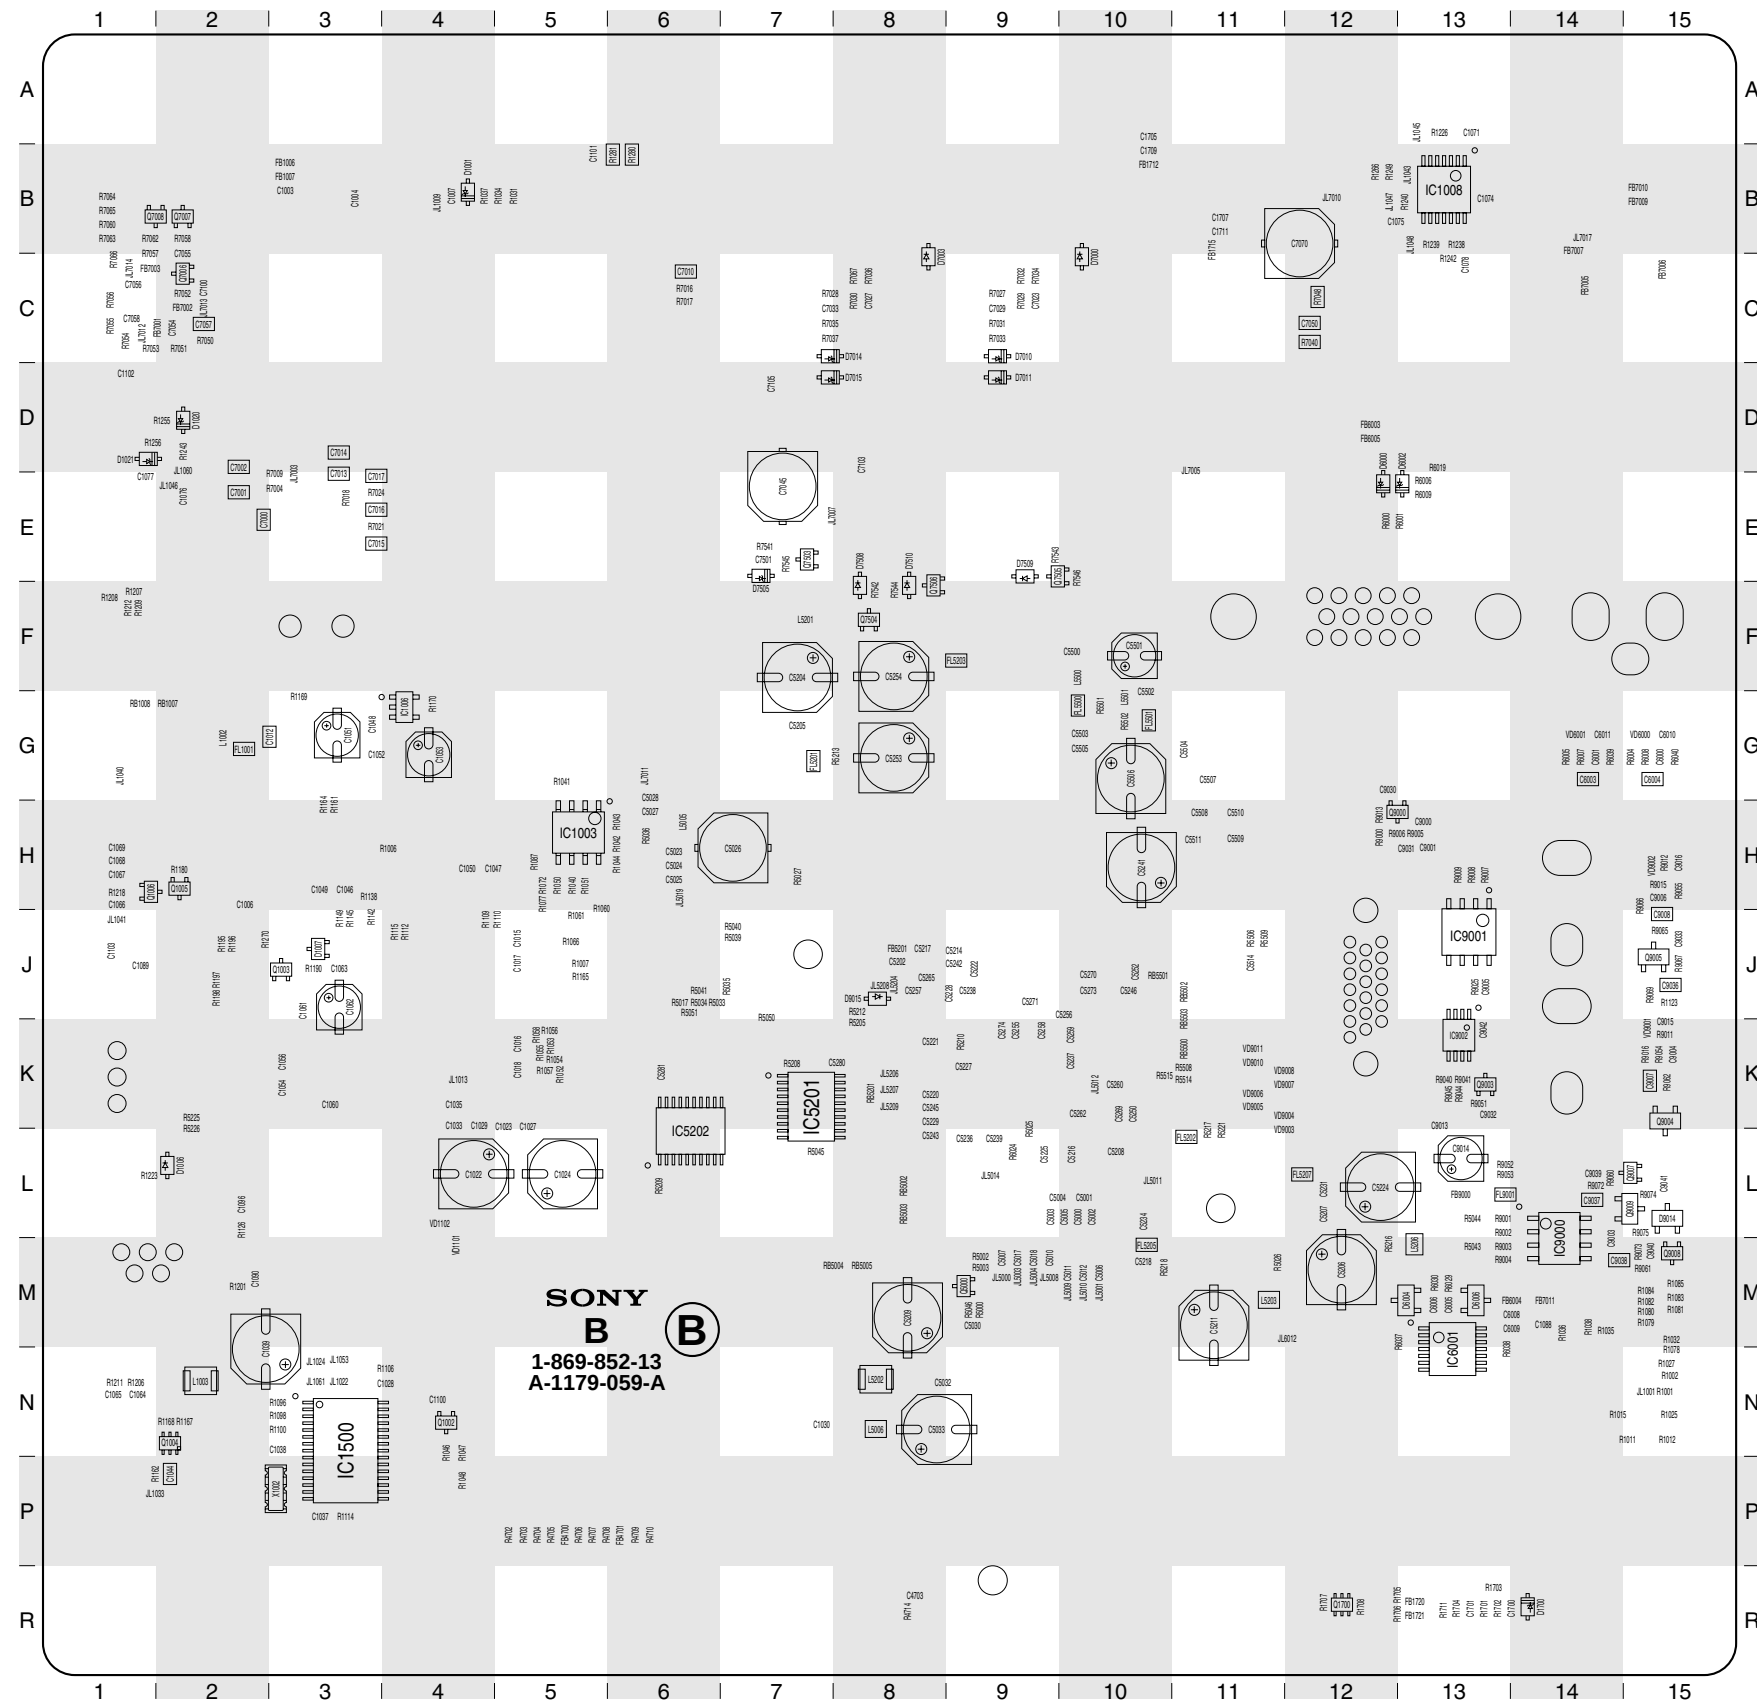


<CONDUCTOR SIDE>

A horizontal number line with 15 tick marks labeled 1 through 15. The line is a solid black horizontal bar. Above the bar, there are 15 vertical tick marks, each centered under a number from 1 to 15. The numbers are placed directly above their respective tick marks.

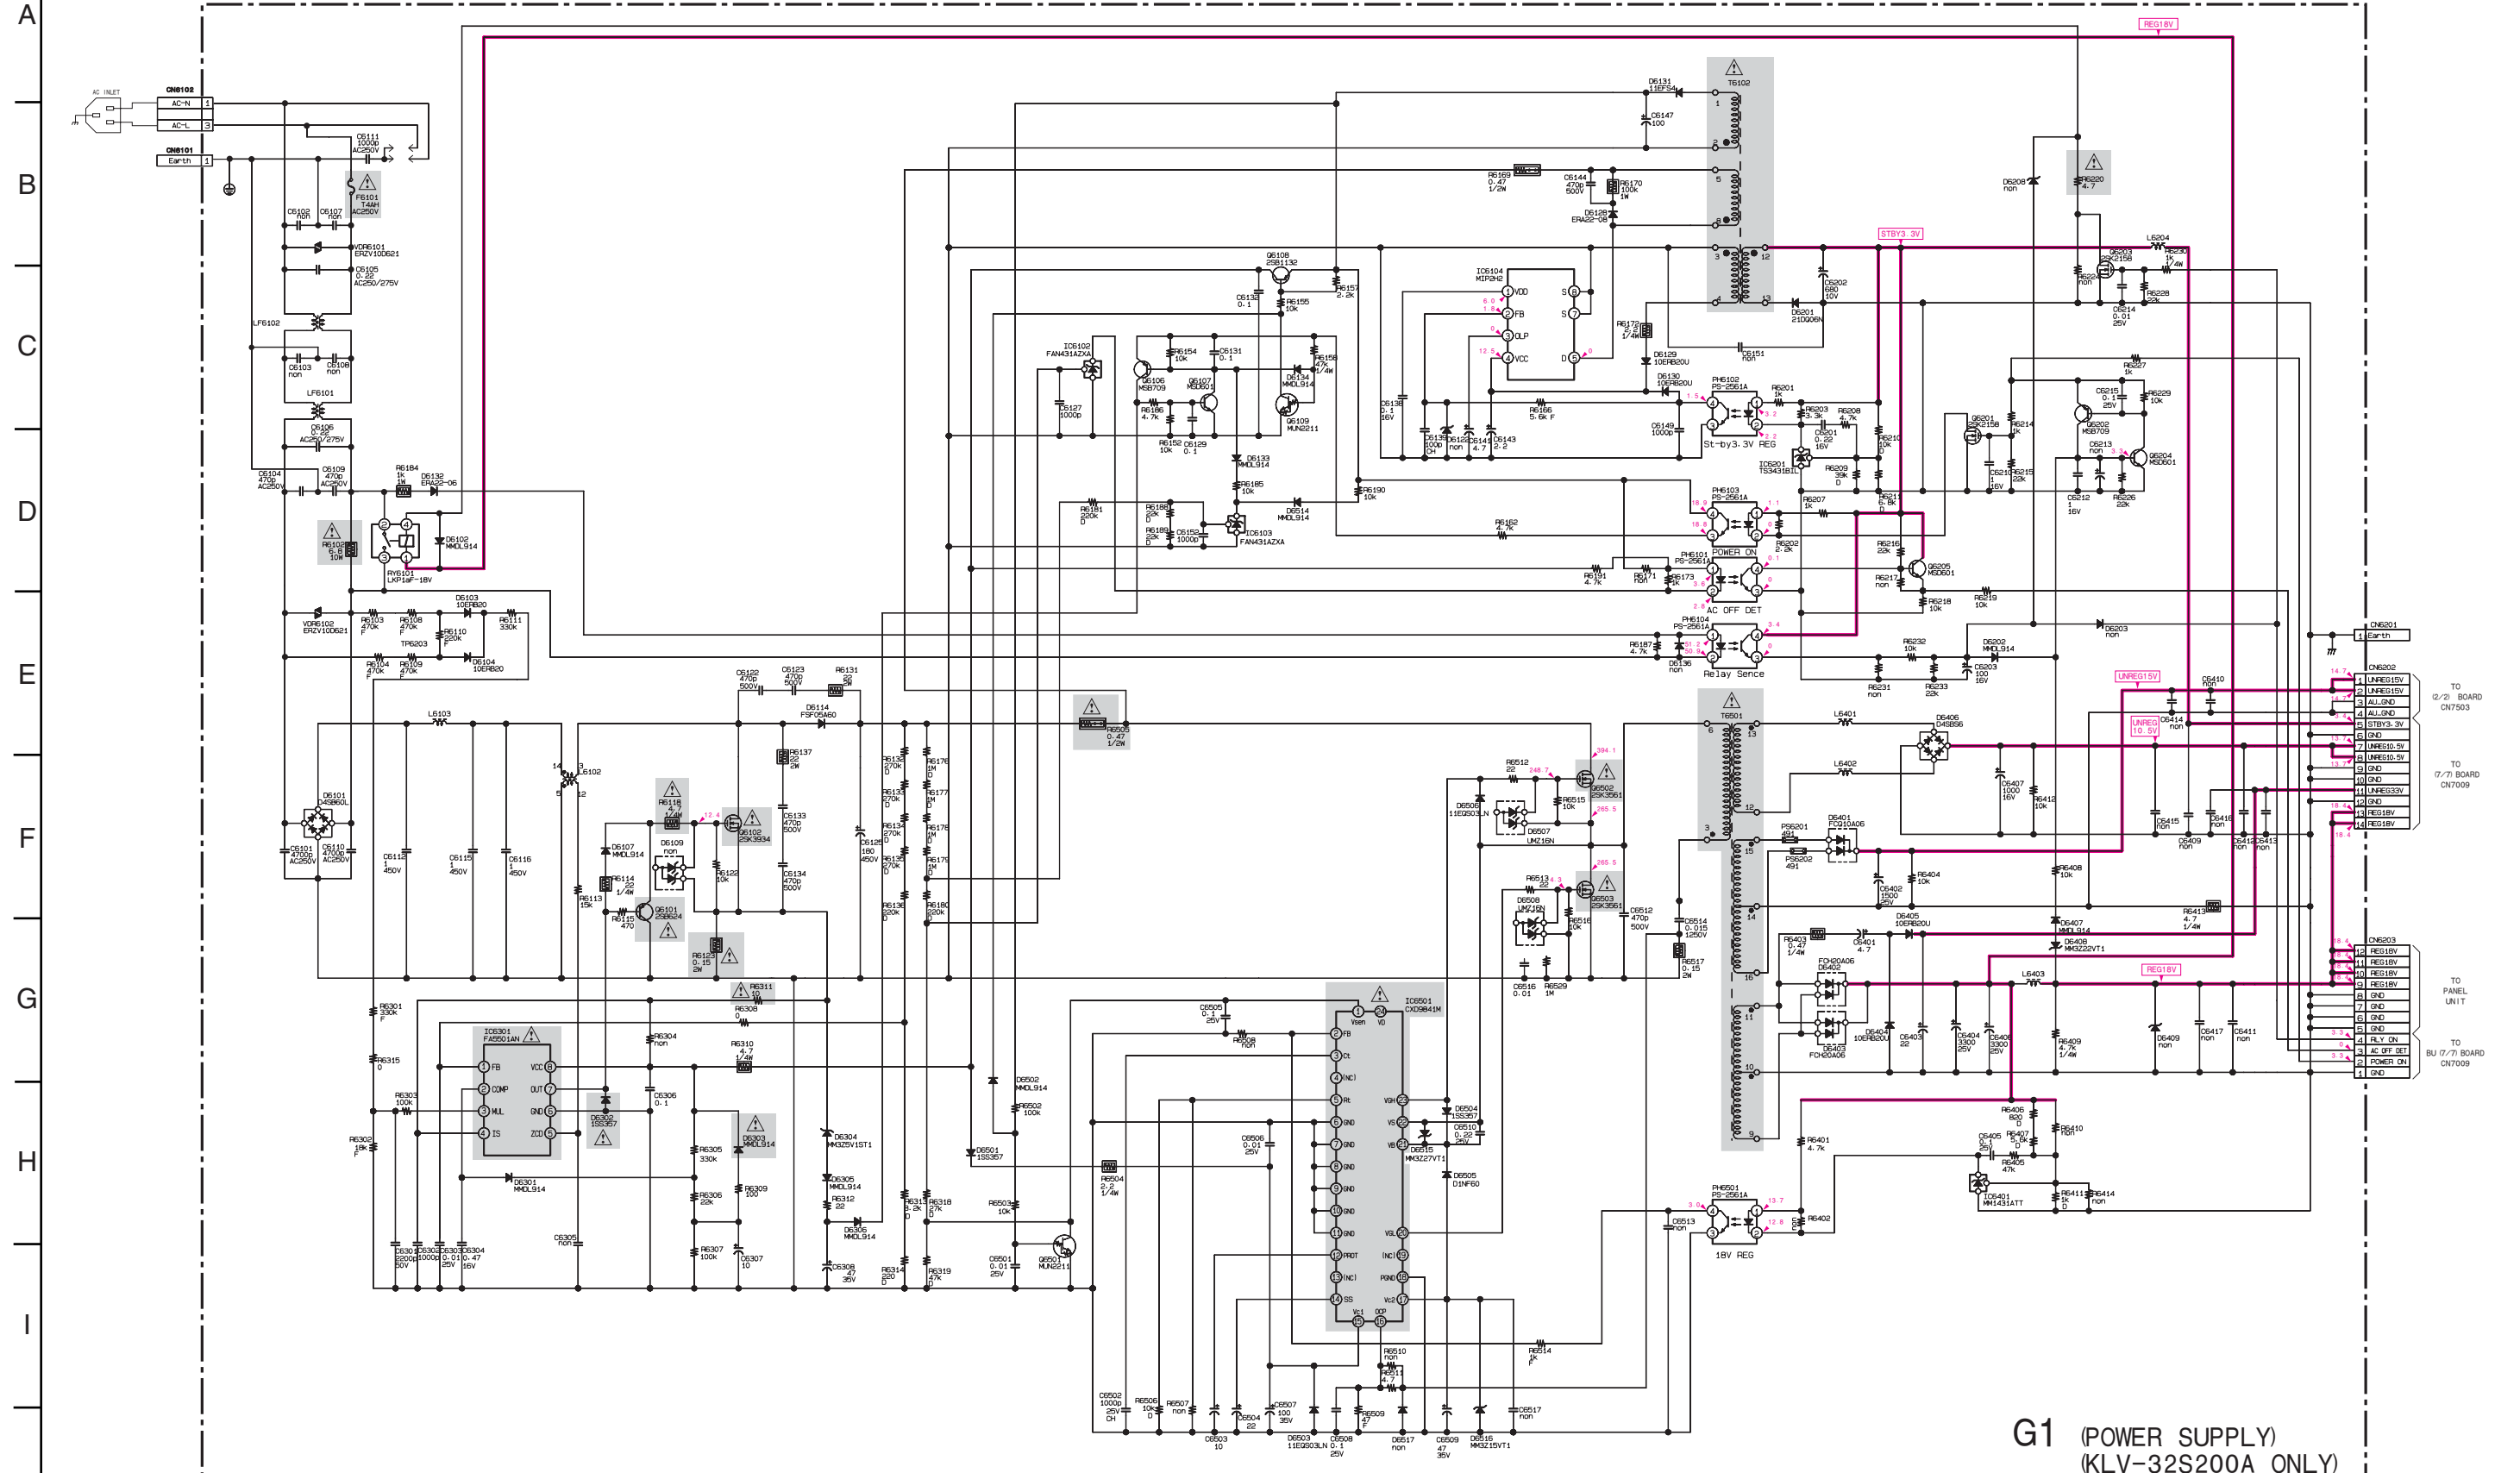


B-SS13354<WB. >-G1

(4) G2A Board (KDL-40/46V2000)

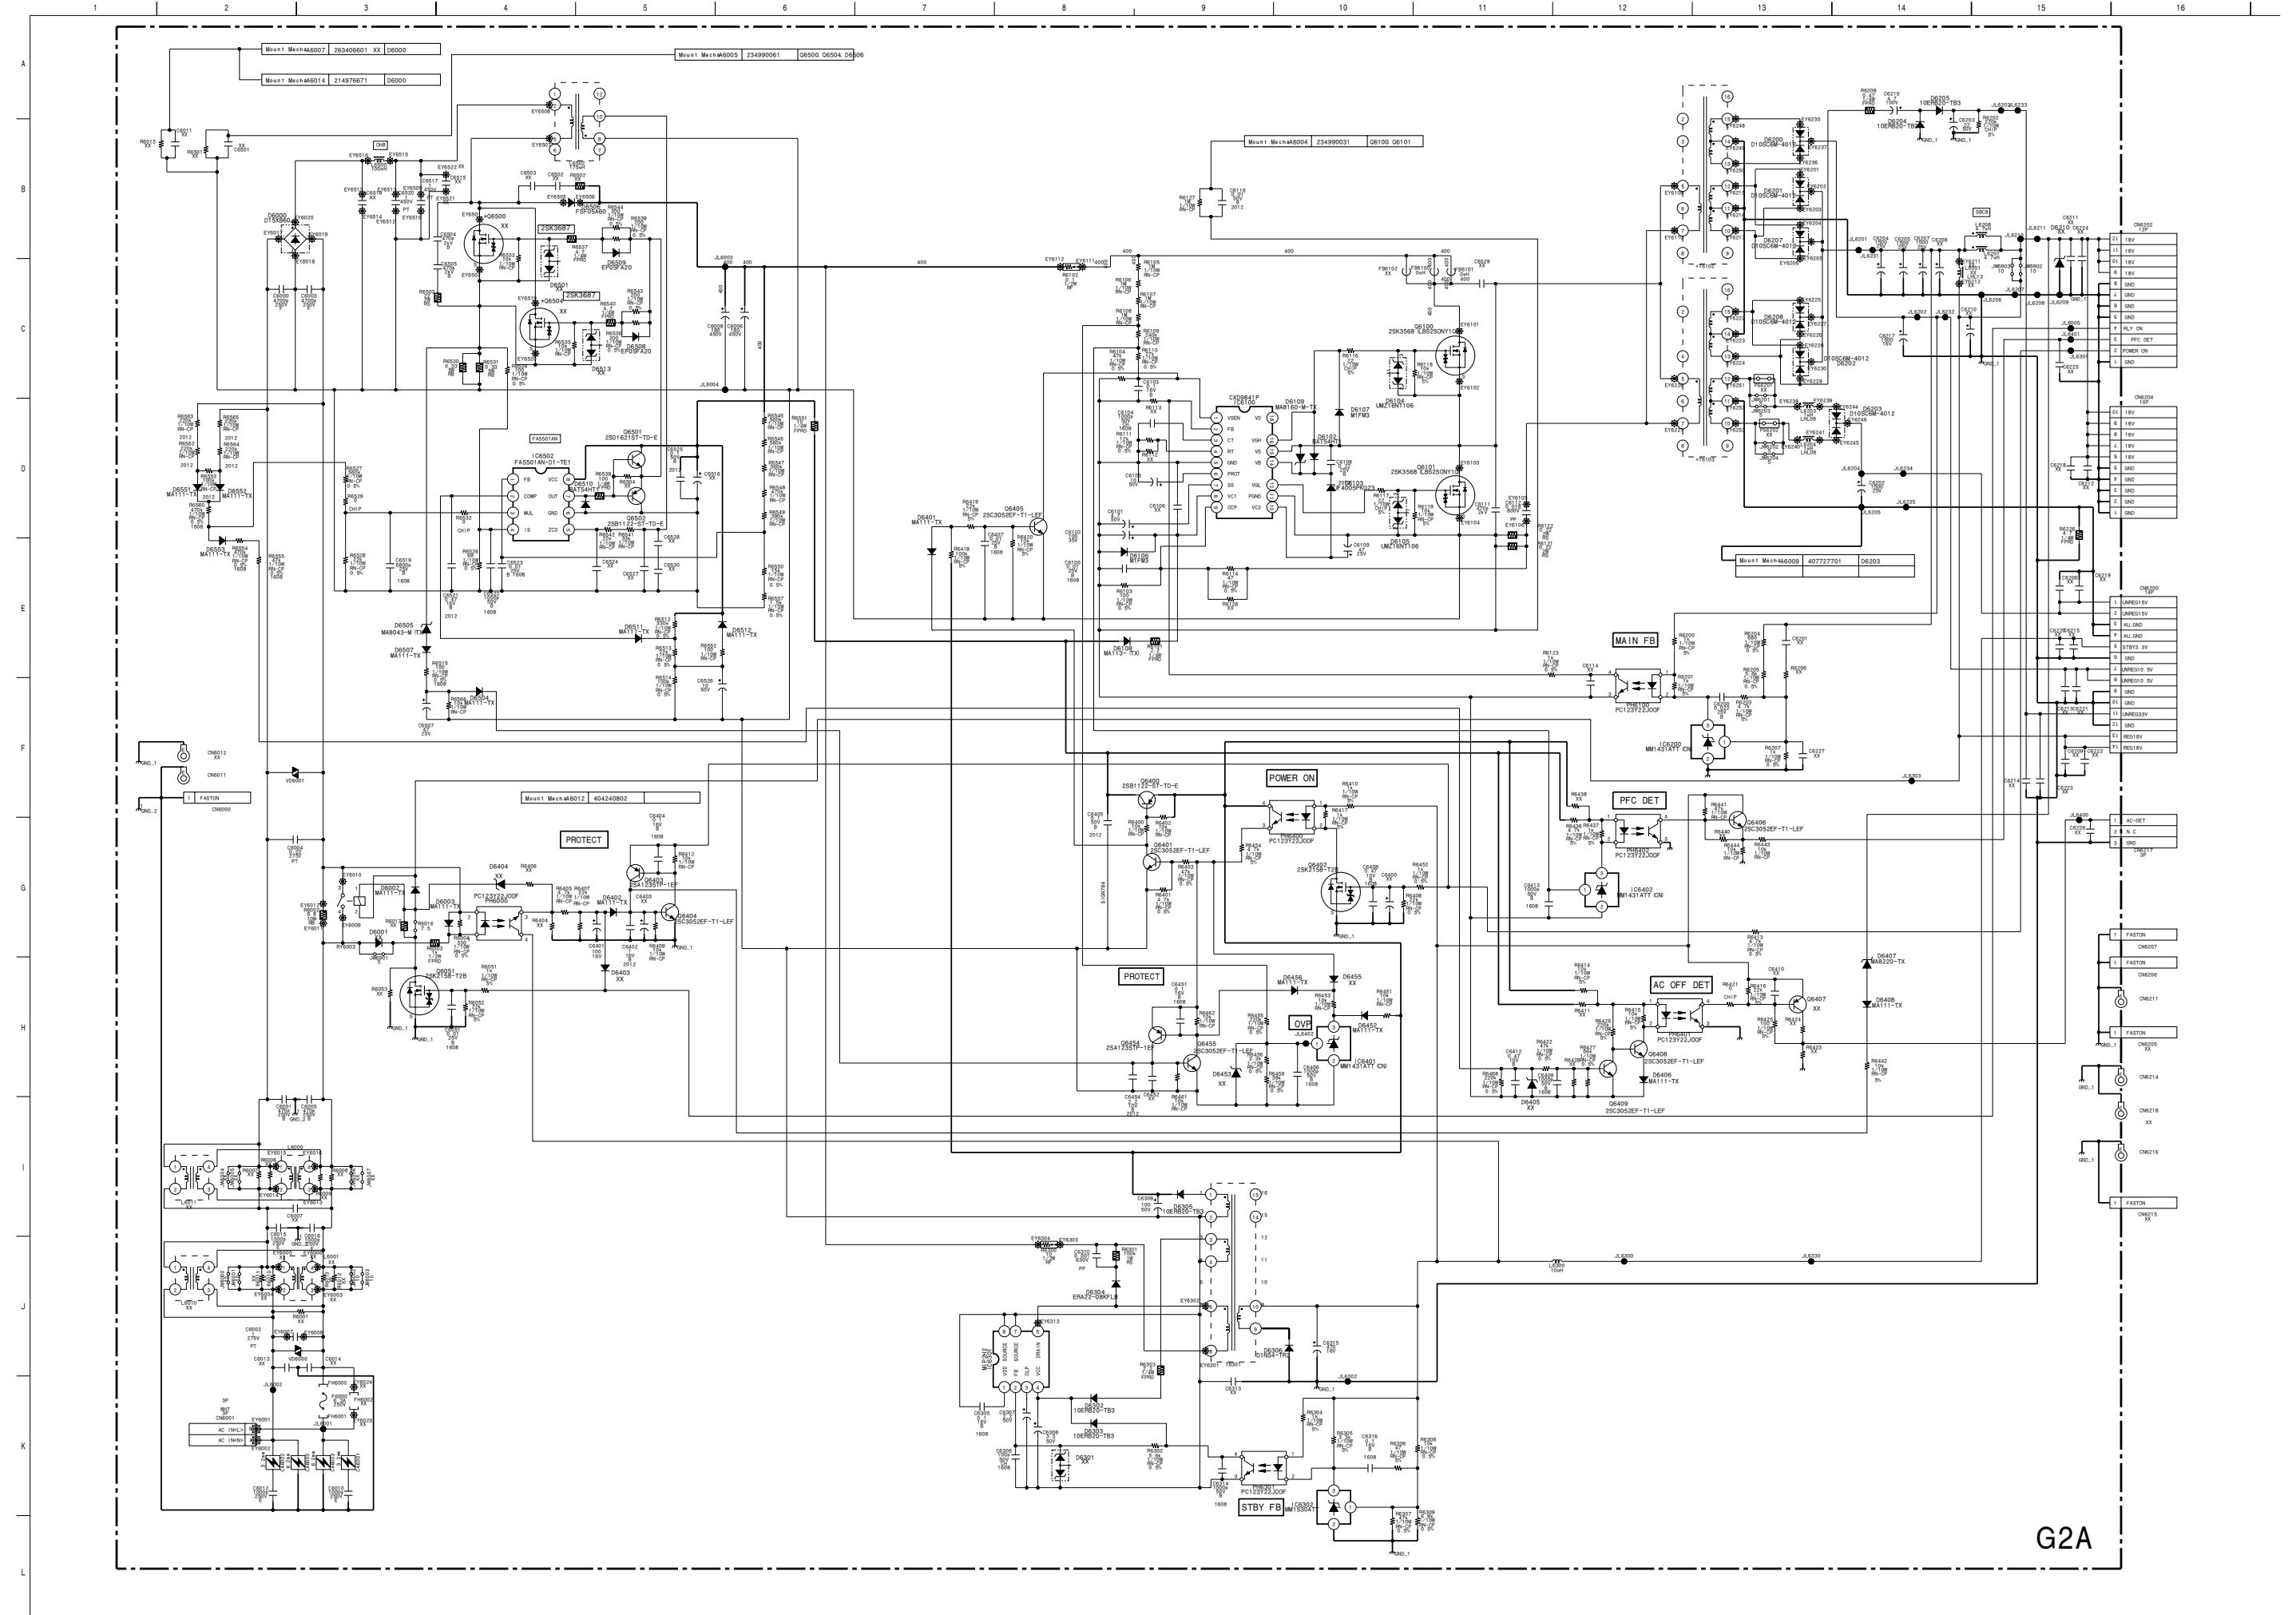


G2A

G2A BOARD

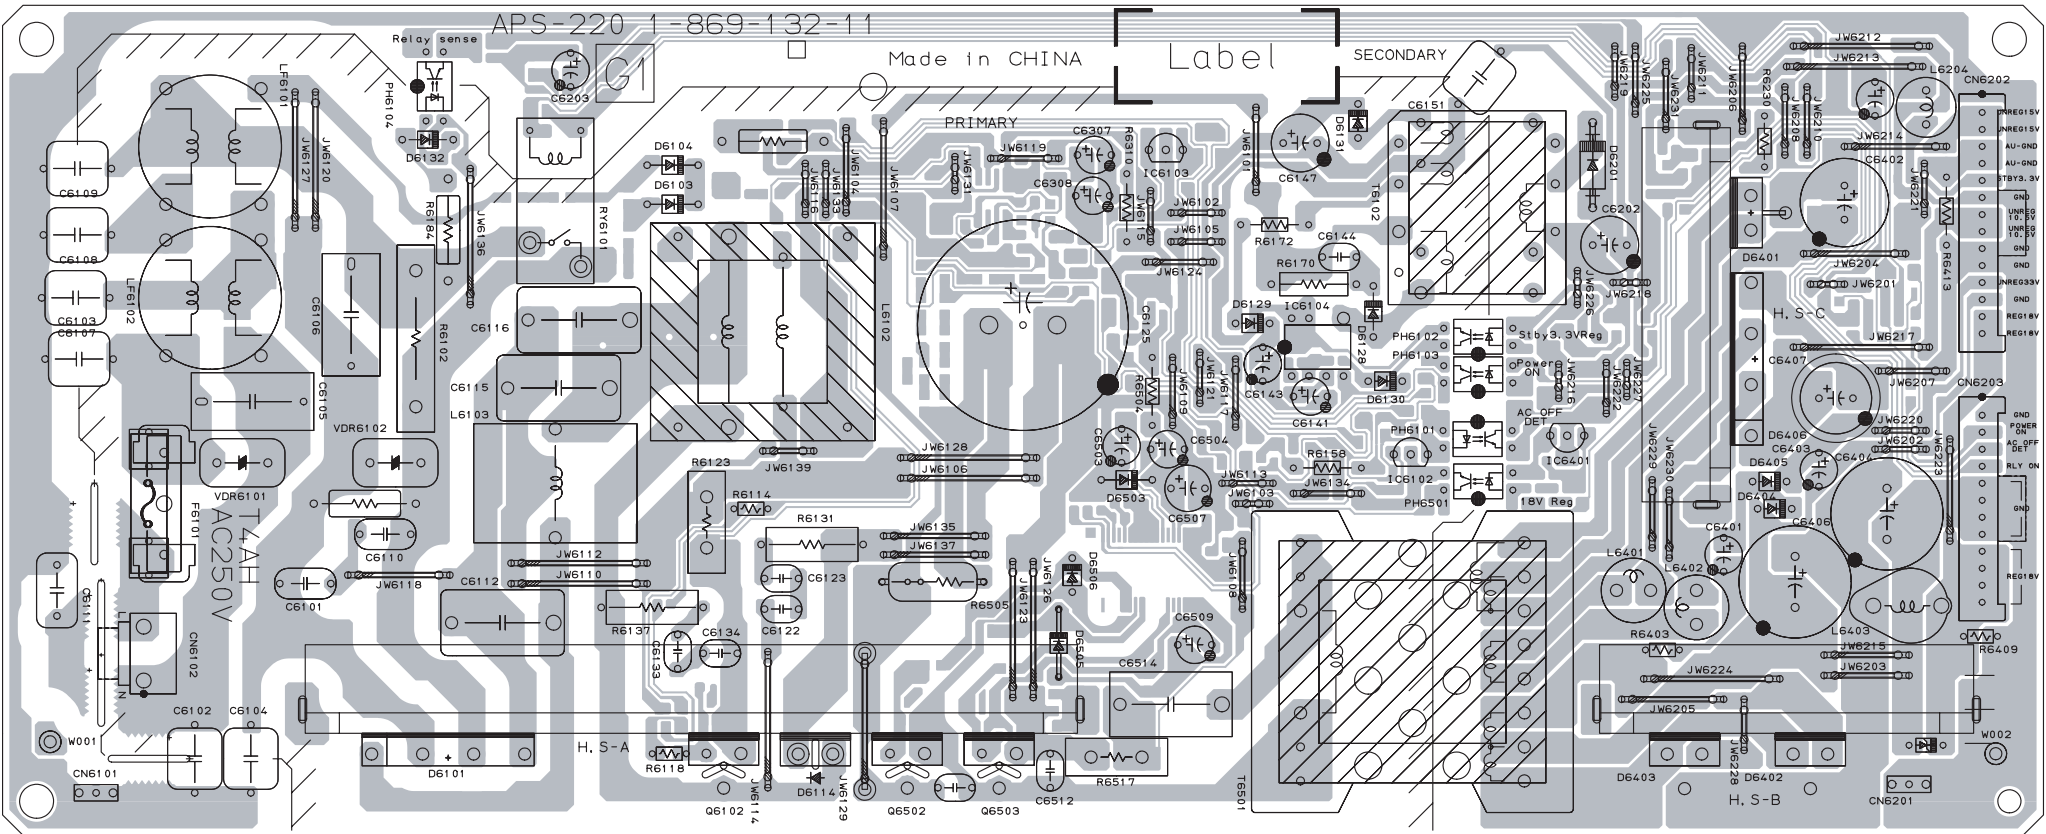

<COMPONENT SIDE>

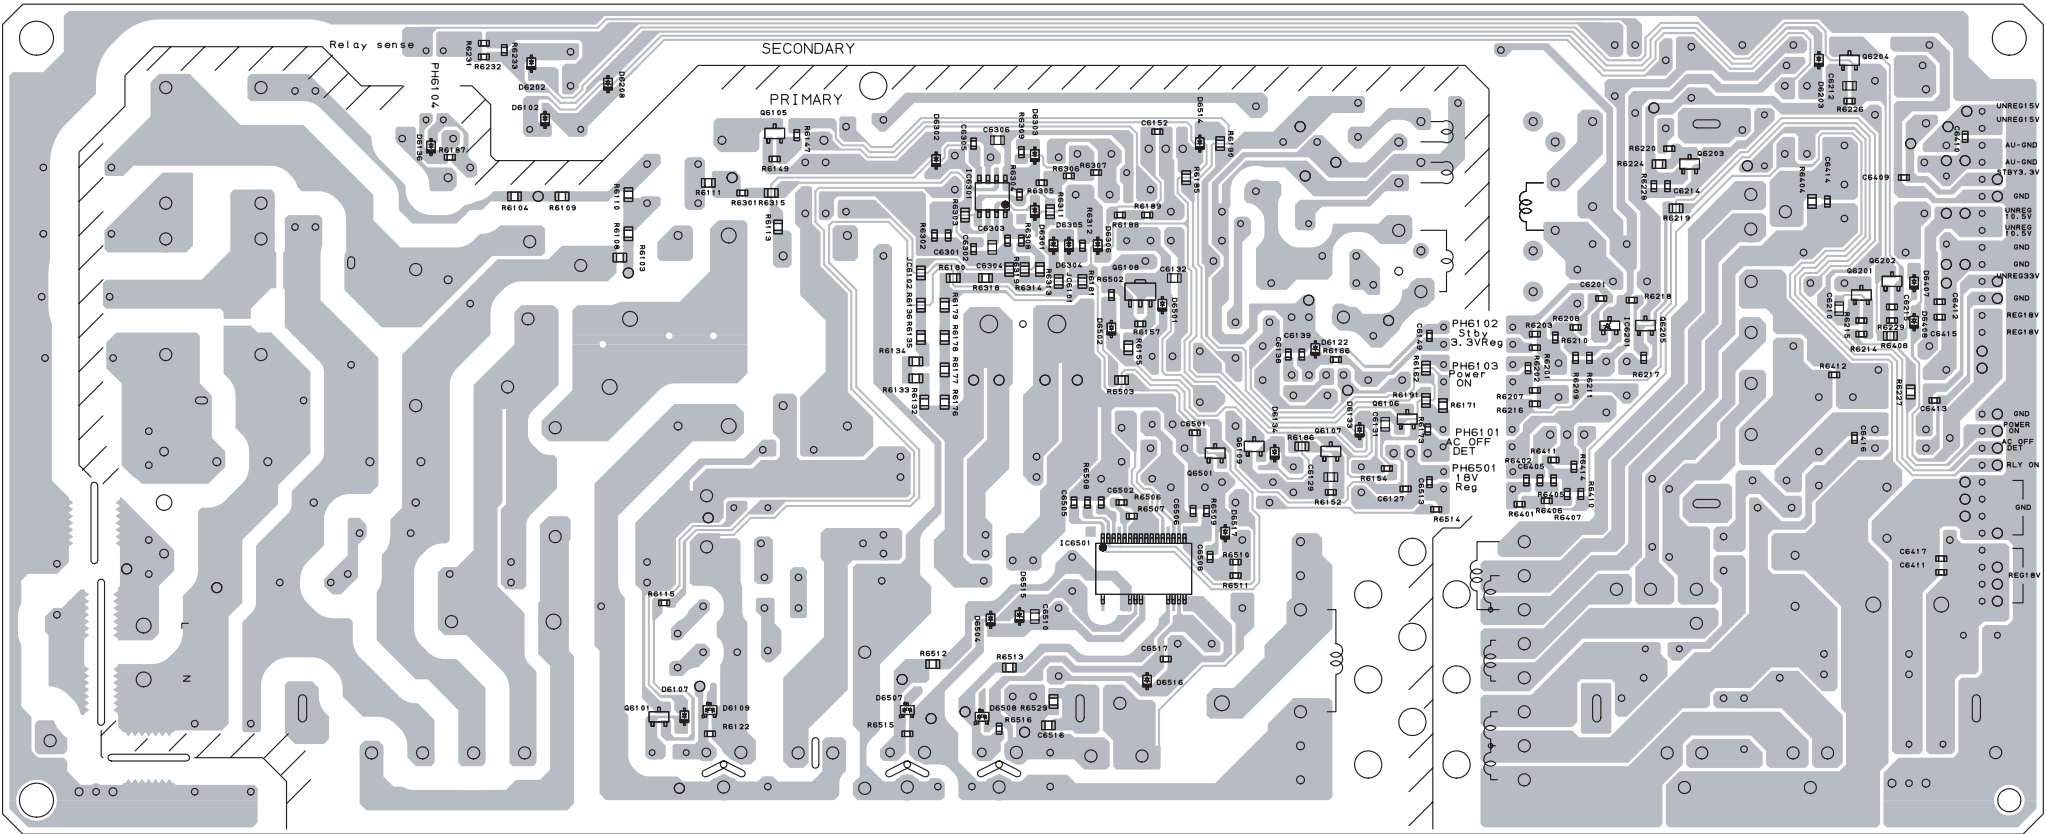



<CONDUCTOR SIDE>

G2A BOARD SEMICONDUCTOR LOCATION

IC						
(Component Side)		(Conductor Side)				
IC6100	C-4	-		D6105	A-5	B-3 ⑩
IC6200	A-4	-		D6106		C-3 ③
IC6301	D-5	-		D6107		C-4 ③
IC6302	E-6	-		D6108		C-4 ③
IC6401	A-3	-		D6109		C-4 ③
IC6402	A-4	-		D6200		-
IC6502	A-6	-		D6201	A-7	-
				D6202	B-6	-
				D6203	D-6	-
				D6204	D-7	-
				D6205	D-7	-
				D6207	A-6	-
				D6208	B-7	-
				D6210		B-1 ③
				D6301		D-3 ⑩
				D6302	D-5	-
				D6303	D-5	-
				D6304	D-5	-
				D6305	E-5	-
				D6306	E-5	-
				D6401		B-5 ③
				D6402		E-3 ③
				D6403		E-2 ③
				D6404		E-3 ③
				D6405		B-4 ③
				D6406		A-4 ③
				D6407		E-2 ③
				D6408		E-2 ③
				D6452		A-4 ③
				D6453		B-4 ③
				D6455		A-5 ③
				D6456		A-5 ③
				D6501		B-6 ③
				D6504		A-6 ③
				D6505		A-6 ③
				D6506	B-2	-
				D6507		A-6 ③
				D6508		B-6 ③
				D6509		B-7 ③
				D6510		A-6 ③
				D6511		A-6 ③
				D6512		A-6 ③
				D6513		B-6 ③
				D6551		D-7 ③
				D6552		D-7 ③
				D6553		A-7 ③
TRANSISTOR						
(Component Side)		(Conductor Side)		*		
Q6051		E-2	①			
Q6100	B-4	-	-			
Q6101	B-5	-	-			
Q6400		A-5	②			
Q6401		A-5	①			
Q6402		A-5	①			
Q6403		E-4	①			
Q6404		E-3	①			
Q6405		B-5	①			
Q6406		A-4	①			
Q6407		A-4	①			
Q6408		A-4	①			
Q6409		A-4	①			
Q6454		A-5	①			
Q6455		A-5	①			
Q6500	B-1	-	-			
Q6501		B-6	②			
Q6502		B-6	②			
Q6504	B-2	-	-			
DIODE						
(Component Side)		(Conductor Side)		*		
D6000	D-2	-	-			
D6001	D-4	-	-			
D6002		E-4	③			
D6003		E-4	③			
D6102		C-4	③			
D6103	C-5	-	-			
D6104	B-4	-	⑩			

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 2-8)


(5) H1 and H4 Boards

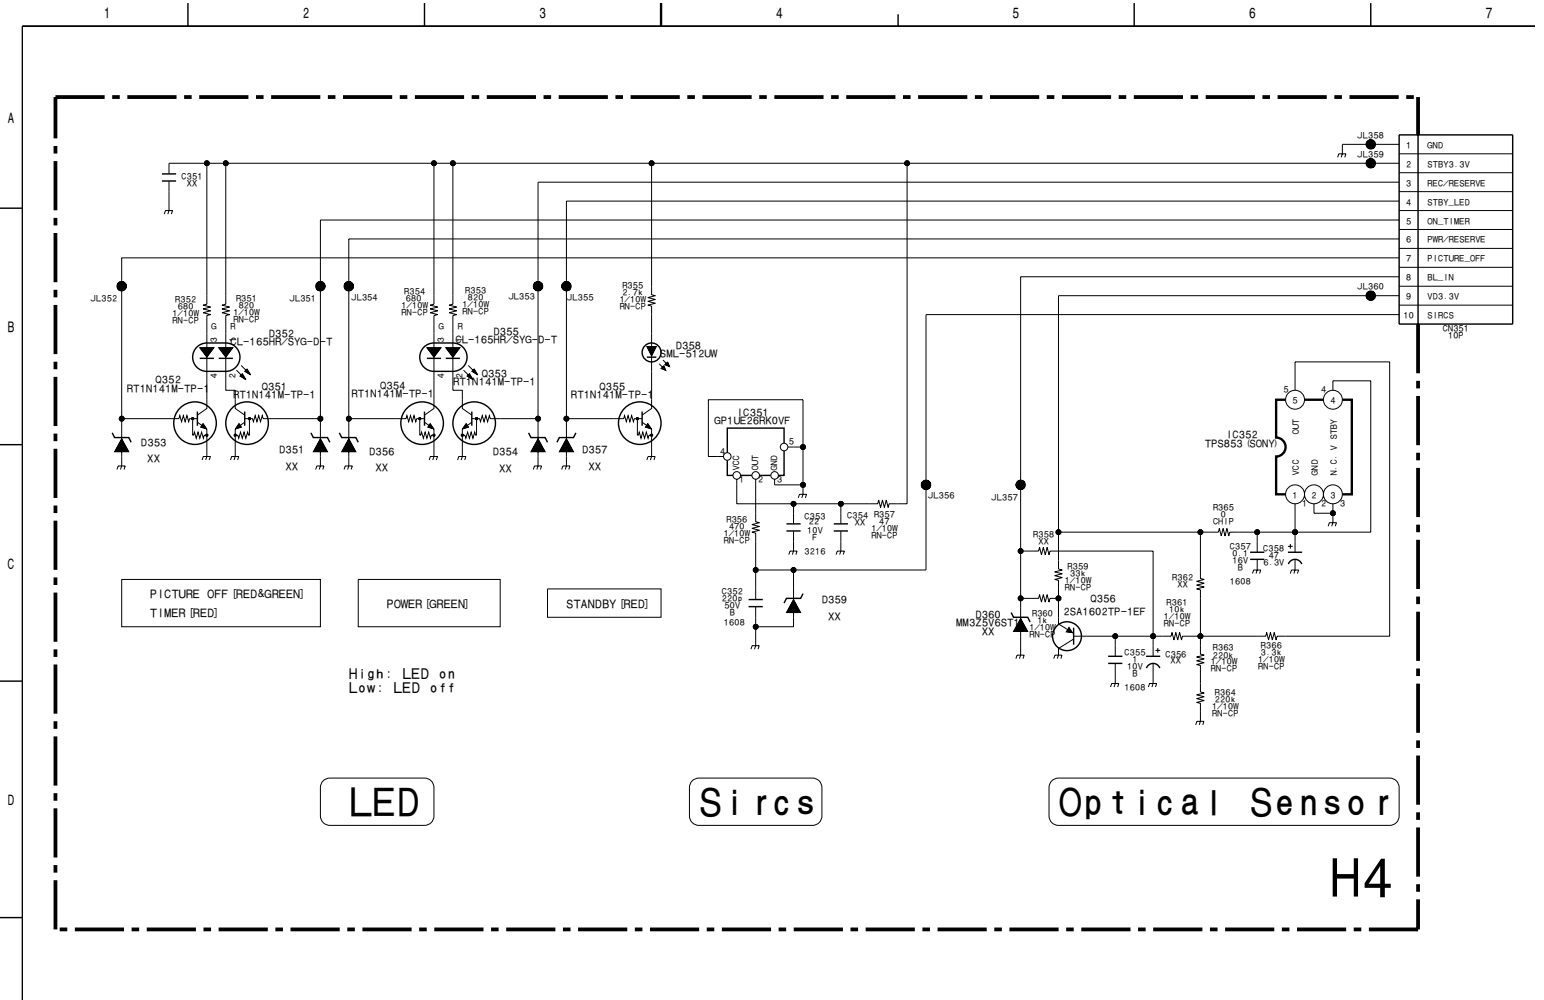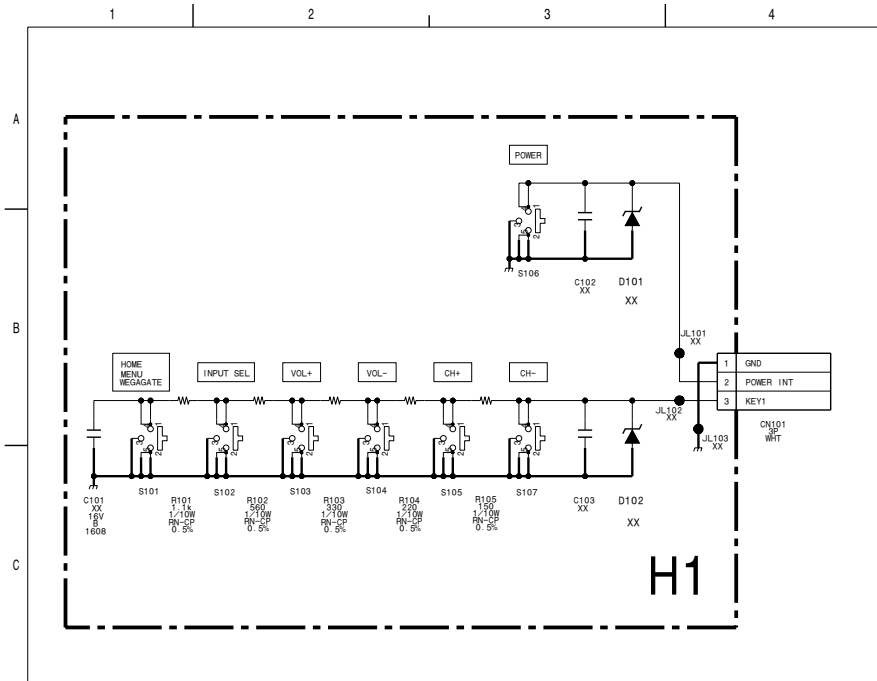

H1


— H1 BOARD —

H1 BOARD (A)

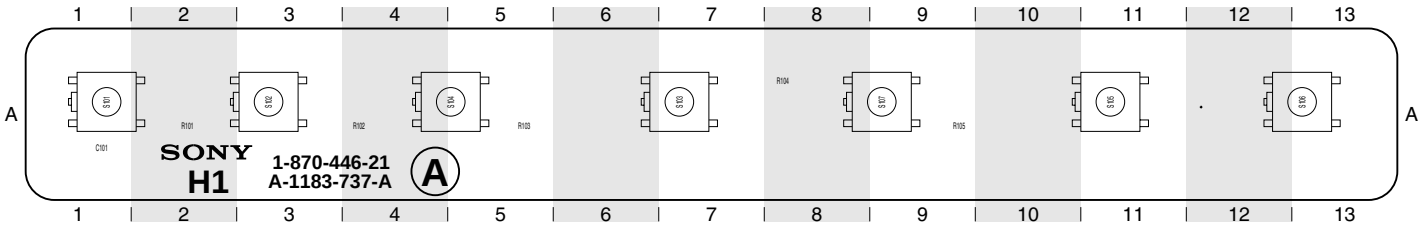

<COMPONENT SIDE>

H1 BOARD (B)

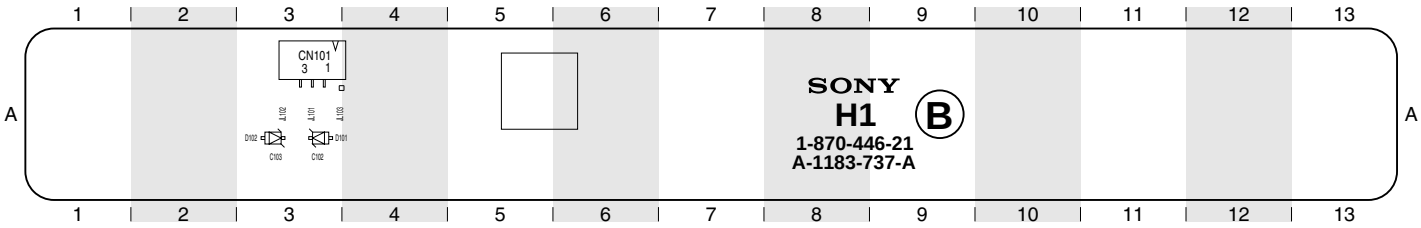


<CONDUCTOR SIDE>

H4


— H4 BOARD —

H4 BOARD (A)

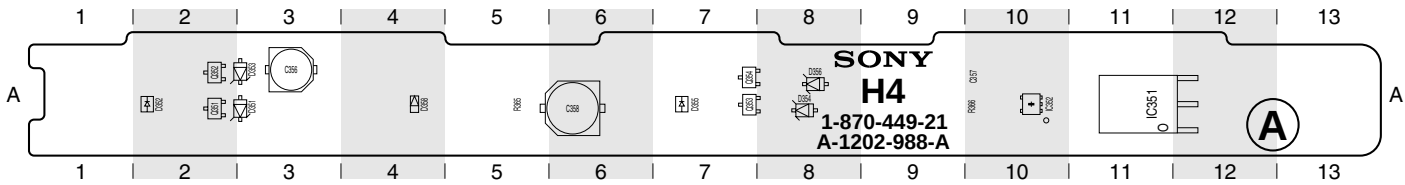



<COMPONENT SIDE>

H4 BOARD (B)

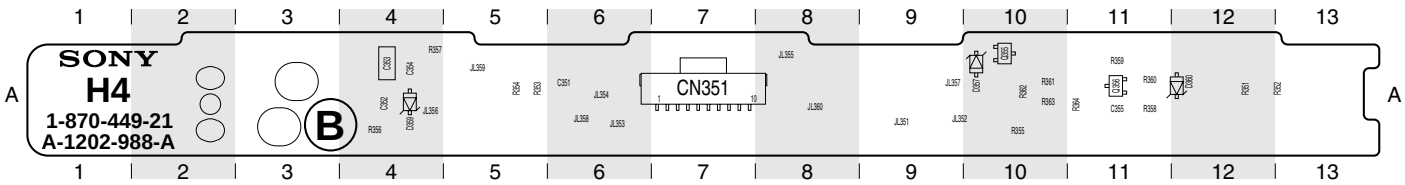


<CONDUCTOR SIDE>


(6) H2 and H46 Boards

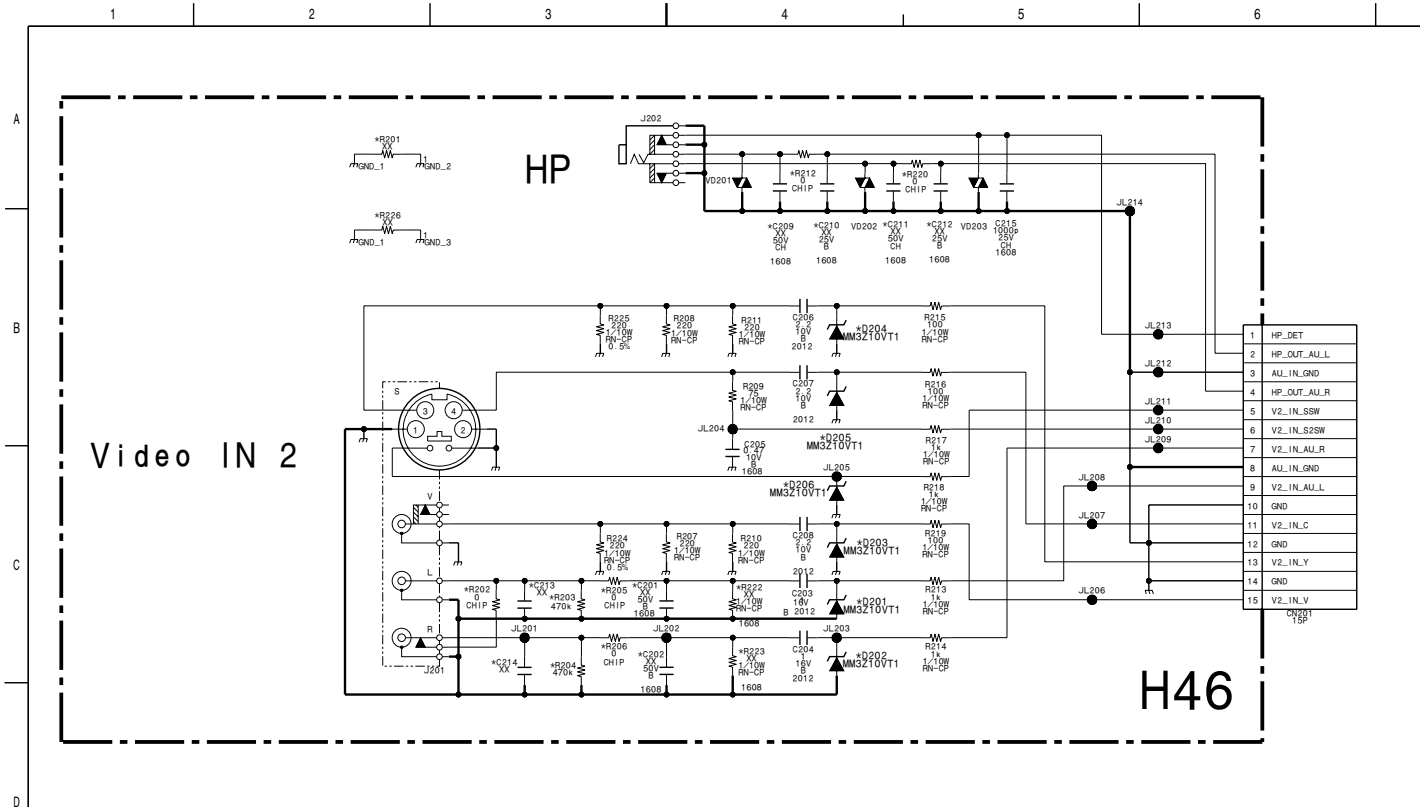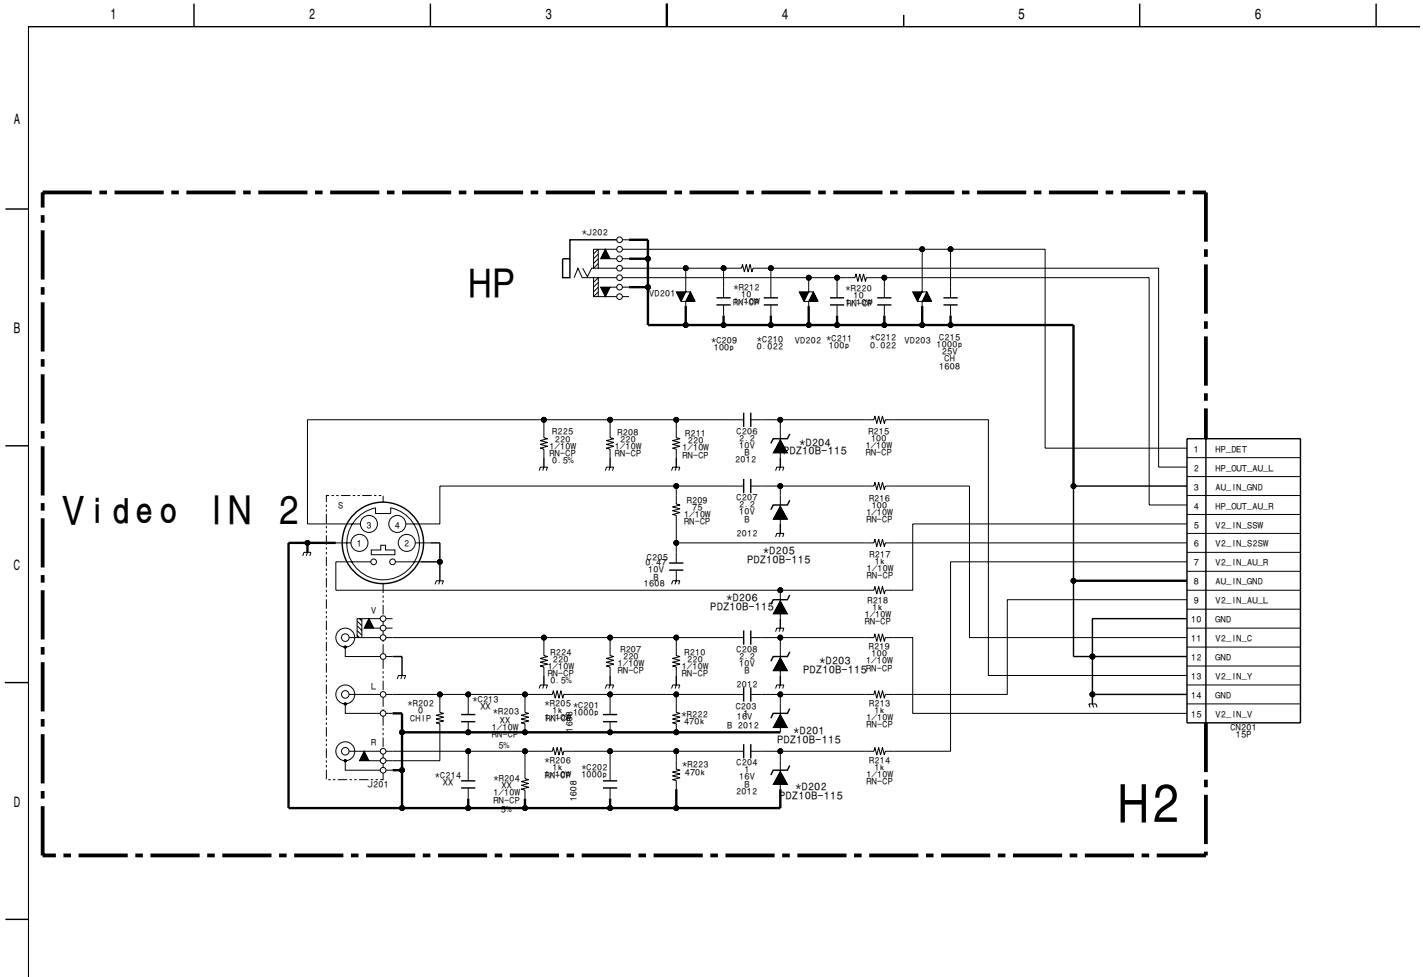


(7) TUG and J Board

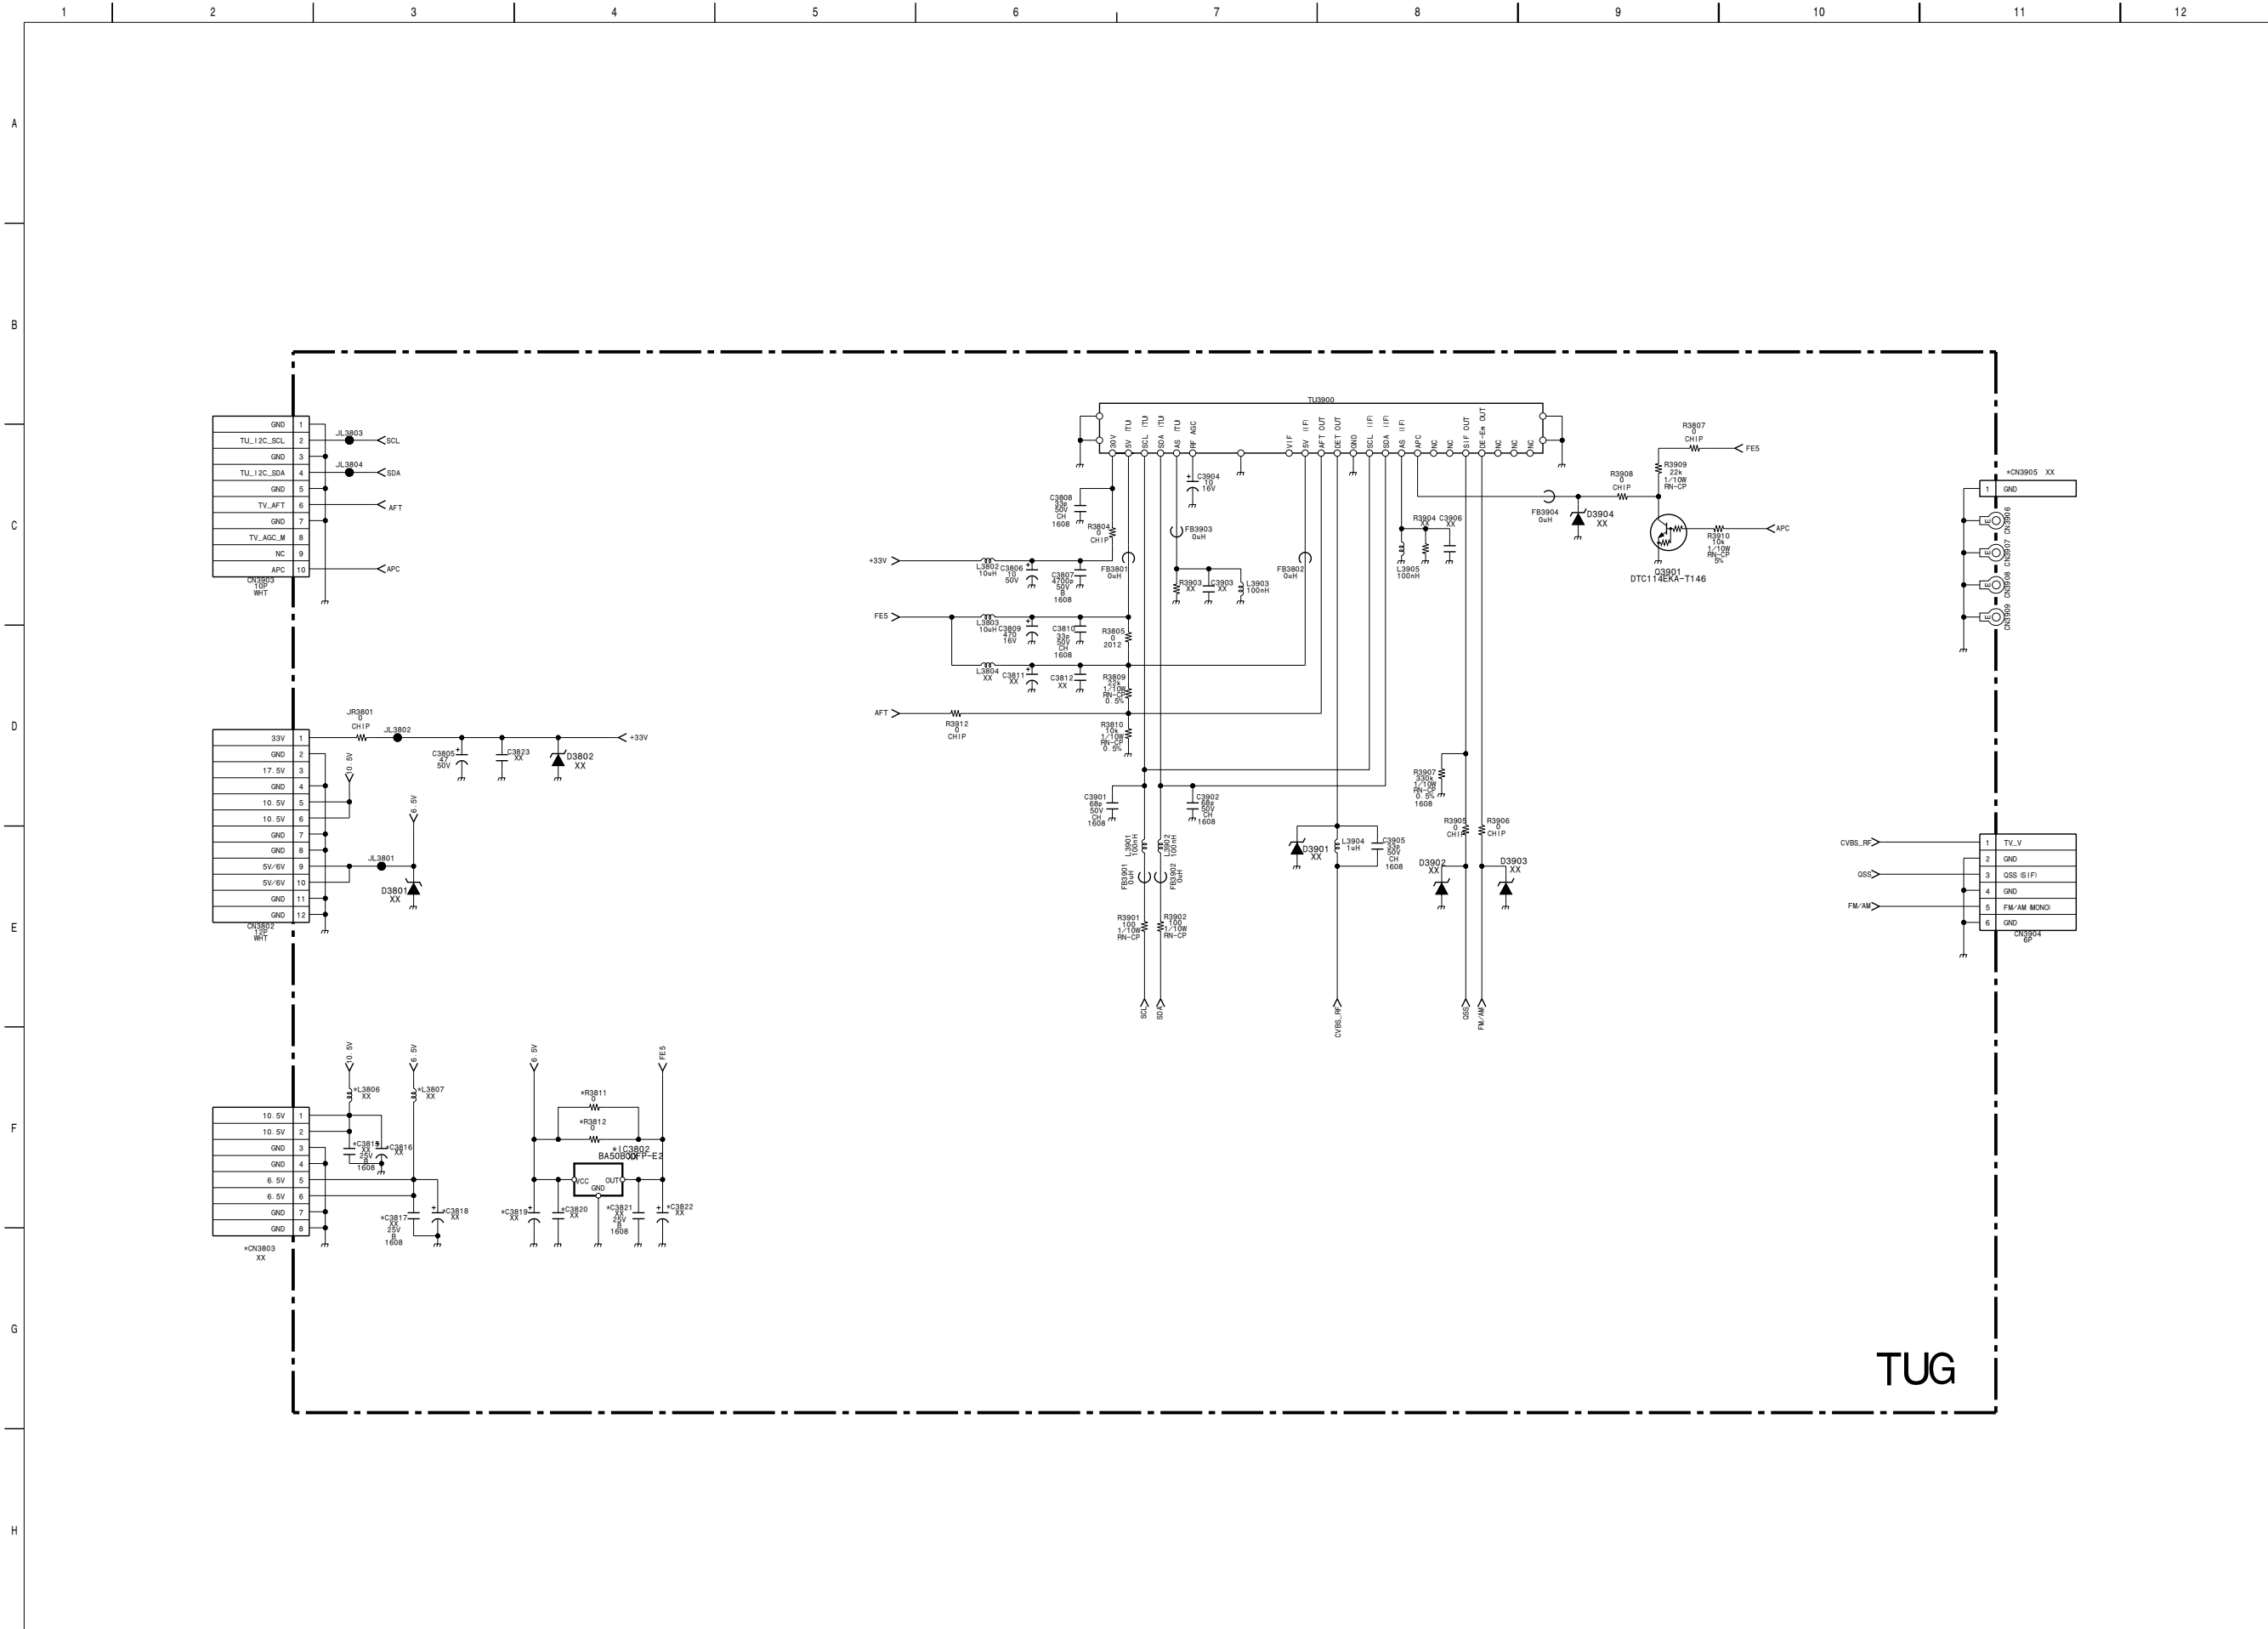

TUG BOARD

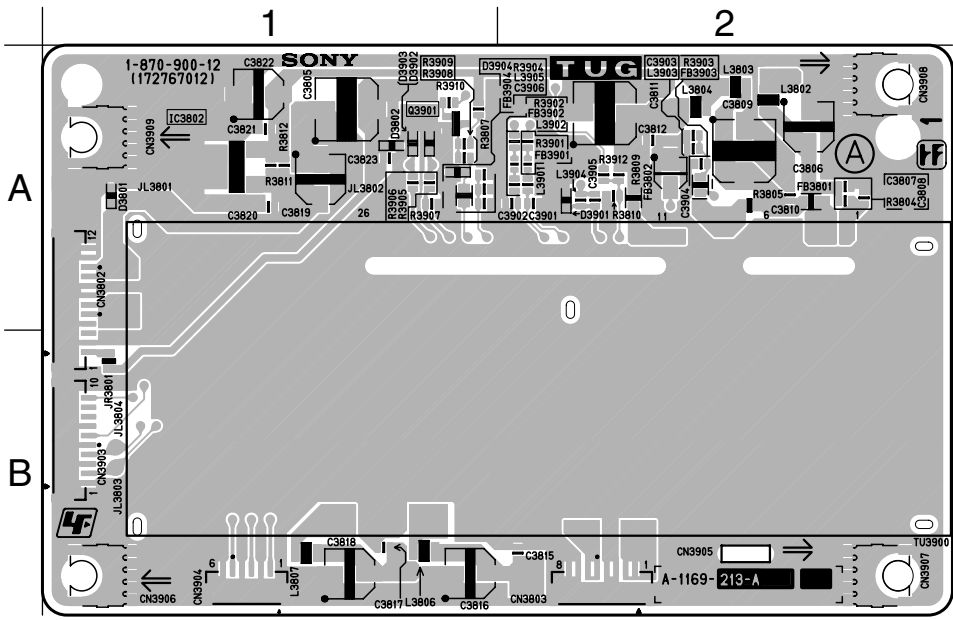

<COMPONENT SIDE>

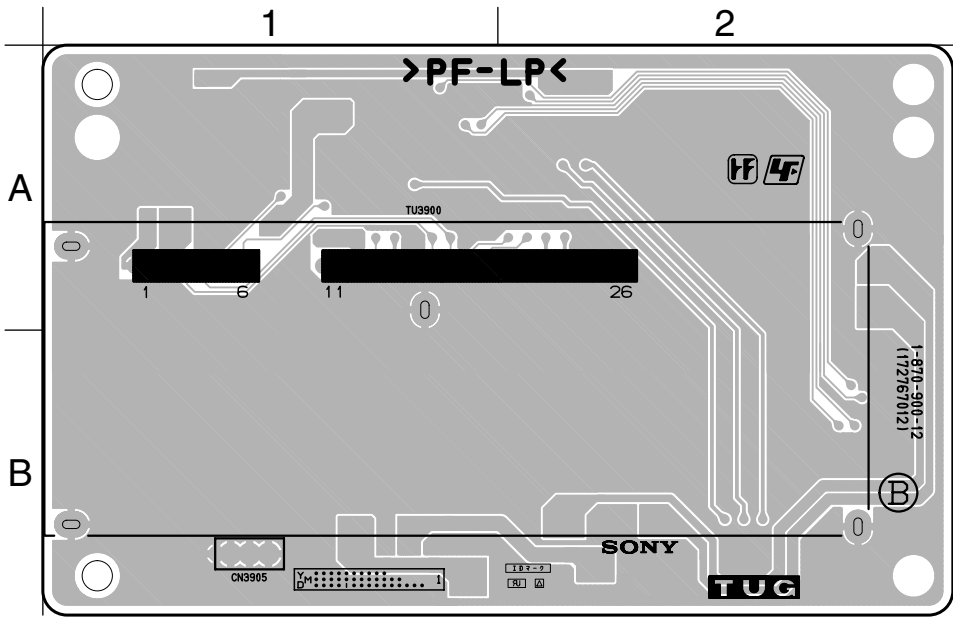

<CONDUCTOR SIDE>

TUG BOARD SEMICONDUCTOR LOCATION


IC		
	(Component Side)	(Conductor Side)
IC3802	A-1	-
TRANSISTOR		
	(Component Side)	(Conductor Side)
Q3901	A-1	①
DIODE		
	(Component Side)	(Conductor Side)
D3801	A-1	③
D3802	A-1	③
D3901	A-2	③
D3902	A-1	③
D3903	A-1	③
D3904	A-1	③

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 2-8)


2-5. SEMICONDUCTORS

IC


ADT75ARZ-REEL
BR24L02F-WE2
CS4335-KSZR
FA5501AN-D1-TE1
LM75BIMX-3/NOPB
M24256-BWMN6TP(A)
M24C02-WMN6T(B)
MIP2H2
MM1662FTRE
NJM3414AV(TE2)
NJM4558V-TE2
PCA9517DP.118
S-35390A-J8T1G
SN74LVC14APWR
SN74LVC2G04DCKR
SN74LVC2G34DCKR
TMP75AIDR




BA09FP-E2
MM1431ATT (CN)
MM1530ATT
PST3629UL
S-1132B18-M5T1G
TC7SH86FU(T5RSOYJF)




BA50BC0FP-E2




BD9775FV




CXA2069Q
CXA2069Q-TL




CXD9199GG-D




CXD9841P




EM6A9320BI-5MG




GP1UE26RK0VF




MB91305PMC-G-BNDE1




MM1431ATT




M61571AFP-DF0T




SI8008TM-TL




SN74CBTLV3245APWR




SN74LV132APWR
TC74LCX14FT(EKJ)
TC74LCX14FT(EL)



S29AL016D70TFI010-WAX2AU1




TPS853(SONY)




TRANSISTOR


DTA114TUA-T106
DTC114EUA-T106
DTC115EUA-T10?
STC144EUA-T106
DTC614TUT106
RT1N141M-TP-1
RT1N441M-TP-1
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1235-F
2SA1235TP-1EF
2SA1577-QR
2SA1602-F
2SA1602TP-1EF
2SC1623-L5L6
2SC2412K-T-146-QR
2SC3052EF-T1-LEF
2SC3624A-T1L15L16
2SC4154-F
2SC4154TP-1EF




DTC114EKA-T146
DTC123JUA-T106




FDS6690A
RSS050P03FTB
RSS100N03TB




HN1B01FU-TE85R




RSQ035P03TR




SSM6N16FU




2SB1122-S
2SB1122-ST-TD-E
2SD1621ST-TD-E



2SK1828
2SK1828TE85L
2SK2158-T2B




2SK3568(LBS1SONY.Q)
2SK3797(LBS1SONY.Q)




DIODE

BAT54HT1
DTZ10B
HZU16B2TRF-E
MA111-TX
MA113-(TX)
RD5.6SB-T1
UDZ-TE-17-6.8B
UDZ-TE-17-7.5B




CL-165HR/SYG-D-T



D1NS4
D1NS4-TR2

D026

D10SC6M-4012




D15XB60




D5L60




EP05FA20
MM3Z10VT1
MM3Z11VT1
MM3Z16VST1
MM3Z22VT1
MM3Z4V3ST1
MM3Z6V8ST1




ERA22-08KFLB




FSF05A60




MA8160-M
MA8160-M-TX
MA8220-TX




MMDL914T1




M1FM3
MA8043-M
MA8043-M(TX)
RB501V-40TE-17
UDZSTE-177.5B




M1MA152WA-T1




M1MA152WK-T1




P6SMBJ30A-5
PTZ-TE25-6.2A
PTZ-TE25-6.8B
RB050L-40TE25
RSX201L-30TE25




SML-512UWT86




UMZ16NT106



1PS302



10ERB20-TB3
UF4005/23



SECTION 3

EXPLODED VIEWS

NOTE:


The components identified  marked are critical for safety.
Replace only with the part number specified.

Note: The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

3-1. KDL-32V2000

3-1-1. REAR COVER ASSY AND STAND ASSY

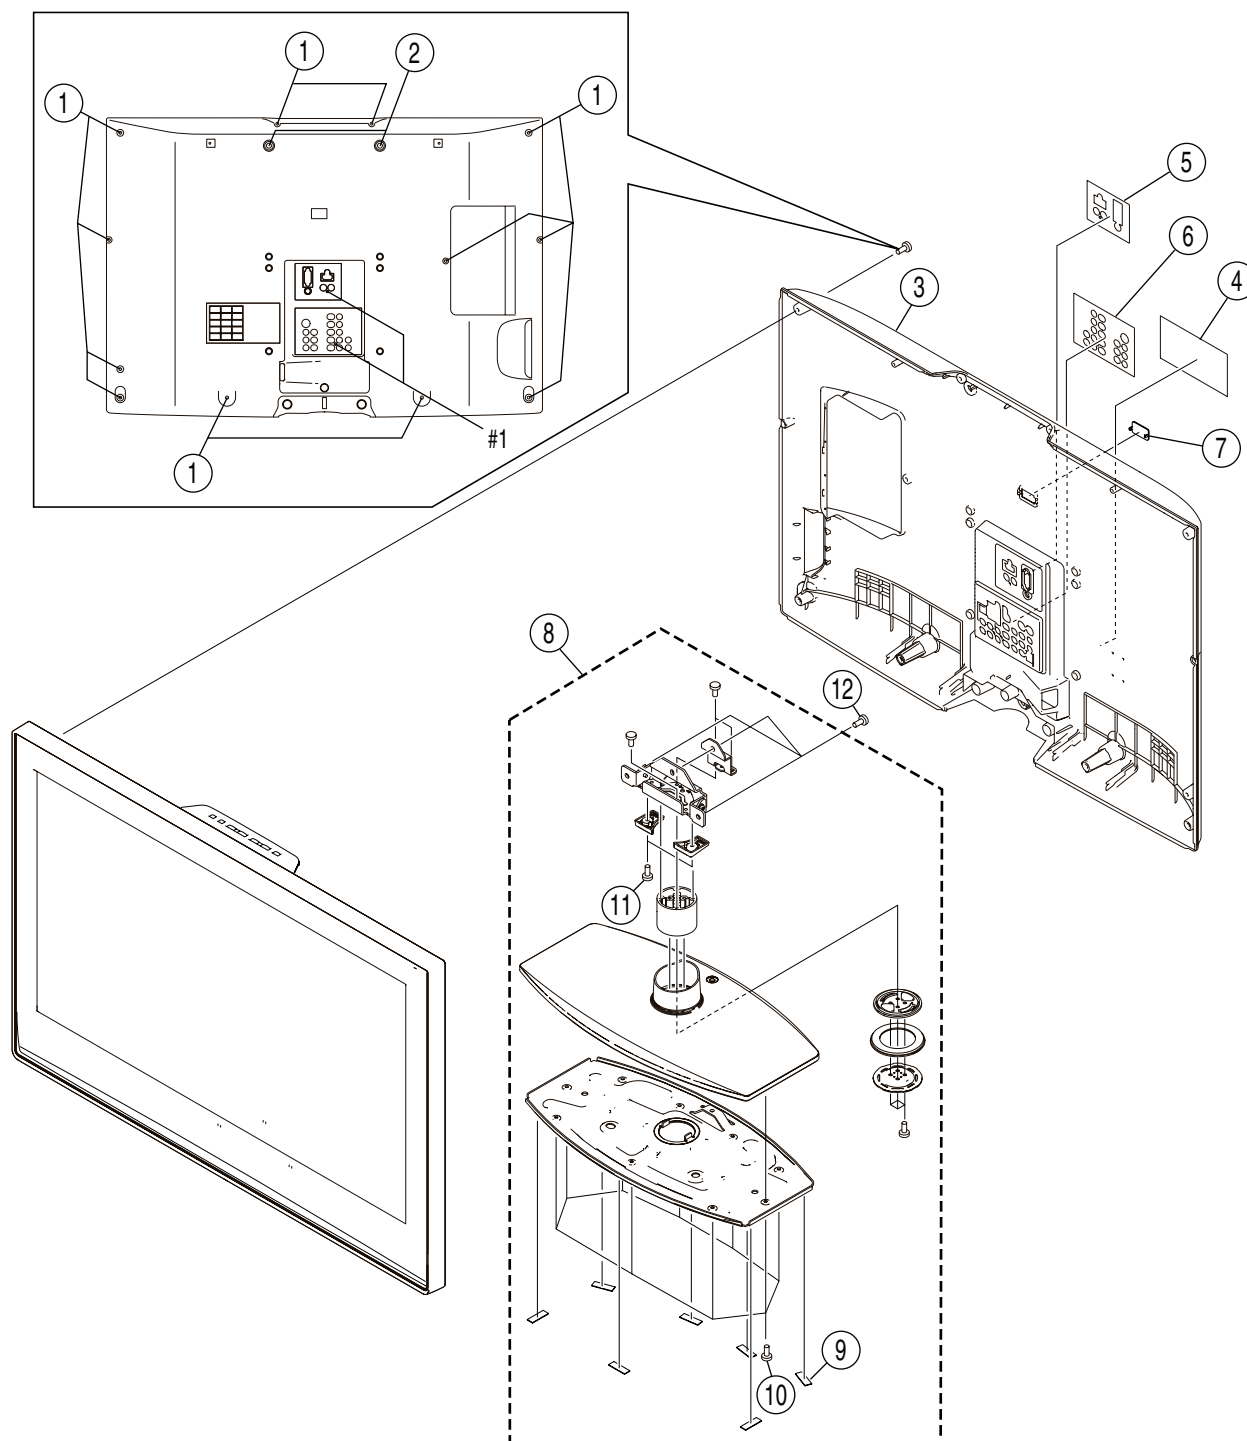


REF. No.	PART No.	DESCRIPTION	MARK
1	2-580-640-01	SCREW, +BVTP2 4X16	
2	2-580-611-01	SCREW, +PSW M6X16	
3	2-672-438-22	COVER, REAR (32)	
4	2-887-476-11	LABEL, INFORMATION	
5	2-668-389-61	LABEL, TERMINAL REAR	

REF. No.	PART No.	DESCRIPTION	MARK
6	2-696-269-31	LABEL, HDMI	
7	2-664-636-01	COVER, ECS	
8	X-2148-379-1	ASSY, STAND (M) B	9, 10, 11
9	2-675-191-02	FOOT	
10	2-580-644-01	SCREW, +KTP2 3X8	
11	2-580-602-01	SCREW, +PSW M4X12	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

KDL-32V2000


3-1-2. H1 AND H2 BOARDS AND FRAME

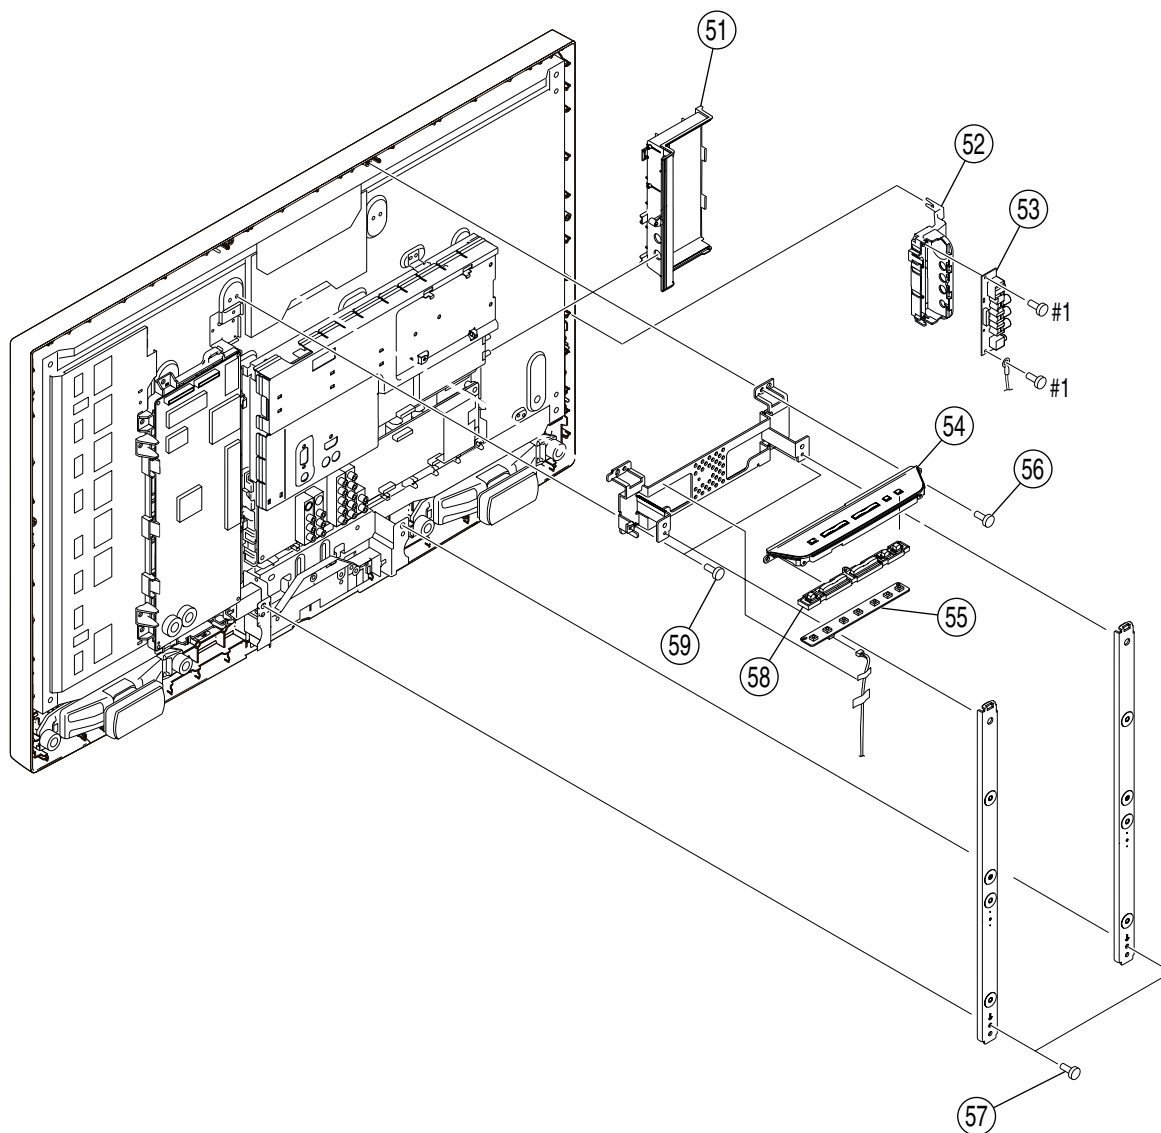

REF. No.	PART No.	DESCRIPTION	MARK
51	X-2176-136-1	SIDE, TERMINAL (M) ASSY	
52	X-2176-139-1	HOLDER, SIDE JACK (M-AUS) ASSY	
53	A-1211-877-A	H2 MOUN	
54	2-663-978-31	COVER, BUTTON	
55	A-1211-876-A	H1 MOUNT	

REF. No.	PART No.	DESCRIPTION	MARK
56	2-580-639-01	SCREW, +BVTP2 4X12	
57	2-580-603-01	SCREW, +PSW M4X16	
58	2-663-977-01	BUTTON, MULTI	
59	2-580-600-01	SCREW, +PSW M4X8	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

KDL-32V2000
3-1-3. CHASSIS-1

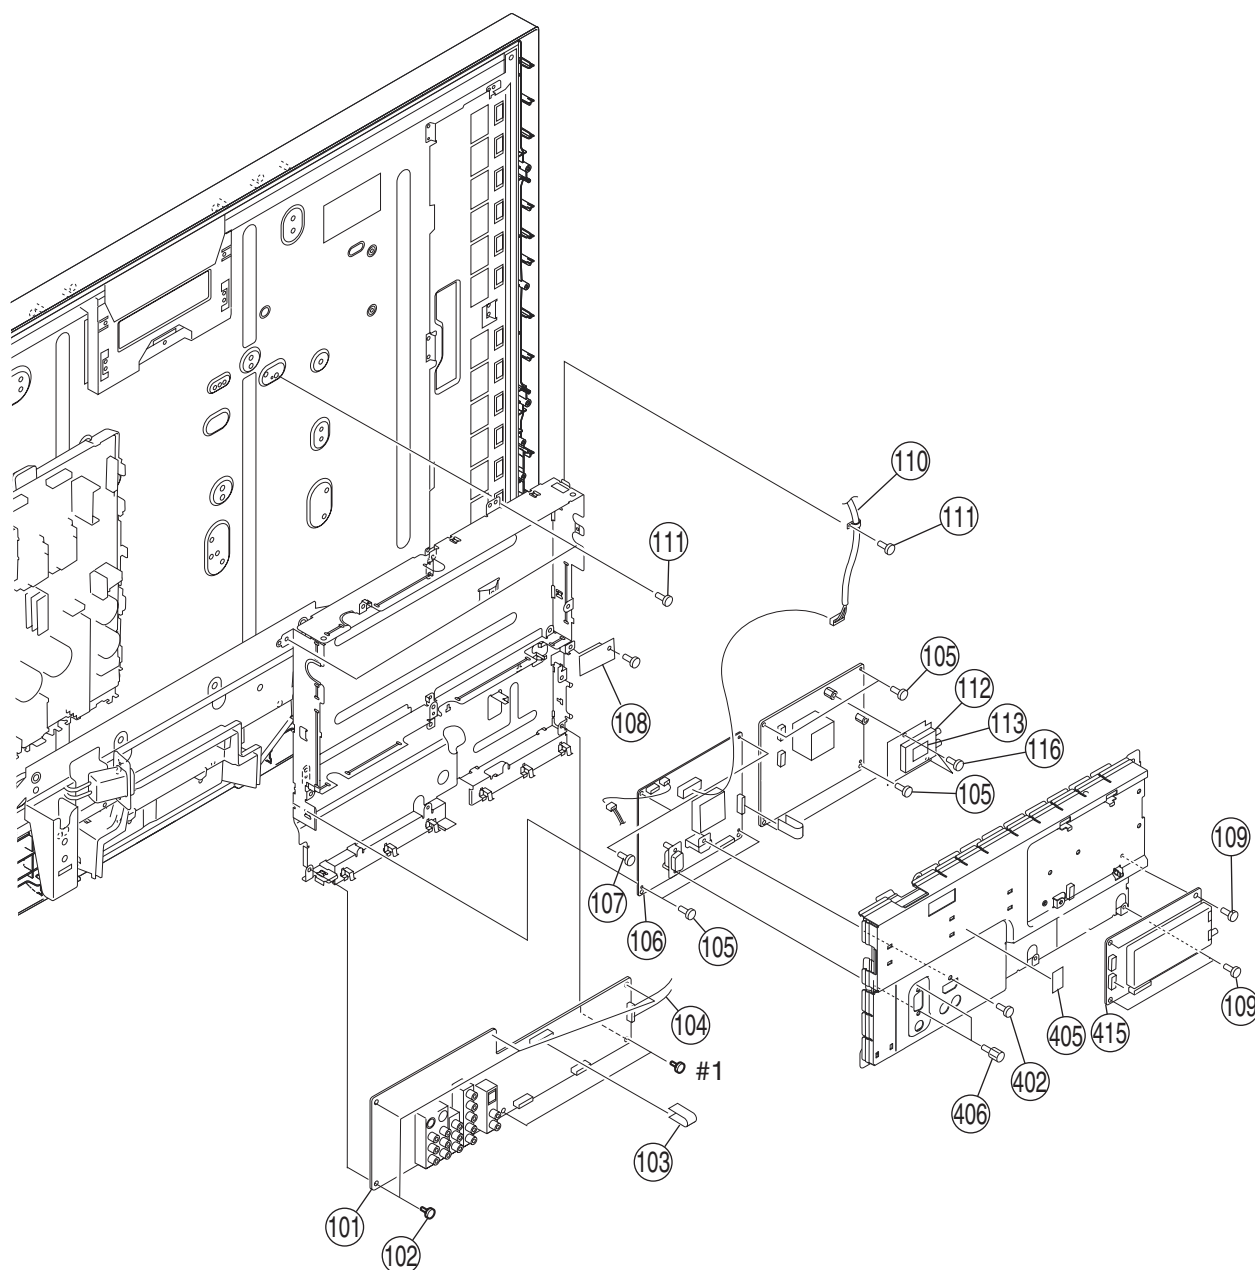


Note: The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

REF. No.	PART No.	DESCRIPTION	MARK
101	A-1183-647-A	AG MOUNT	
102	2-674-965-11	SCREW, +PSW 3SG	
103	1-910-024-83	FFC CONNECTOR ASSY 49P	
104	1-910-030-24	SP CONNECTOR	
105	2-674-965-11	SCREW, +PSW 3SG	
106	 A-1203-529-A	B MOUNT	
107	2-580-629-01	SCREW, +BVST 3X8	
108	A-1193-318-A	J MOUNT	
109	2-580-591-01	SCREW, +PSW M3X5	
110	1-832-470-11	HERNESS WITH CONNECTOR (LVDS)	

REF. No.	PART No.	DESCRIPTION	MARK
111	2-580-591-01	SCREW, +PSW M3X5	
112	1-693-720-21	TUNER	
113	2-586-175-01	SHEET B, RADIATION	
114	2-580-626-01	SCREW, SP4-40 UNC(HEX)	
115	A-1183-902-A	TUG MOUNT	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	


KDL-32V2000
3-1-4. CHASSIS-2

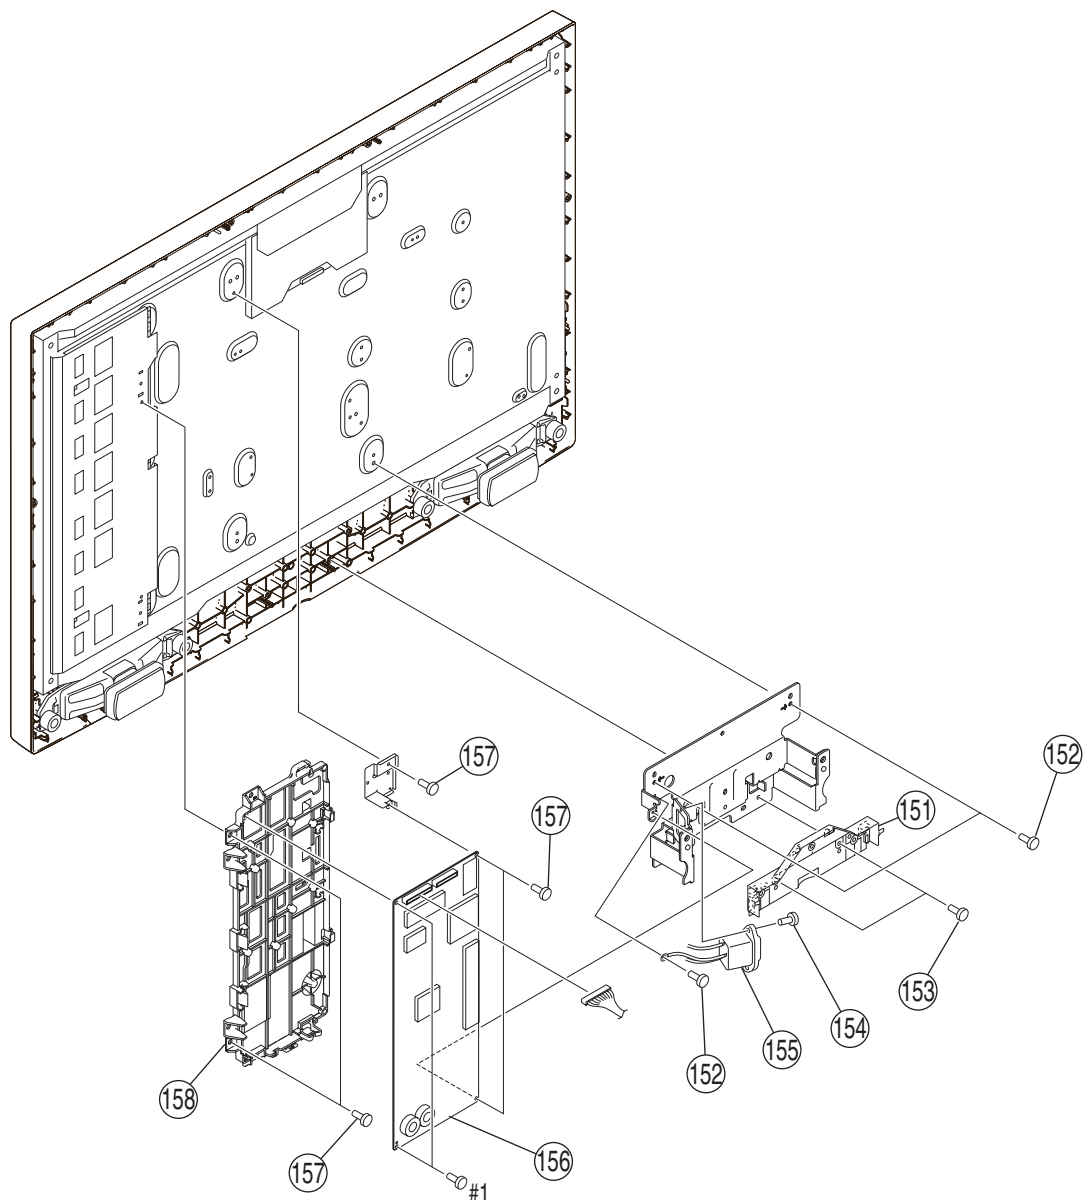

REF. No.	PART No.	DESCRIPTION	MARK
151	2-660-802-01	COVER, UNDER (M)	
152	2-580-600-01	SCREW, +PSW M4X8	
153	2-580-640-01	SCREW, +BVTP2 4X16	
154	2-596-649-01	+KTT 3X10 (S TYPE)	
155	1-819-729-14	INLET, AC (WITH NOISE FILTER)	

REF. No.	PART No.	DESCRIPTION	MARK
156	1-468-980-12	G1 MOUNT	
157	2-580-591-01	SCREW, +PSW M3X5	
158	X-2109-589-1	BRACKET, G1 ASSY (A)	159
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

KDL-32V2000
3-1-5. H4 BOARD AND SPEAKER

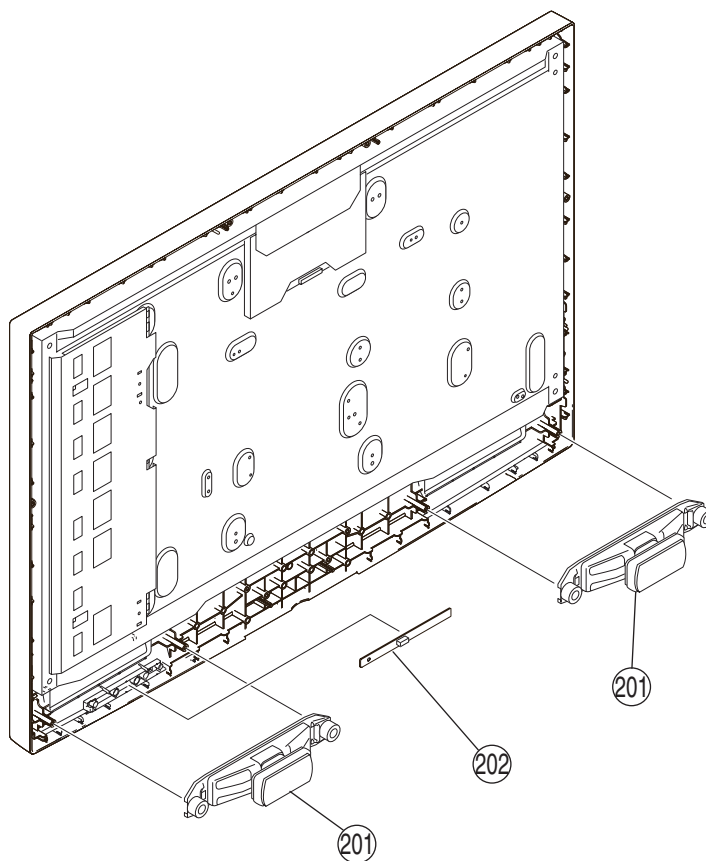


REF. No.	PART No.	DESCRIPTION	MARK
201	1-826-363-11	LOUDSPEAKER (4.2X15CM)	
202	A-1211-878-A	H4 MOUNT	

REF. No.	PART No.	DESCRIPTION	MARK
----------	----------	-------------	------

KDL-32V2000

3-1-6. BEZEL ASSY AND LCD PANEL

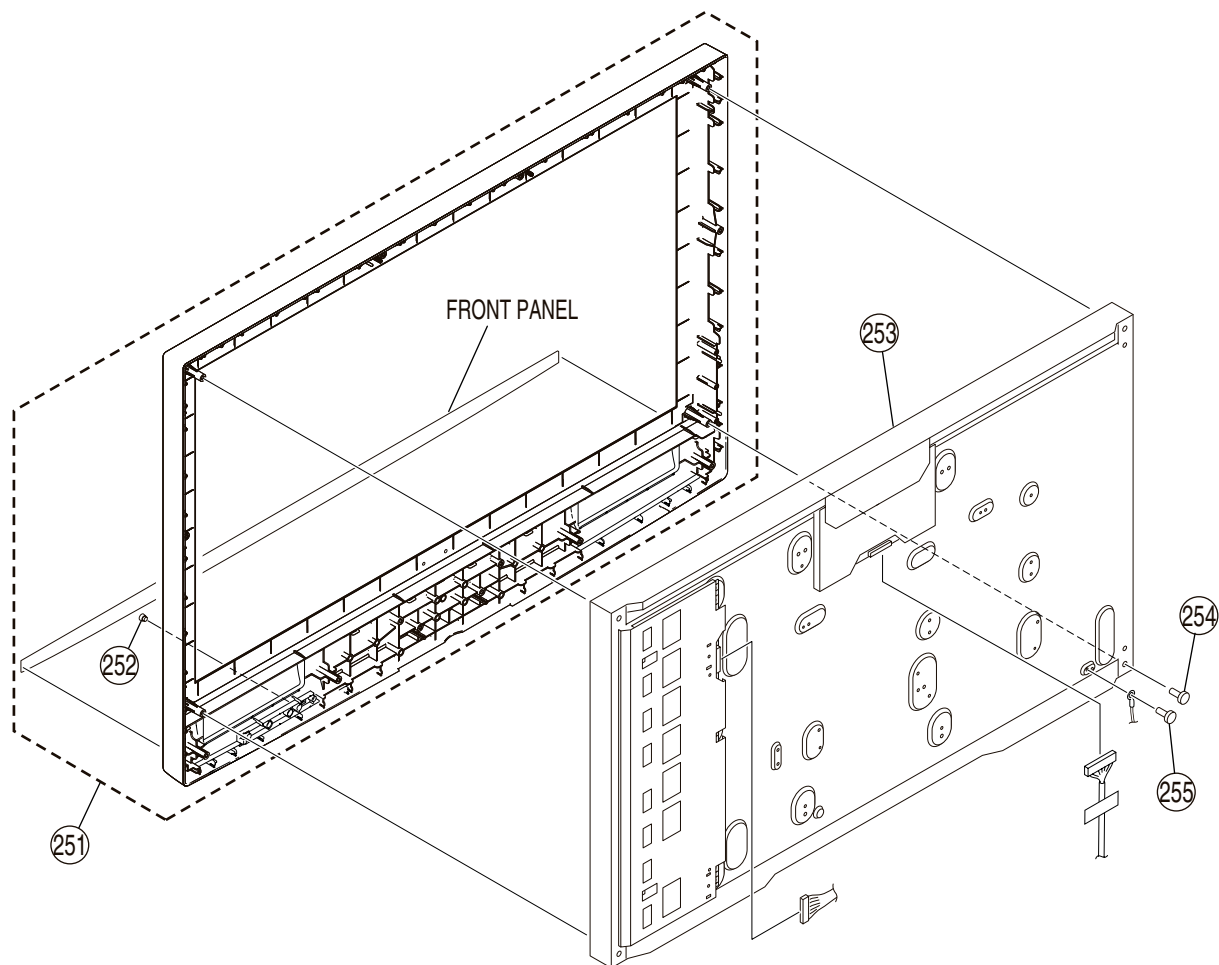


REF. No.	PART No.	DESCRIPTION	MARK
251	X-2109-500-5	BEZEL (32ST) ASSY	252
252	X-2176-252-1	GUIDE, LIGHT ASSY	
253	2-679-403-41	ORNAMENTAL PANEL 932VJ)	
254	1-802-135-51	LCD PANEL (32INCH WXGA+TFT)	
255	2-580-591-01	SCREW, +PSW M3X5	

REF. No.	PART No.	DESCRIPTION	MARK
----------	----------	-------------	------

3-2. KDL-40/46V2000


3-2-1. REAR COVER ASSY AND STAND ASSY

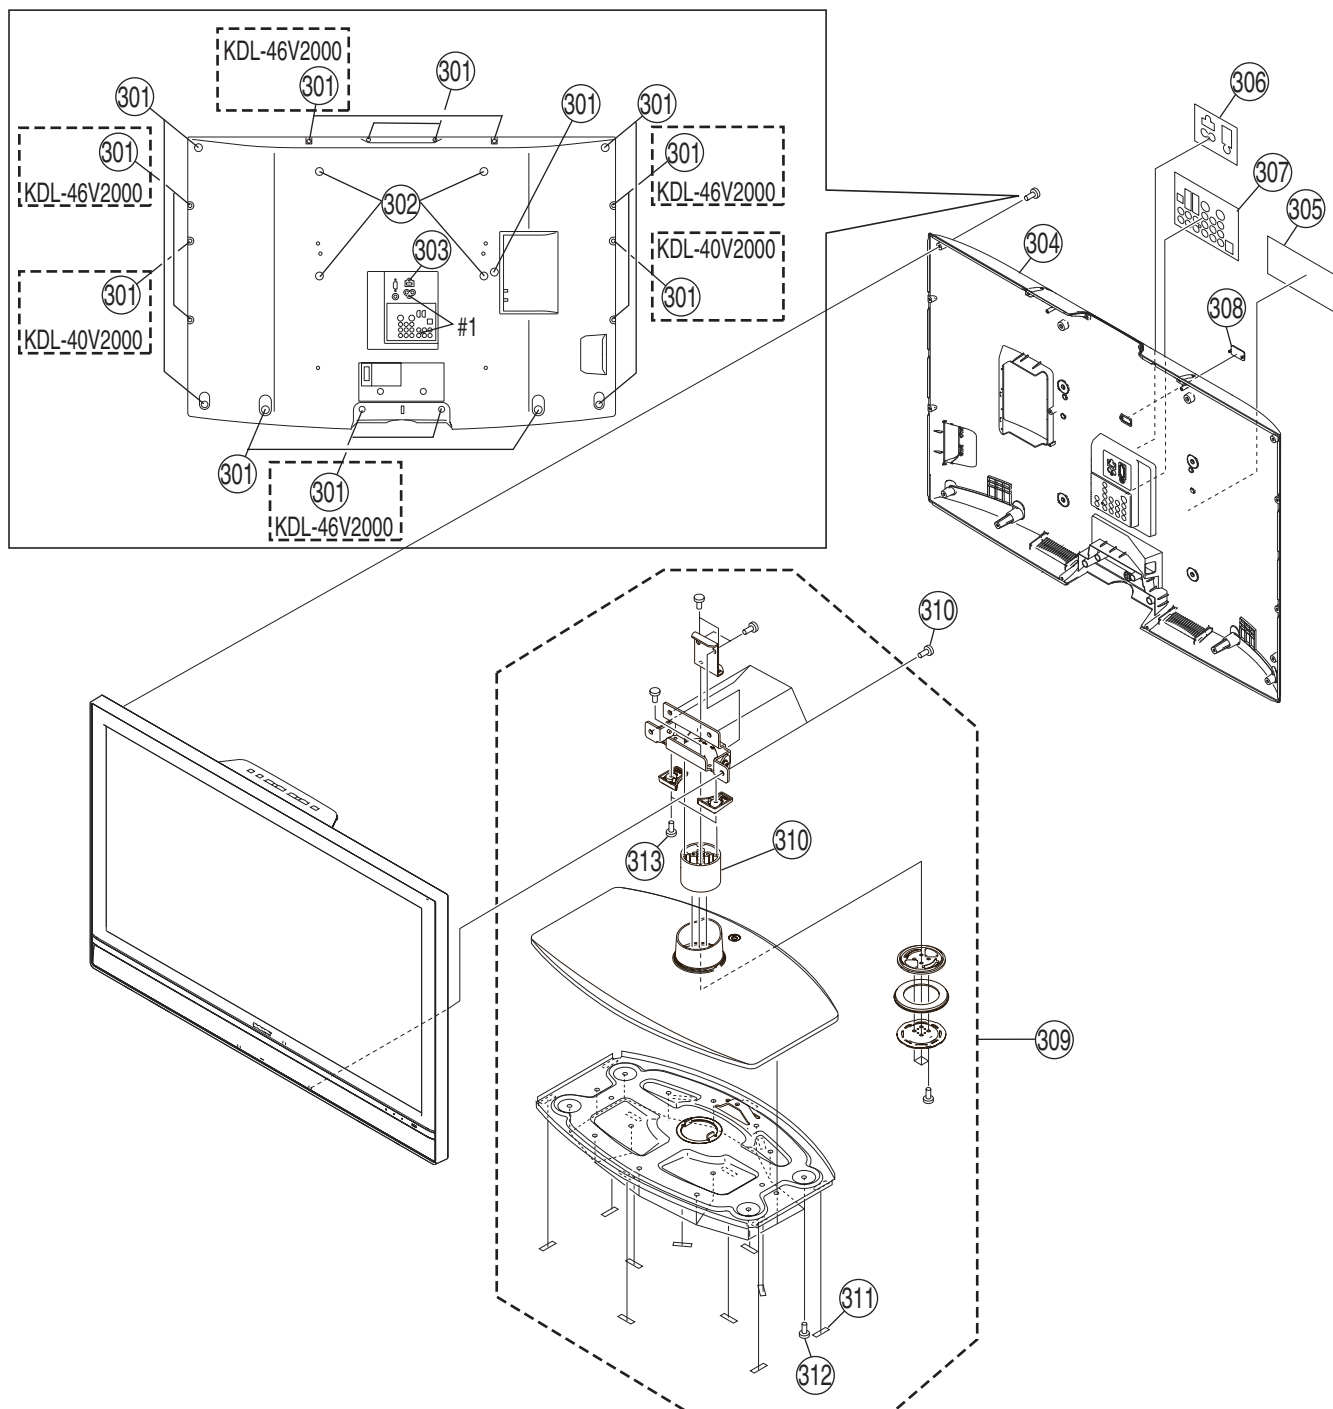

REF. No.	PART No.	DESCRIPTIONRE	MARK
301	2-580-640-01	SCREW, +BVTP2 4X16	
302	2-580-611-01	SCREW, +PSW M6X16	
303	2-580-591-01	SCREW, +PSW M3X5	
304	X-2109-842-1	COVER (40VJ), REAR ASSY (KDL-40V2000)	
	X-2148-061-1	COVER (46V), REAR ASSY (KDL-46V2000)	
305	2-887-476-01	LABEL, INFORMATION (KDL-40V2000)	
	2-887-476-21	LABEL, INFORMATION (KDL-46V2000)	
306	2-696-269-31	LABEL, HDMI	
307	2-668-389-61	LABEL, TERMINAL REAR	
308	2-664-636-01	COVER, ECS	
309	X-2148-378-2	STAND ASSY (L) B	310, 311, 312, 313
310	* 2-687-400-01	NECK (L)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
311	2-675-191-02	FOOT	
312	2-580-647-01	SCREW, +KTP2 4X12	
313	2-580-602-01	SCREW, +PSW M4X12	
314	2-580-608-01	SCREW, +PSW M5X16	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

KDL-40/46V2000
3-2-2. CHASSIA-1

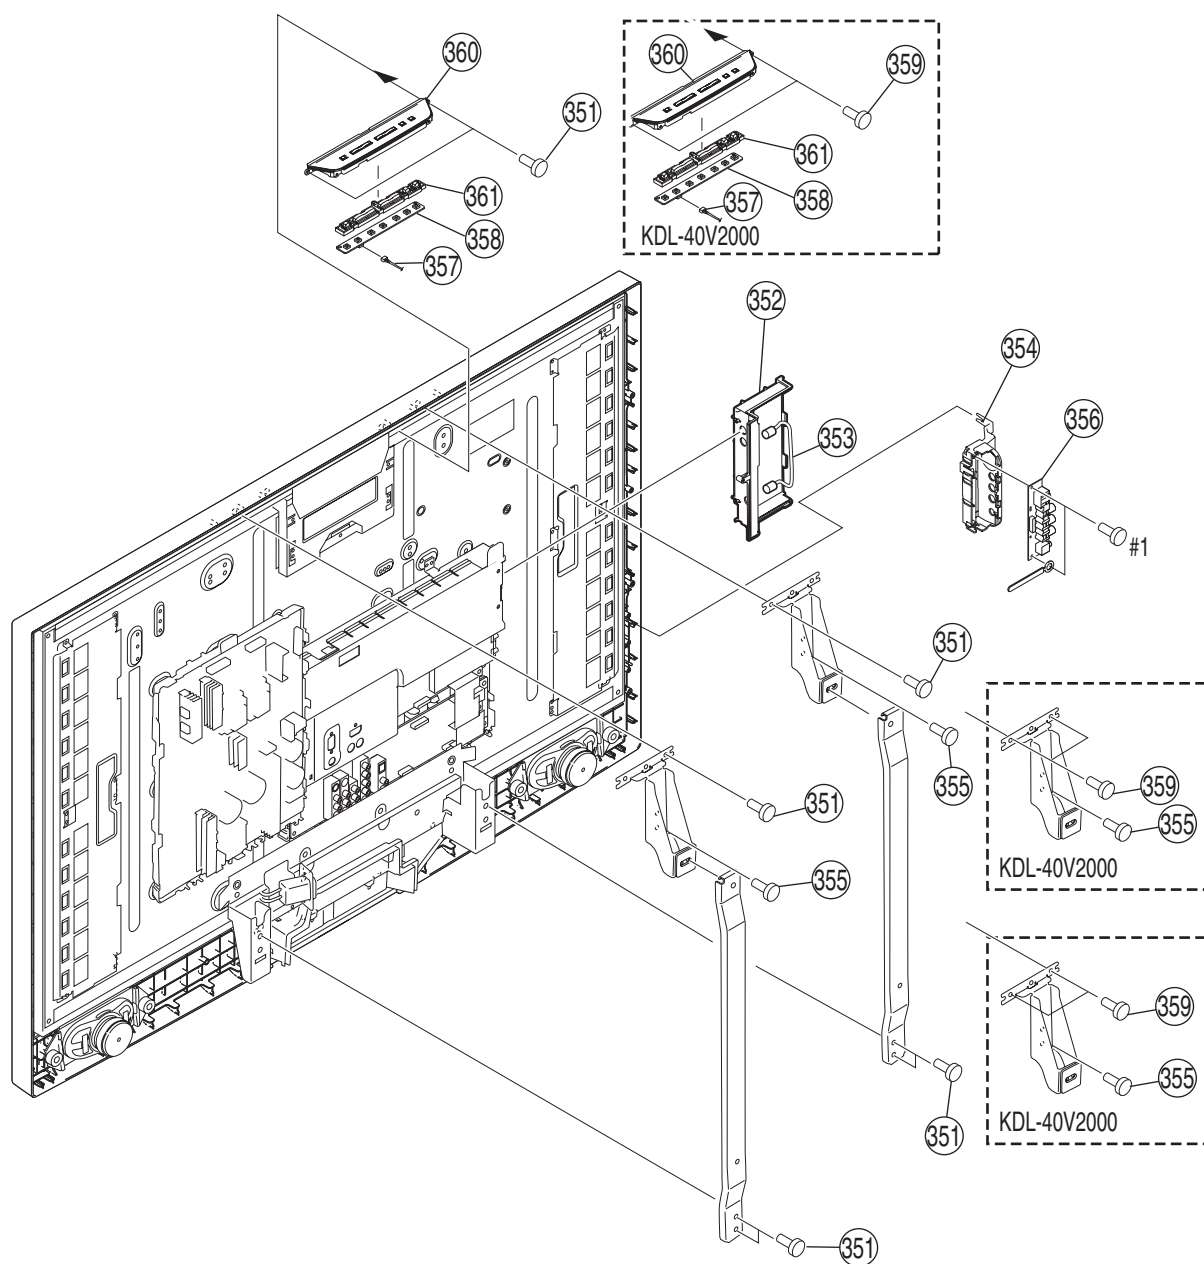


REF. No.	PART No.	DESCRIPTIONRE	MARK
351	2-580-608-01	SCREW, +PSW M5X16	
352	X-2176-194-1	SIDE,TERMINAL (M) ASSY	
353	1-833-150-11	ANTENNA CABLE	
354	2-663-986-31	HOLDER, SIDE JACK (L)(KDL-40V2000)	
	X-2176-195-1	HOLDER, SIDE JACK (L-AUS) ASSY (KDL-46V2000)	
355	2-580-606-01	SCREW, +PSW M5X8	

REF. No.	PART No.	DESCRIPTIONRE	MARK
356	A-1211-877-A	H2 MOUNT (KDL-40V2000)	
	A-1211-879-A	H46 MOUNT (KDL-46V2000)	
357	1-910-024-91	CONNECTOR ASSY 3P	
358	A-1211-876-A	H1 MOUNT	
359	2-580-639-01	SCREW, +BVTP2 4X12 (KDL-40V2000)	
360	2-663-978-31	COVER, BOTTON	
361	2-663-977-01	BOTTON, MULTI	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

KDL-40/46S200A

3-2-3. CHASSIS-1

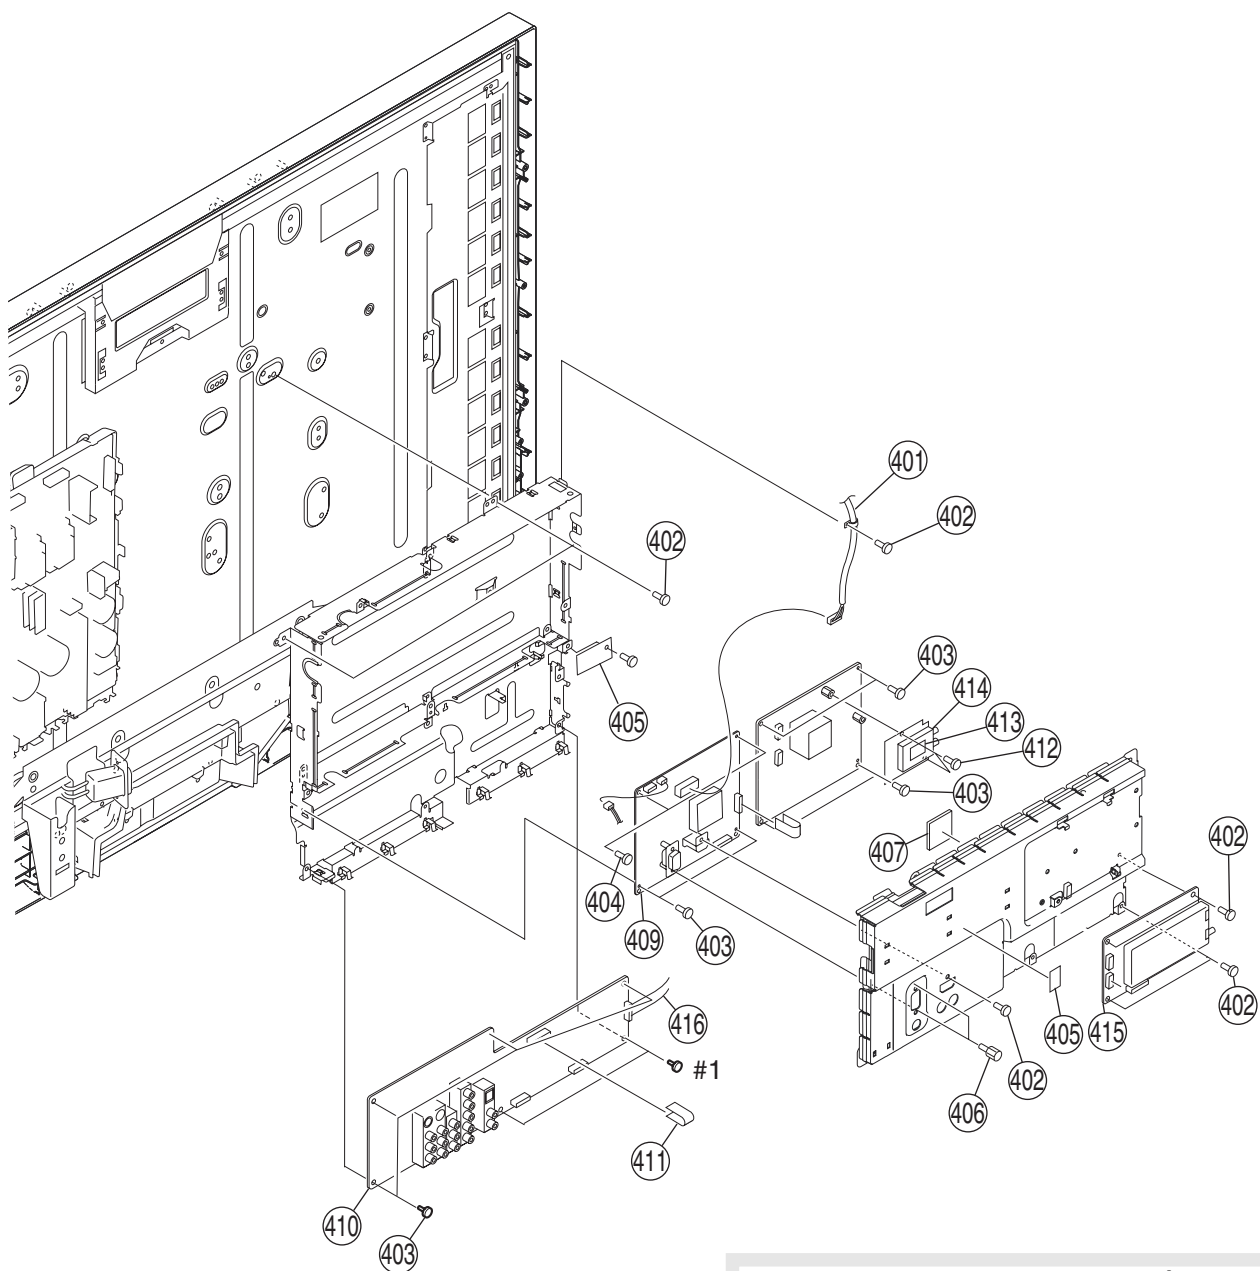


Note: The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

REF. No.	PART No.	DESCRIPTIONRE	MARK
401	1-832-470-11	HARNESS WITH CONNECTOR (LVDS) (KDL-40V2000)	
	1-832-469-12	HARNESS WITH CONNECTOR (LVDS) (KDL-46V2000)	
402	2-580-591-01	SCREW, +PSW M3X5	
403	2-674-965-11	SCREW, +PSW 3SG	
404	2-580-629-01	SCREW, +BVST 3X8	
405	A-1193-318-A	J MOUNT	
406	2-580-626-01	SCREW, SP 4-40 UNC(HEX)	
407	* 4-092-814-02	CUSHION D	
408	1-910-030-48	FFC CONNECTOR ASSY 20P	
409	 A-1203-527-A	B MOUNT (KDL-46V2000)	
	 A-1203-528-A	B MOUNT (KDL-40V2000)	
410	A-1183-647-A	AG MOUNT	

REF. No.	PART No.	DESCRIPTIONRE	MARK
411	1-910-024-83	FFC CONNECTOR ASSY 49P	
412	2-580-595-01	SCREW, +PSW M3X12 (KDL-40V2000)	
413	2-586-175-01	SHEET B, RADIATION	
414	1-693-720-21	TUNER	
415	A-1183-902-A	TUG MOUNT	
416	1-910-030-31	SP CONNECTOR ASSY 40P (KDL-40V2000)	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	


KDL-40/46V2000
3-2-4. CHASSIS-2

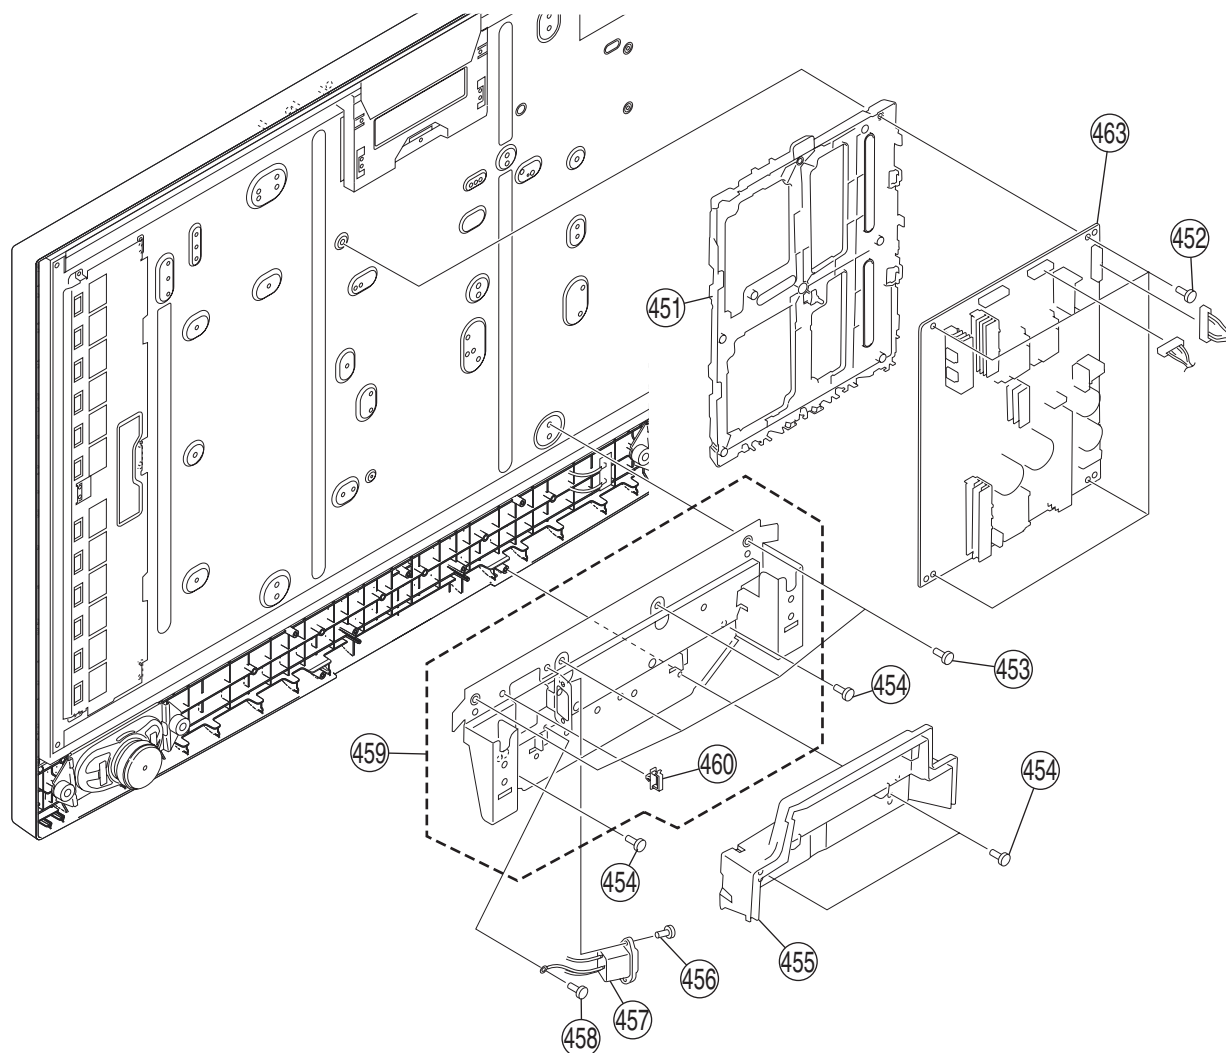

REF. No.	PART No.	DESCRIPTIONRE	MARK
451	2-664-617-01	BRACKET, G2	
452	2-674-965-01	SCREW, +PSW 3SG	
453	2-580-606-01	SCREW, +PSW M5X8	
454	2-580-640-01	SCREW, +BVTP2 4X16	
455	2-687-624-01	COVER, UNDER (L)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
456	2-596-649-01	+KTT 3X10 (S TYPE)	
457	1-819-729-14	INLET, AC (WITH NOISE FILTER)	
458	2-580-600-01	SCREW, +PSW M4X8	
459	X-2109-168-4	FRAME, BOTTOM (L) ASSY	461
460	2-650-770-21	SLIDE, CLAMP	
461	* A-1184-357-B	G2A MOUNT	

KDL-40/46V2000
3-2-5. SPEAKER AND H4 BOARD

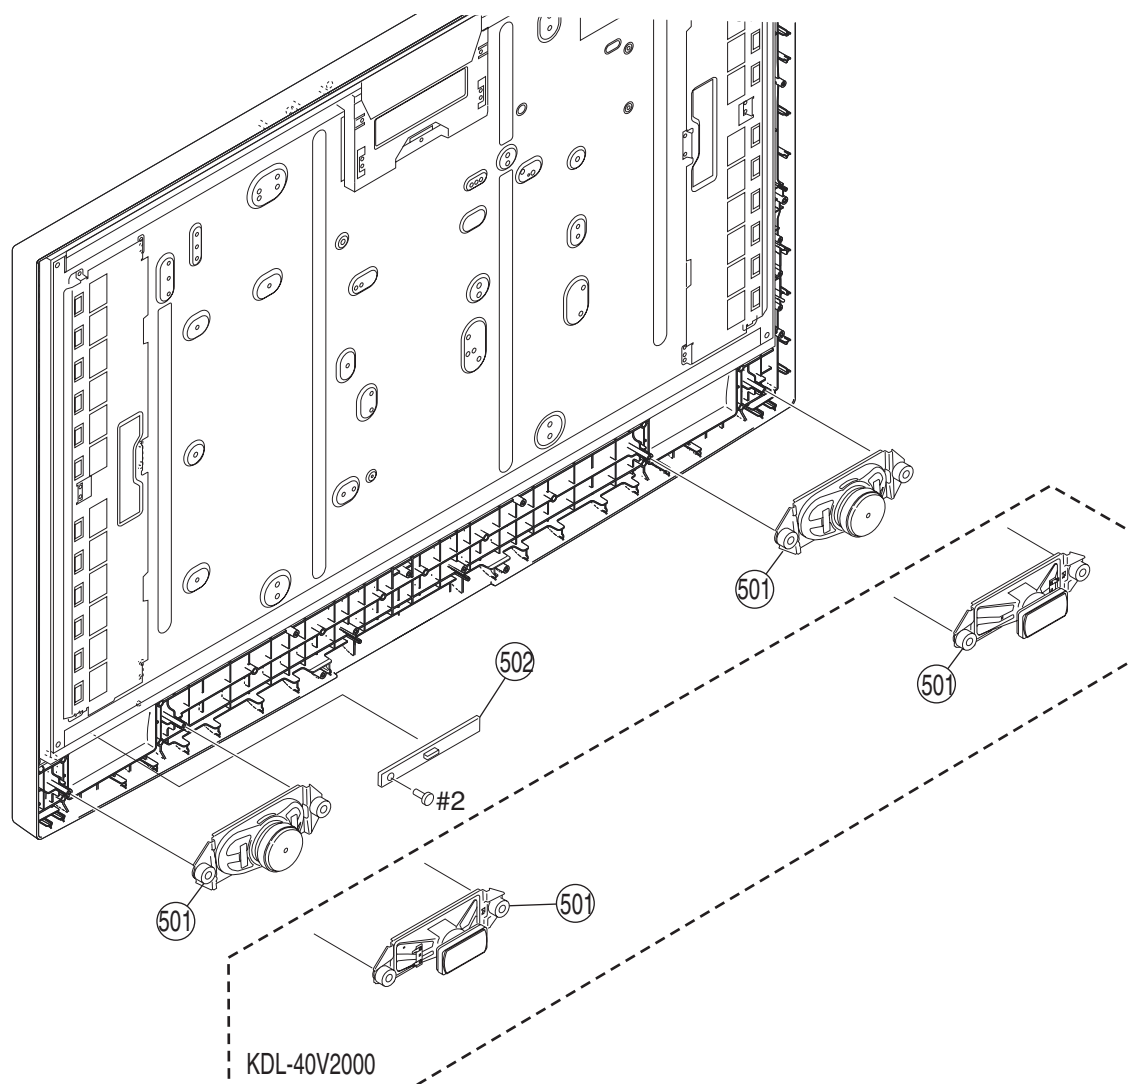


REF. No.	PART No.	DESCRIPTIONRE	MARK
501	1-826-362-11	LOUDSPEAKER (5.5X15.5CM) (KDL-40V2000)	
	1-826-435-11	LOUDSPEAKER (13X7CM) (KDL-46V2000)	
502	A-1211-878-A	H4 MOUNT	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#2	7-685-647-79	SCREW +BVTP 3X10 TYPE2 IT-3	

KDL-40/46V2000


3-2-6. BEZEL ASSY AND LCD PANEL

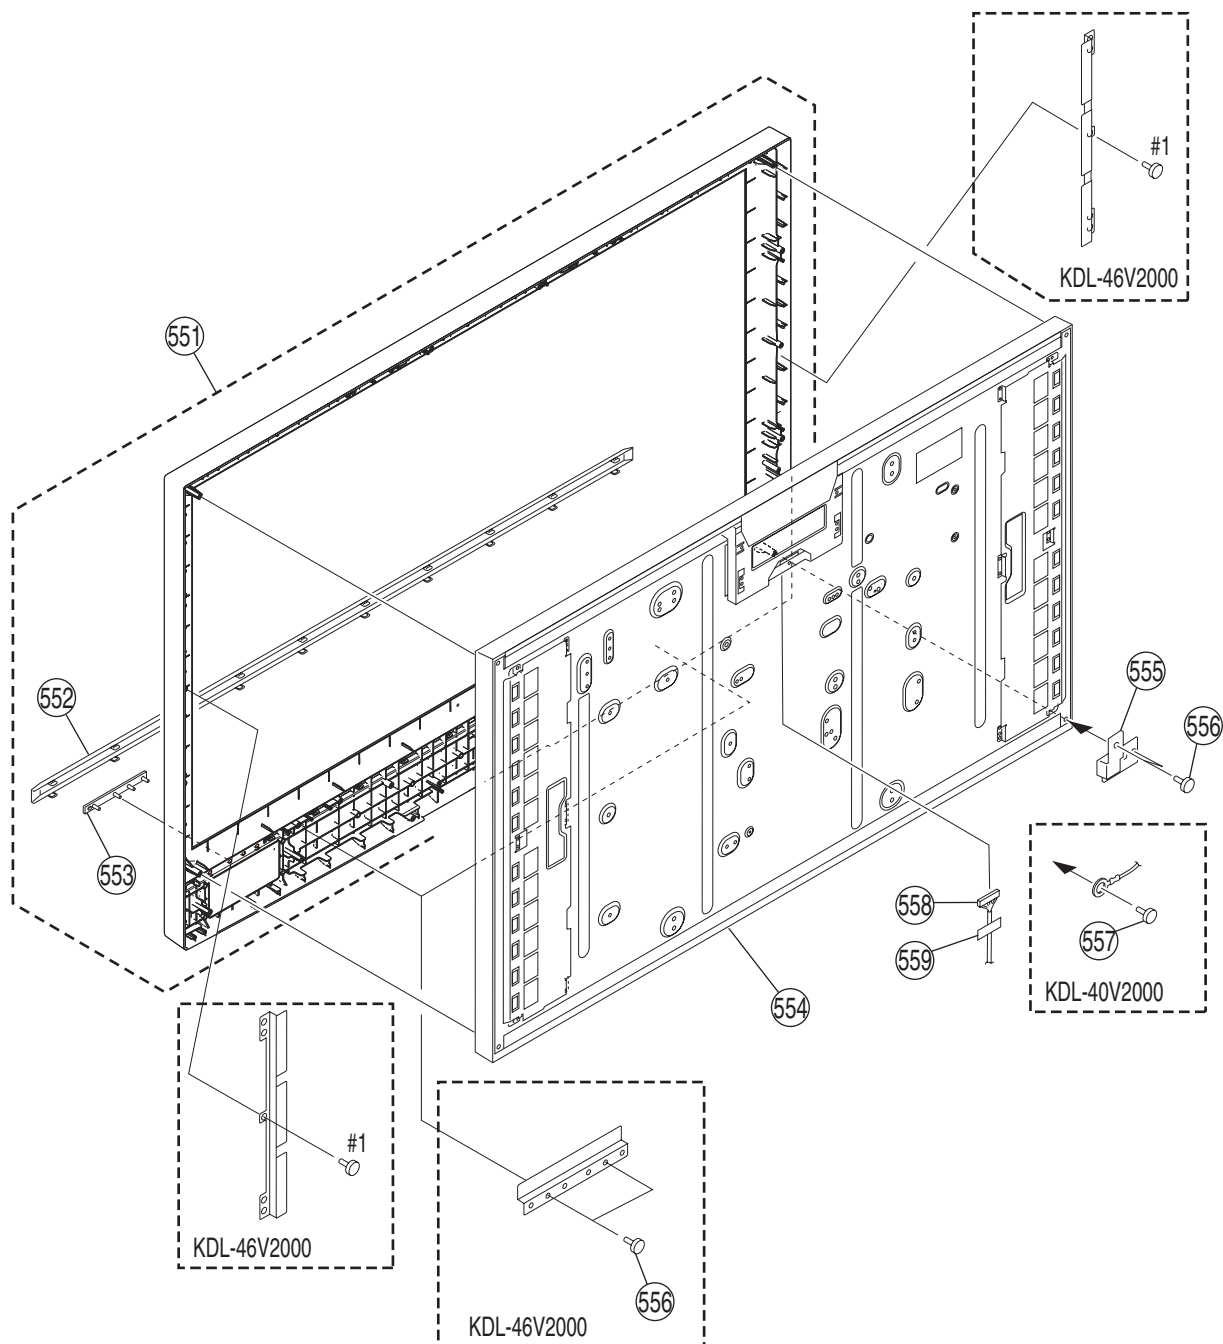

REF. No.	PART No.	DESCRIPTIONRE	MARK
551	X-2109-501-1	BEZEL (40VJ)ASSY (KDL-40V2000)	
	X-2109-502-4	BEZEL (46VJ)ASSY (KDL-46V2000)	
552	2-679-404-31	ORNAMENTAL PANEL (40VJ) (KDL-40V2000)	
552	2-679-405-31	ORNAMENTAL PANEL (46VJ) (KDL-46V2000)	
553	2-671-016-02	GUIDE, LIGHT	
554	1-802-133-41	LCD PANEL (46INCH WXGA+TFT) (KDL-46V2000)	
	1-802-267-11	LCD PANEL (40INCH WXGA+TFT) (KDL-40V2000)	
555	* 2-682-132-01	BRACKET, PANEL CORNER (KDL-46V2000)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
556	2-580-640-01	SCREW, +BVTP2 4X16	
557	2-580-591-01	SCREW, +PSW M3X5 (KDL-40V2000)	
558	1-832-469-12	HARNESS WITH CONNECTOR (LVDS) (KDL-46V2000)	
	1-832-470-21	HARNESS WITH CONNECTOR (LVDS) (KDL-40V2000)	
559	4-092-814-02	CUSHION D (KDL-46V2000)	
#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	


3-3. PACKING MATERIALS (KDL-32V2000)

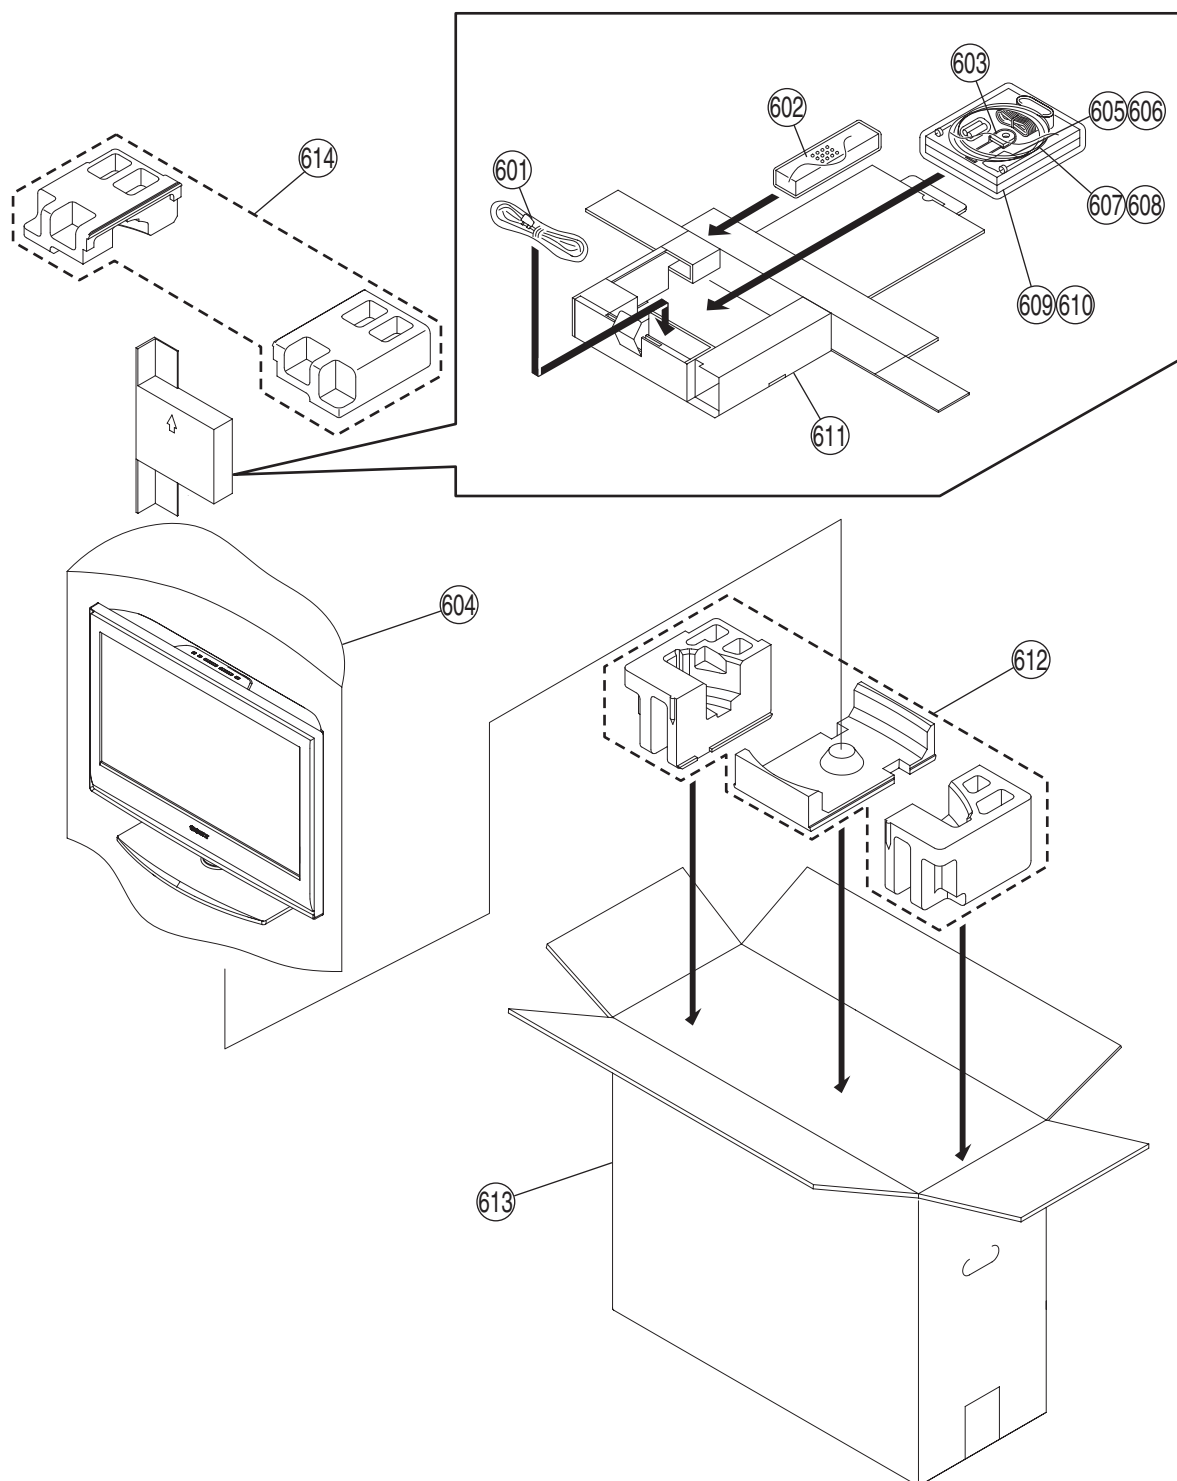

REF. No.	PART No.	DESCRIPTION	MARK
601	1-833-177-11	POWER-SUPPLY CORD SET	
602	1-479-685-21	REMOTE COMMANDER (RE-ED005)	
603	X-2102-511-2	BAG ASSY, RUDDER LOCK	
604	4-377-015-01	BAG, PROTECTION	
605	2-580-663-01	SCREW, WOOD 3.8X20	
606	2-593-320-02	SCREW, CION (M6X18)	
607	1-769-175-21	ANTENNA CABLE	
608	1-831-554-11	CABLE ASSY (15P DSUB CONNECTOR)	
609	2-888-034-11	MANUAL, INSTRUCTION	
610	2-888-626-11	MANUAL, INSTRUCTION (WALL MOUNT)	

REF. No.	PART No.	DESCRIPTION	MARK
611	* 2-664-322-01	BOX, ACCESSORY	
612	* 2-664-321-01	CUSHION (LOWER)	
613	* 2-888-549-01	INDIVIDUAL CARTON	
614	* 2-664-320-01	CUSHION (UPPER)	

3-4. PACKING MATERIALS (KDL-40/46V2000)

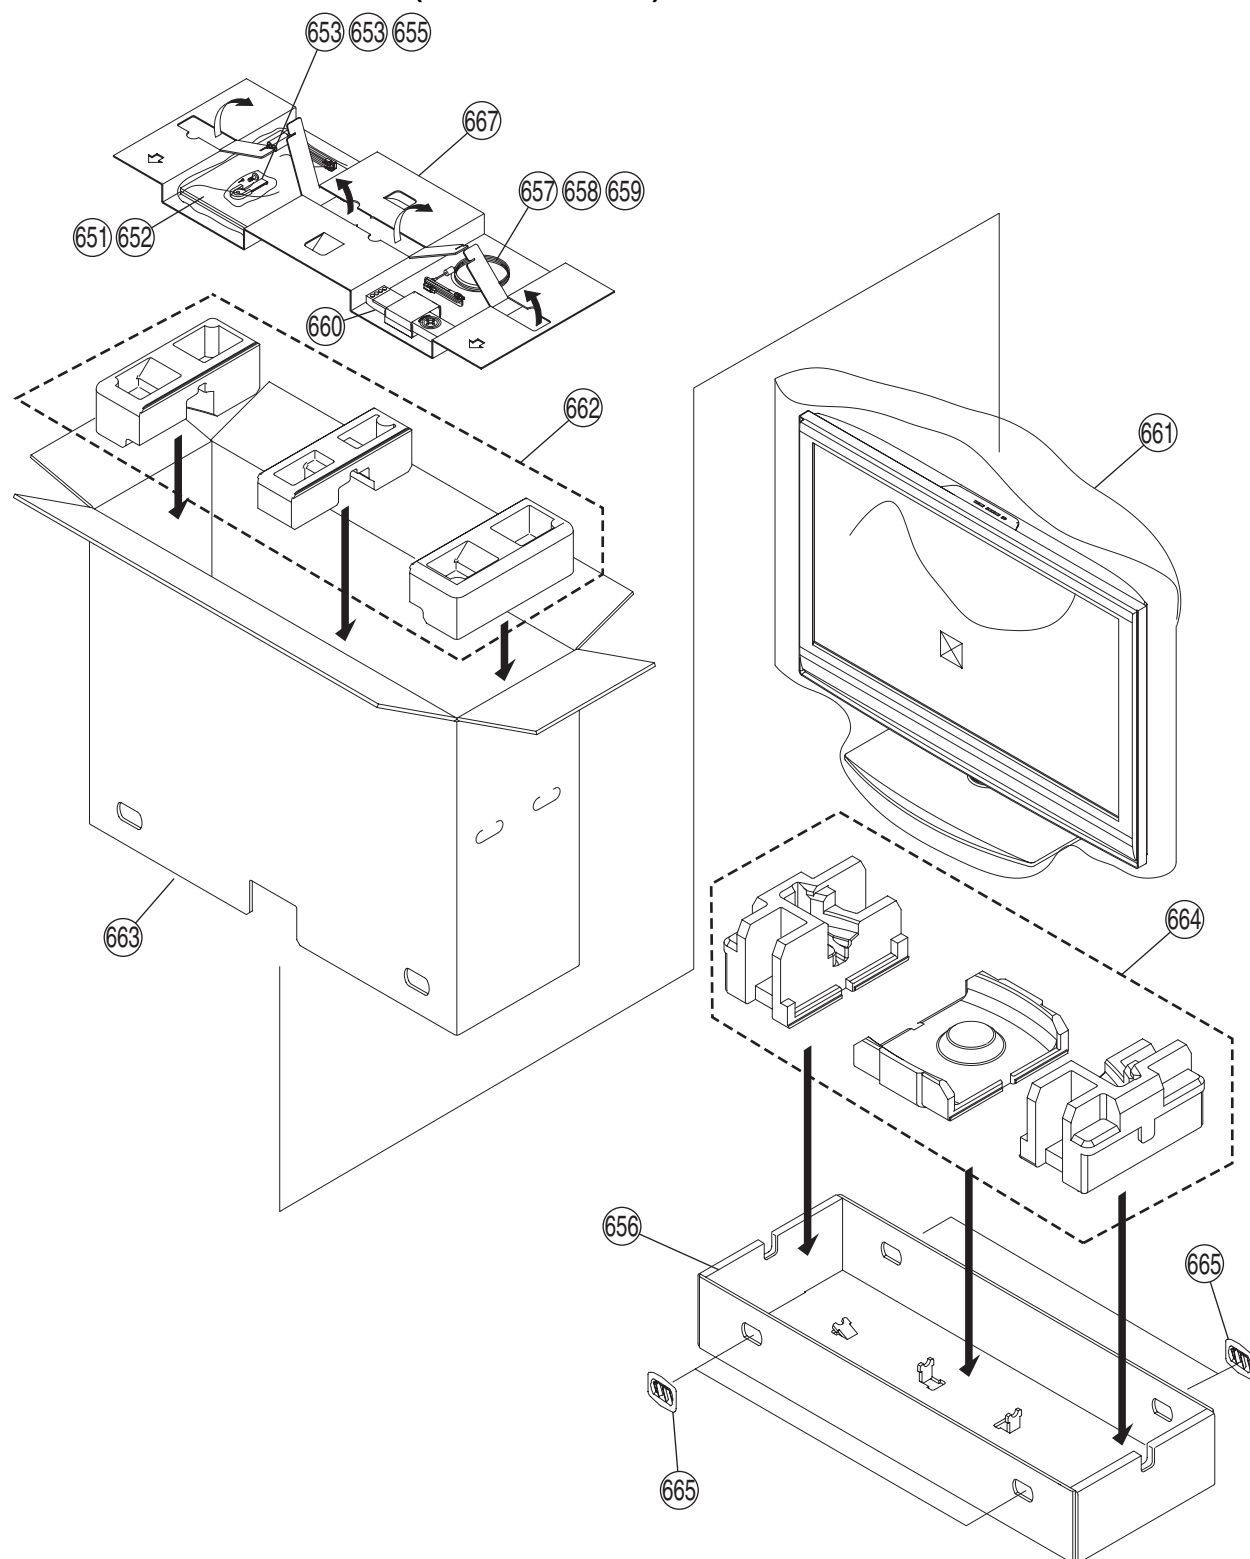

REF. No.	PART No.	DESCRIPTIONRE	MARK
651	2-888-034-11	MANUAL, INSTRUCTION	
652	2-888-03711	MANUAL, INSTRUCTION (WALL MOUNT)	
653	X-2102-511-2	BAG ASSY, RUDDER LOCK	
654	2-580-663-01	SCREW, WOOD 3.8X20	
655	2-593-320-02	SCREW, CION (M6X18)	
656	* 2-663-245-01	TRAY (KDL-40V2000)	
	* 2-670-489-01	TRAY (KDL-46V2000)	
657	1-831-554-11	CABLE ASSY (15P DSUBCONNECTOR)	
658	1-769-175-21	ANTENNA CABLE	
659	1-833-117-11	POWER-SUPPLY CORD SET	
660	1-479-685-21	REMOTE COMMANDER (RM-ED005)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
661	2-653-465-01	BAG, PROTECTION (KDL-40V2000)	
662	* 2-663-102-01	CUSHION (UPPER) (KDL-40V2000)	
	* 2-670-491-01	CUSHION (UPPER) (KDL-46V2000)	
663	* 2-888-550-01	INDIVIDUAL CARTON (KDL-40V2000)	
	* 2-888-551-01	INDIVIDUAL CARTON (KDL-46V2000)	
664	* 2-663-103-01	CUSHION (LOWER) (KDL-40V2000)	
	* 2-670-492-01	CUSHION (LOWER) (KDL-46V2000)	
665	3-674-673-01	STOPPER (A)	

SECTION 4

ELECTRICAL PARTS LIST

NOTE:

The components identified  marked are critical for safety.
Replace only with the part number specified.

When indicating parts by reference number,
please include the board name.

Note: The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

Note: The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

No.	#	Board	Type		Ref. No.	Part No.	Description	Remarks-1	Remarks-2
		B				A-1203-529-A	B MOUNT	32V2000	
		B				A-1203-528-A	B MOUNT	40V2000	
		B				A-1203-527-A	B MOUNT	46V2000	
1		B	CAPACITOR		C1001	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
2		B	CAPACITOR		C1003	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
3		B	CAPACITOR		C1004	1-162-974-11	CERAMIC CHIP 0.01UF 50V		
4		B	CAPACITOR		C1005	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
5		B	CAPACITOR		C1006	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
6		B	CAPACITOR		C1007	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
7		B	CAPACITOR		C1010	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
8		B	CAPACITOR		C1011	1-126-206-11	ELECT CHIP 100UF 20.00% 6.3V		
9		B	CAPACITOR		C1012	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
10		B	CAPACITOR		C1015	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
11		B	CAPACITOR		C1016	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
12		B	CAPACITOR		C1017	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
13		B	CAPACITOR		C1018	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
14		B	CAPACITOR		C1019	1-162-912-11	CERAMIC CHIP 7PF 0.50PF 50V		
15		B	CAPACITOR		C1022	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
16		B	CAPACITOR		C1023	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
17		B	CAPACITOR		C1024	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
18		B	CAPACITOR		C1027	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
19		B	CAPACITOR		C1029	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
20		B	CAPACITOR		C1033	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
21		B	CAPACITOR		C1035	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
22		B	CAPACITOR		C1036	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
23		B	CAPACITOR		C1044	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
24		B	CAPACITOR		C1046	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
25		B	CAPACITOR		C1047	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
26		B	CAPACITOR		C1048	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
27		B	CAPACITOR		C1049	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
28		B	CAPACITOR		C1050	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
29		B	CAPACITOR		C1051	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
30		B	CAPACITOR		C1052	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
31		B	CAPACITOR		C1053	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
32		B	CAPACITOR		C1054	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
33		B	CAPACITOR		C1056	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
34		B	CAPACITOR		C1057	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
35		B	CAPACITOR		C1060	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
36		B	CAPACITOR		C1061	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
37		B	CAPACITOR		C1062	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
38		B	CAPACITOR		C1063	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
39		B	CAPACITOR		C1066	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
40		B	CAPACITOR		C1067	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
41		B	CAPACITOR		C1068	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
42		B	CAPACITOR		C1069	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
43		B	CAPACITOR		C1070	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
44		B	CAPACITOR		C1071	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
45		B	CAPACITOR		C1072	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
46		B	CAPACITOR		C1073	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
47		B	CAPACITOR		C1074	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
48		B	CAPACITOR		C1075	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
49		B	CAPACITOR		C1076	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
50		B	CAPACITOR		C1079	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
51		B	CAPACITOR		C1080	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
52		B	CAPACITOR		C1081	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
53		B	CAPACITOR		C1082	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
54		B	CAPACITOR		C1083	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
55		B	CAPACITOR		C1084	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
56		B	CAPACITOR		C1085	1-115-456-21	DOUBLE LAYER 0.22F 5.5V		
57		B	CAPACITOR		C1087	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
58		B	CAPACITOR		C1091	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
59		B	CAPACITOR		C1092	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
60		B	CAPACITOR		C1093	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
61		B	CAPACITOR		C1094	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
62		B	CAPACITOR		C1100	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
63		B	CAPACITOR		C1110	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
64		B	CAPACITOR		C1701	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
65		B	CAPACITOR		C1704	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
66		B	CAPACITOR		C1706	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
67		B	CAPACITOR		C1707	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
68		B	CAPACITOR		C1708	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
69		B	CAPACITOR		C1710	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
70		B	CAPACITOR		C1711	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V		
71		B	CAPACITOR		C1712	1-100-162-91	CERAMIC CHIP 1UF 50V		
72		B	CAPACITOR		C5000	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
73		B	CAPACITOR		C5002	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
74		B	CAPACITOR		C5003	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
75		B	CAPACITOR		C5005	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
76		B	CAPACITOR		C5006	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
77		B	CAPACITOR		C5007	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
78		B	CAPACITOR		C5009	1-162-905-11	CERAMIC CHIP 1PF 0.25PF 50V		
79		B	CAPACITOR		C5010	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
80		B	CAPACITOR		C5011	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
81		B	CAPACITOR		C5012	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
82		B	CAPACITOR		C5013	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
83		B	CAPACITOR		C5014	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
84		B	CAPACITOR		C5015	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
85		B	CAPACITOR		C5016	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
86		B	CAPACITOR		C5017	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
87		B	CAPACITOR		C5018	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
88		B	CAPACITOR		C5019	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
89		B	CAPACITOR		C5020	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
90		B	CAPACITOR		C5021	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
91		B	CAPACITOR		C5022	1-162-905-11	CERAMIC CHIP 1PF 0.25PF 50V		
92		B	CAPACITOR		C5023	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
93		B	CAPACITOR		C5024	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
94		B	CAPACITOR		C5025	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
95		B	CAPACITOR		C5027	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
96		B	CAPACITOR		C5028	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
97		B	CAPACITOR		C5032	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
98		B	CAPACITOR		C5033	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
99		B	CAPACITOR		C5201	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
100		B	CAPACITOR		C5202	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
101		B	CAPACITOR		C5204	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
102		B	CAPACITOR		C5205	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
103		B	CAPACITOR		C5208	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
104		B	CAPACITOR		C5209	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
105		B	CAPACITOR		C5211	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
106		B	CAPACITOR		C5212	1-162-979-11	CERAMIC CHIP 0.0027UF 10.00% 50V		
107		B	CAPACITOR		C5213	1-162-979-11	CERAMIC CHIP 0.0027UF 10.00% 50V		
108		B	CAPACITOR		C5216	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
109		B	CAPACITOR		C5217	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
110		B	CAPACITOR		C5218	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
111		B	CAPACITOR		C5219	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
112		B	CAPACITOR		C5220	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
113		B	CAPACITOR		C5221	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
114		B	CAPACITOR		C5222	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
115		B	CAPACITOR		C5224	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
116		B	CAPACITOR		C5225	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
117		B	CAPACITOR		C5226	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
118		B	CAPACITOR		C5230	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
119		B	CAPACITOR		C5231	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
120		B	CAPACITOR		C5234	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
121		B	CAPACITOR		C5236	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
122		B	CAPACITOR		C5237	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
123		B	CAPACITOR		C5239	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
124		B	CAPACITOR		C5240	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
125		B	CAPACITOR		C5241	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
126		B	CAPACITOR		C5246	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
127		B	CAPACITOR		C5250	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
128		B	CAPACITOR		C5252	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
129		B	CAPACITOR		C5253	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
130		B	CAPACITOR		C5254	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
131		B	CAPACITOR		C5255	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
132		B	CAPACITOR		C5256	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
133		B	CAPACITOR		C5257	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
134		B	CAPACITOR		C5258	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
135		B	CAPACITOR		C5259	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
136		B	CAPACITOR		C5260	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
137		B	CAPACITOR		C5262	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
138		B	CAPACITOR		C5265	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
139		B	CAPACITOR		C5269	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
140		B	CAPACITOR		C5270	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
141		B	CAPACITOR		C5271	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
142		B	CAPACITOR		C5273	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
143		B	CAPACITOR		C5274	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
144		B	CAPACITOR		C5278	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
145		B	CAPACITOR		C5279	1-125-837-91	CERAMIC CHIP 1UF 10% 6.3V		
146		B	CAPACITOR		C5280	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
147		B	CAPACITOR		C5281	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
148		B	CAPACITOR		C5502	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
149		B	CAPACITOR		C5503	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
150		B	CAPACITOR		C5504	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
151		B	CAPACITOR		C5506	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
152		B	CAPACITOR		C5507	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
153		B	CAPACITOR		C5508	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
154		B	CAPACITOR		C5510	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
155		B	CAPACITOR		C5512	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
156		B	CAPACITOR		C5513	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
157		B	CAPACITOR		C5514	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
158		B	CAPACITOR		C6002	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
159		B	CAPACITOR		C6003	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
160		B	CAPACITOR		C6004	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
161		B	CAPACITOR		C6005	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
162		B	CAPACITOR		C6006	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
163		B	CAPACITOR		C6008	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
164		B	CAPACITOR		C6009	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
165		B	CAPACITOR		C6012	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
166		B	CAPACITOR		C6013	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
167		B	CAPACITOR		C6014	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
168		B	CAPACITOR		C7000	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
169		B	CAPACITOR		C7001	1-112-064-11	CERAMIC CHIP 2.2UF 10% 10V		
170		B	CAPACITOR		C7002	1-112-064-11	CERAMIC CHIP 2.2UF 10% 10V		
171		B	CAPACITOR		C7003	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
172		B	CAPACITOR		C7004	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
173		B	CAPACITOR		C7005	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
174		B	CAPACITOR		C7006	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
175		B	CAPACITOR		C7007	1-100-552-21	ELECT CHIP 10UF 20% 25V		
176		B	CAPACITOR		C7008	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
177		B	CAPACITOR		C7009	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
178		B	CAPACITOR		C7010	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
179		B	CAPACITOR		C7011	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
180		B	CAPACITOR		C7012	1-110-648-11	ELECT CHIP 220UF 20.00% 25V		
181		B	CAPACITOR		C7013	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
182		B	CAPACITOR		C7014	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
183		B	CAPACITOR		C7015	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
184		B	CAPACITOR		C7016	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
185		B	CAPACITOR		C7017	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
186		B	CAPACITOR		C7023	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
187		B	CAPACITOR		C7025	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
188		B	CAPACITOR		C7026	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
189		B	CAPACITOR		C7027	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
190		B	CAPACITOR		C7028	1-112-794-11	ELECT CHIP 470UF 20% 16V		
191		B	CAPACITOR		C7030	1-112-794-11	ELECT CHIP 470UF 20% 16V		
192		B	CAPACITOR		C7031	1-165-673-21	ELECT CHIP 56UF 20% 10V		
193		B	CAPACITOR		C7032	1-165-673-21	ELECT CHIP 56UF 20% 10V		
194		B	CAPACITOR		C7034	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
195		B	CAPACITOR		C7035	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
196		B	CAPACITOR		C7036	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
197		B	CAPACITOR		C7037	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
198		B	CAPACITOR		C7040	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
199		B	CAPACITOR		C7041	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
200		B	CAPACITOR		C7042	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
201		B	CAPACITOR		C7045	1-131-661-21	ELECT CHIP 100UF 20% 10V		
202		B	CAPACITOR		C7047	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
203		B	CAPACITOR		C7051	1-135-595-11	ELECT CHIP 100UF 20% 6.3V		
204		B	CAPACITOR		C7052	1-165-673-21	ELECT CHIP 56UF 20% 10V		
205		B	CAPACITOR		C7054	1-100-597-91	CERAMIC CHIP 0.1UF 10% 25V		
206		B	CAPACITOR		C7056	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
207		B	CAPACITOR		C7057	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
208		B	CAPACITOR		C7058	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
209		B	CAPACITOR		C7100	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
210		B	CAPACITOR		C7101	1-110-648-11	ELECT CHIP 220UF 20.00% 25V		
211		B	CAPACITOR		C7525	1-164-937-11	CERAMIC CHIP 0.001UF 10.00% 50V		
212		B	CAPACITOR		C7545	1-164-937-11	CERAMIC CHIP 0.001UF 10.00% 50V		
213		B	CAPACITOR		C9002	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
214		B	CAPACITOR		C9003	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
215		B	CAPACITOR		C9005	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
216		B	CAPACITOR		C9007	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
217		B	CAPACITOR		C9008	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
218		B	CAPACITOR		C9009	1-100-567-81	CERAMIC CHIP 10000PF 10% 25V		
219		B	CAPACITOR		C9011	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
220		B	CAPACITOR		C9012	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
221		B	CAPACITOR		C9013	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
222		B	CAPACITOR		C9014	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
223		B	CAPACITOR		C9030	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
224		B	CAPACITOR		C9031	1-164-937-11	CERAMIC CHIP 0.001UF 10.00% 50V		
225		B	CAPACITOR		C9032	1-164-937-11	CERAMIC CHIP 0.001UF 10.00% 50V		
226		B	CAPACITOR		C9033	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
227		B	CAPACITOR		C9034	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
228		B	CAPACITOR		C9035	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
229		B	CAPACITOR		C9036	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
230		B	CAPACITOR		C9037	1-112-064-11	CERAMIC CHIP 2.2UF 10% 10V		
231		B	CAPACITOR		C9038	1-112-064-11	CERAMIC CHIP 2.2UF 10% 10V		
232		B	CAPACITOR		C9039	1-115-412-11	CERAMIC CHIP 680PF 5.00% 25V		
233		B	CAPACITOR		C9040	1-115-412-11	CERAMIC CHIP 680PF 5.00% 25V		
234		B	CAPACITOR		C9042	1-125-777-11	CERAMIC CHIP 0.1UF 10.00% 10V		
235		B	CONNECTOR		CN1001	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P		
236		B	CONNECTOR		CN1002	1-819-447-11	HEADER ASSEMBLY FOR PWB 10P		
237		B	CONNECTOR		CN1003	1-779-331-51	CONNECTOR, FFC/FPC 14P		
238		B	CONNECTOR		CN1004	1-779-936-51	CONNECTOR, FFC/FPC 18P		
239		B	CONNECTOR		CN1007	1-819-336-11	HEADER ASSEMBLY FOR PWB 3P		
240		B	CONNECTOR		CN1008	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		
241		B	CONNECTOR		CN1700	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		
242		B	CONNECTOR	*	CN1701	1-820-189-11	HEADER ASSEMBLY (PRINT PWB)12P		
243		B	CONNECTOR		CN4700	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P		
244		B	CONNECTOR	*	CN5000	1-820-235-11	HEADER ASSEMBLY 30P		
245		B	CONNECTOR		CN6000	1-818-937-11	D SUB CONNECTOR 15P		
246		B	CONNECTOR		CN7002	1-780-336-11	EARTH TERMINAL		
247		B	CONNECTOR		CN7003	1-780-336-11	EARTH TERMINAL		
248		B	CONNECTOR		CN7004	1-780-336-11	EARTH TERMINAL		
249		B	CONNECTOR		CN7005	1-780-336-11	EARTH TERMINAL		
250		B	CONNECTOR		CN7008	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P		
251		B	CONNECTOR		CN7009	1-820-184-11	HEADER ASSEMBLY (PRINT PWB) 7P		
252		B	CONNECTOR		CN9000	1-818-737-11	HDMI CONNECTOR		
253		B	DIODE		D1002	8-719-058-24	DIODE RB501V-40TE-17		
254		B	DIODE		D1006	8-719-081-97	DIODE MMDL914T1		
255		B	DIODE		D1007	8-719-077-59	DIODE 1PS302		
256		B	DIODE		D1020	8-719-036-94	DIODE RD5.6SB-T1		
257		B	DIODE		D1021	8-719-036-94	DIODE RD5.6SB-T1		
258		B	DIODE		D1701	8-719-064-03	DIODE HZU16B2TRF-E		
259		B	DIODE		D1702	8-719-064-03	DIODE HZU16B2TRF-E		
260		B	DIODE		D6000	8-719-036-94	DIODE RD5.6SB-T1		
261		B	DIODE		D6001	8-719-036-94	DIODE RD5.6SB-T1		
262		B	DIODE		D6002	8-719-036-94	DIODE RD5.6SB-T1		
263		B	DIODE		D6003	8-719-050-38	DIODE M1MA152WK-T1		
264		B	DIODE		D7000	8-719-081-97	DIODE MMDL914T1		
265		B	DIODE		D7001	6-501-336-01	DIODE RSX201L-30TE25		
266		B	DIODE		D7003	8-719-081-97	DIODE MMDL914T1		
267		B	DIODE		D7004	8-719-072-43	DIODE RB050L-40TE25		
268		B	DIODE		D7005	8-719-072-43	DIODE RB050L-40TE25		
269		B	DIODE		D7006	6-501-336-01	DIODE RSX201L-30TE25		
270		B	DIODE		D7008	6-500-579-01	DIODE PTZ-TE25-6.8B		
271		B	DIODE		D7009	8-719-073-69	DIODE PTZ-TE25-6.2A		
272		B	DIODE		D7010	8-719-056-83	DIODE UDZ-TE-17-6.8B		
273		B	DIODE		D7014	8-719-056-83	DIODE UDZ-TE-17-6.8B		
274		B	DIODE		D7500	8-719-056-84	DIODE UDZ-TE-17-7.5B		
275		B	DIODE		D7508	8-719-081-97	DIODE MMDL914T1		
276		B	DIODE		D7509	8-719-081-97	DIODE MMDL914T1		
277		B	DIODE		D7510	8-719-081-97	DIODE MMDL914T1		
278		B	DIODE		D9004	8-719-081-97	DIODE MMDL914T1		
279		B	DIODE		D9013	8-719-081-97	DIODE MMDL914T1		
280		B	DIODE		D9014	8-719-050-37	DIODE M1MA152WA-T1		
281		B	DIODE		D9015	8-719-081-97	DIODE MMDL914T1		
282		B	FUSE	△	F7000	1-576-603-21	FUSE 3.15A 24V		
283		B	FERRITE BEAD		FB1001	1-414-227-11	FERRITE 0UH		
284		B	FERRITE BEAD		FB1002	1-400-110-21	FERRITE 0UH		
285		B	FERRITE BEAD		FB1003	1-414-227-11	FERRITE 0UH		
286		B	FERRITE BEAD		FB1004	1-400-110-21	FERRITE 0UH		
287		B	FERRITE BEAD		FB1005	1-400-110-21	FERRITE 0UH		
288		B	FERRITE BEAD		FB1006	1-400-110-21	FERRITE 0UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
289		B	FERRITE BEAD		FB1007	1-400-110-21	FERRITE 0UH		
290		B	FERRITE BEAD		FB1711	1-500-113-22	FERRITE 0UH		
291		B	FERRITE BEAD		FB1712	1-400-110-21	FERRITE 0UH		
292		B	FERRITE BEAD		FB1713	1-400-110-21	FERRITE 0UH		
293		B	FERRITE BEAD		FB1715	1-400-110-21	FERRITE 0UH		
294		B	FERRITE BEAD		FB1720	1-400-141-22	FERRITE 0UH		
295		B	FERRITE BEAD		FB1721	1-400-141-22	FERRITE 0UH		
296		B	FERRITE BEAD		FB4701	1-400-851-11	FERRITE 0UH		
297		B	FERRITE BEAD		FB5201	1-400-794-21	FERRITE 0UH		
298		B	FERRITE BEAD		FB6000	1-469-100-21	FERRITE 0UH		
299		B	FERRITE BEAD		FB6001	1-469-100-21	FERRITE 0UH		
300		B	FERRITE BEAD		FB6002	1-469-100-21	FERRITE 0UH		
301		B	FERRITE BEAD		FB6004	1-469-100-21	FERRITE 0UH		
302		B	FERRITE BEAD		FB6005	1-400-141-22	FERRITE 0UH		
303		B	FERRITE BEAD		FB7001	1-414-445-11	FERRITE 0UH		
304		B	FERRITE BEAD		FB7002	1-414-445-11	FERRITE 0UH		
305		B	FERRITE BEAD		FB7003	1-414-445-11	FERRITE 0UH		
306		B	FERRITE BEAD		FB7005	1-400-110-21	FERRITE 0UH		
307		B	FERRITE BEAD		FB7006	1-400-110-21	FERRITE 0UH		
308		B	FERRITE BEAD		FB7007	1-400-110-21	FERRITE 0UH		
309		B	FERRITE BEAD		FB7008	1-400-110-21	FERRITE 0UH		
310		B	FERRITE BEAD		FB7011	1-400-794-21	FERRITE 0UH		
311		B	FERRITE BEAD		FB9000	1-469-094-21	FERRITE 0UH		
312		B	FILTER		FL1001	1-234-177-21	FERRITE 0UH		
313		B	FILTER		FL5201	1-234-177-21	FERRITE 0UH		
314		B	FILTER		FL5203	1-234-177-21	FERRITE 0UH		
315		B	FILTER		FL5206	1-234-177-21	FERRITE 0UH		
316		B	FILTER		FL5207	1-234-177-21	FERRITE 0UH		
317		B	FILTER		FL5500	1-234-177-21	FERRITE 0UH		
318		B	FILTER		FL5501	1-234-177-21	FERRITE 0UH		
319		B	FILTER		FL9000	1-234-177-21	FERRITE 0UH		
320		B	FILTER		FL9001	1-234-177-21	FERRITE 0UH		
321		B	IC		IC1001	6-708-219-01	IC MB91305PMC-G-BNDE1		
322		B	IC		IC1002	6-806-969-01	IC S29AL016D70TFI010-WAX2AU1		
323		B	IC		IC1004	6-703-175-01	IC PST3629UL		
324		B	IC		IC1005	6-710-121-01	IC M24256-BWMN6TP(A)		
325		B	IC		IC1006	6-709-512-01	IC S-1132B18-M5T1G		
326		B	IC		IC1007	6-706-815-01	IC TMP75AIDR		
327		B	IC		IC1008	8-759-549-03	IC SN74LV132APWR		
328		B	IC		IC1009	6-709-517-01	IC S-35390A-J8T1G		
329		B	IC		IC1010	8-759-460-79	IC BA09FP-E2		
330		B	IC		IC5201	8-759-651-59	IC SN74CBTLV3245APWR		
331		B	IC		IC5202	8-759-651-59	IC SN74CBTLV3245APWR		
332		B	IC		IC5203	6-706-491-01	IC TC7SH86FU(T5RSOYJF)		
333		B	IC		IC5500	6-707-822-01	IC EM6A9320BI-5MG		
334		B	IC		IC6000	6-704-600-01	IC M24C02-WMN6T(B)		
335		B	IC		IC6001	8-759-679-54	IC SN74LVC14APWR		
336		B	IC		IC7000	6-707-927-01	IC BD9775FV		
337		B	IC		IC7001	6-709-441-01	IC SI8008TM-TL		
338		B	IC		IC7002	6-709-441-01	IC SI8008TM-TL		
339		B	IC		IC7004	6-708-862-01	IC MM1662FTRE		
340		B	IC		IC7005	6-705-469-01	IC BA50BC0FP-E2		
341		B	IC		IC9000	6-704-819-01	IC CS4335-KSZR		
342		B	IC		IC9001	6-704-001-01	IC BR24L02F-WE2		
343		B	IC		IC9002	6-708-758-01	IC PCA9517DP.118		
344		B	IC	*	IC9711	6-703-108-01	IC SN74LVC2G04DCKR		
345		B	JACK		J6000	1-750-925-11	JACK (SMALL TYPE)		
346		B	COIL		L1002	1-400-794-21	FERRITE 0UH		
347		B	COIL		L5000	1-456-984-11	INDUCTOR 0UH		
348		B	COIL		L5001	1-456-984-11	INDUCTOR 0UH		
349		B	COIL		L5002	1-456-984-11	INDUCTOR 0UH		
350		B	COIL		L5003	1-456-984-11	INDUCTOR 0UH		
351		B	COIL		L5004	1-456-984-11	INDUCTOR 0UH		
352		B	COIL		L5005	1-400-177-21	FERRITE 0UH		
353		B	COIL		L5006	1-469-561-21	INDUCTOR 100UH		
354		B	COIL		L5201	1-400-794-21	FERRITE 0UH		
355		B	COIL		L5202	1-412-054-21	INDUCTOR 2.2UH		
356		B	COIL		L5203	1-469-551-21	INDUCTOR 2.2UH		
357		B	COIL		L5205	1-469-551-21	INDUCTOR 2.2UH		
358		B	COIL		L5206	1-469-551-21	INDUCTOR 2.2UH		
359		B	COIL		L5500	1-400-794-21	FERRITE 0UH		
360		B	COIL		L5501	1-400-794-21	FERRITE 0UH		
361		B	COIL		L7000	1-416-740-11	INDUCTOR 10UH		
362		B	COIL		L7001	1-457-041-21	INDUCTOR 10UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
363		B	COIL		L7002	1-481-081-11	INDUCTOR 47UH		
364		B	COIL		L7003	1-481-080-11	INDUCTOR 22UH		
365		B	COIL		L7004	1-481-083-11	INDUCTOR 22UH		
366		B	COIL		L7005	1-456-786-21	INDUCTOR 47UH		
367		B	COIL		L7006	1-412-056-11	INDUCTOR 4.7UH		
368		B	COIL		L7007	1-416-740-11	INDUCTOR 10UH		
369		B	COIL	*	L9000	1-813-308-11	INDUCTOR 0UH		
370		B	COIL	*	L9001	1-813-308-11	INDUCTOR 0UH		
371		B	COIL	*	L9002	1-813-308-11	INDUCTOR 0UH		
372		B	COIL	*	L9003	1-813-308-11	INDUCTOR 0UH		
373		B	COIL		L9004	1-469-555-21	INDUCTOR 10UH		
374		B	COIL		L9005	1-469-555-21	INDUCTOR 10UH		
375		B	IC LINK	△	PS6000	1-576-122-21	IC LINK 0.4A 72V		
376		B	IC LINK	△	PS7000	1-576-603-21	FUSE 3.15A 24V		
377		B	TRANSISTOR		Q1001	6-551-387-01	TRANSISTOR SSM6N16FU		
378		B	TRANSISTOR		Q1002	8-729-029-00	TRANSISTOR DTC115EUA-T106		
379		B	TRANSISTOR		Q1003	8-729-028-74	TRANSISTOR DTA114TUA-T106		
380		B	TRANSISTOR		Q1004	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		
381		B	TRANSISTOR		Q1005	8-729-028-74	TRANSISTOR DTA114TUA-T106		
382		B	TRANSISTOR		Q1006	8-729-029-04	TRANSISTOR DTC123JUA-T106		
383		B	TRANSISTOR		Q1007	8-729-028-96	TRANSISTOR DTC114EUA-T106		
384		B	TRANSISTOR		Q1700	6-551-387-01	TRANSISTOR SSM6N16FU		
385		B	TRANSISTOR		Q1701	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
386		B	TRANSISTOR		Q5000	8-729-602-36	TRANSISTOR 2SA1602-F		
387		B	TRANSISTOR		Q5001	8-729-602-36	TRANSISTOR 2SA1602-F		
388		B	TRANSISTOR		Q6000	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
389		B	TRANSISTOR		Q6001	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
390		B	TRANSISTOR		Q7000	8-729-046-04	TRANSISTOR FDS6690A		
391		B	TRANSISTOR		Q7001	6-550-828-01	TRANSISTOR RSQ035P03TR		
392		B	TRANSISTOR		Q7005	6-550-851-01	TRANSISTOR RSS050P03FTB		
393		B	TRANSISTOR		Q7006	8-729-029-00	TRANSISTOR DTC115EUA-T106		
394		B	TRANSISTOR		Q7007	8-729-602-21	TRANSISTOR 2SC4154-F		
395		B	TRANSISTOR		Q7008	8-729-028-96	TRANSISTOR DTC114EUA-T106		
396		B	TRANSISTOR	*	Q7009	6-550-663-01	TRANSISTOR RSS100N03TB		
397		B	TRANSISTOR		Q7500	8-729-028-96	TRANSISTOR DTC114EUA-T106		
398		B	TRANSISTOR		Q7502	8-729-028-96	TRANSISTOR DTC114EUA-T106		
399		B	TRANSISTOR		Q7503	8-729-028-96	TRANSISTOR DTC114EUA-T106		
400		B	TRANSISTOR		Q7504	8-729-028-96	TRANSISTOR DTC114EUA-T106		
401		B	TRANSISTOR		Q7505	8-729-028-96	TRANSISTOR DTC114EUA-T106		
402		B	TRANSISTOR		Q7506	8-729-028-96	TRANSISTOR DTC114EUA-T106		
403		B	TRANSISTOR		Q9000	8-729-028-96	TRANSISTOR DTC114EUA-T106		
404		B	TRANSISTOR		Q9001	8-729-025-28	TRANSISTOR 2SK1828		
405		B	TRANSISTOR		Q9003	8-729-028-96	TRANSISTOR DTC114EUA-T106		
406		B	TRANSISTOR		Q9004	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
407		B	TRANSISTOR		Q9005	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
408		B	TRANSISTOR		Q9006	8-729-028-96	TRANSISTOR DTC114EUA-T106		
409		B	TRANSISTOR		Q9007	6-551-364-01	TRANSISTOR DTC614TUT106		
410		B	TRANSISTOR		Q9008	6-551-364-01	TRANSISTOR DTC614TUT106		
411		B	TRANSISTOR		Q9009	8-729-600-22	TRANSISTOR 2SA1235-F		
412		B	TRANSISTOR		Q9010	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
413		B	RESISTOR		R1001	1-216-864-11	SHORT CHIP 0		
414		B	RESISTOR		R1002	1-218-990-81	SHORT CHIP 0		
415		B	RESISTOR		R1005	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
416		B	RESISTOR		R1007	1-216-864-11	SHORT CHIP 0		
417		B	RESISTOR		R1010	1-218-990-81	SHORT CHIP 0		
418		B	RESISTOR		R1011	1-216-864-11	SHORT CHIP 0		
419		B	RESISTOR		R1012	1-216-864-11	SHORT CHIP 0		
420		B	RESISTOR		R1013	1-216-801-11	METAL CHIP 22 5% 1/10W		
421		B	RESISTOR		R1014	1-216-801-11	METAL CHIP 22 5% 1/10W		
422		B	RESISTOR		R1015	1-216-864-11	SHORT CHIP 0		
423		B	RESISTOR		R1016	1-216-801-11	METAL CHIP 22 5% 1/10W		
424		B	RESISTOR		R1017	1-216-801-11	METAL CHIP 22 5% 1/10W		
425		B	RESISTOR		R1018	1-216-864-11	SHORT CHIP 0		
426		B	RESISTOR		R1019	1-216-864-11	SHORT CHIP 0		
427		B	RESISTOR		R1020	1-216-813-11	METAL CHIP 220 5% 1/10W		
428		B	RESISTOR		R1021	1-216-801-11	METAL CHIP 22 5% 1/10W		
429		B	RESISTOR		R1022	1-216-801-11	METAL CHIP 22 5% 1/10W		
430		B	RESISTOR		R1023	1-216-801-11	METAL CHIP 22 5% 1/10W		
431		B	RESISTOR		R1024	1-216-801-11	METAL CHIP 22 5% 1/10W		
432		B	RESISTOR		R1025	1-216-864-11	SHORT CHIP 0		
433		B	RESISTOR		R1026	1-216-801-11	METAL CHIP 22 5% 1/10W		
434		B	RESISTOR		R1027	1-400-591-22	FERRITE 0UH		
435		B	RESISTOR		R1031	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
436		B	RESISTOR		R1032	1-400-807-21	FERRITE 0UH		

No.	#	Board	Type	△/°	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
437		B	RESISTOR		R1034	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
438		B	RESISTOR		R1035	1-216-864-11	SHORT CHIP 0		
439		B	RESISTOR		R1036	1-218-965-11	RES-CHIP 10K 5% 1/16W		
440		B	RESISTOR		R1037	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
441		B	RESISTOR		R1038	1-218-965-11	RES-CHIP 10K 5% 1/16W		
442		B	RESISTOR		R1045	1-218-965-11	RES-CHIP 10K 5% 1/16W		
443		B	RESISTOR		R1046	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
444		B	RESISTOR		R1047	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
445		B	RESISTOR		R1048	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
446		B	RESISTOR		R1049	1-218-965-11	RES-CHIP 10K 5% 1/16W		
447		B	RESISTOR		R1052	1-218-941-81	RES-CHIP 100 5% 1/16W		
448		B	RESISTOR		R1053	1-218-990-81	SHORT CHIP 0		
449		B	RESISTOR		R1058	1-218-990-81	SHORT CHIP 0		
450		B	RESISTOR		R1061	1-218-965-11	RES-CHIP 10K 5% 1/16W		
451		B	RESISTOR		R1064	1-218-965-11	RES-CHIP 10K 5% 1/16W		
452		B	RESISTOR		R1065	1-218-965-11	RES-CHIP 10K 5% 1/16W		
453		B	RESISTOR		R1066	1-218-965-11	RES-CHIP 10K 5% 1/16W		
454		B	RESISTOR		R1070	1-216-864-11	SHORT CHIP 0		
455		B	RESISTOR		R1073	1-218-990-81	SHORT CHIP 0		
456		B	RESISTOR		R1075	1-218-965-11	RES-CHIP 10K 5% 1/16W		
457		B	RESISTOR		R1076	1-218-965-11	RES-CHIP 10K 5% 1/16W		
458		B	RESISTOR		R1078	1-218-990-81	SHORT CHIP 0		
459		B	RESISTOR		R1079	1-400-807-21	FERRITE 0UH		
460		B	RESISTOR		R1080	1-400-807-21	FERRITE 0UH		
461		B	RESISTOR		R1081	1-400-807-21	FERRITE 0UH		
462		B	RESISTOR		R1082	1-400-807-21	FERRITE 0UH		
463		B	RESISTOR		R1083	1-400-807-21	FERRITE 0UH		
464		B	RESISTOR		R1084	1-400-807-21	FERRITE 0UH		
465		B	RESISTOR		R1085	1-400-807-21	FERRITE 0UH		
466		B	RESISTOR		R1087	1-216-864-11	SHORT CHIP 0		
467		B	RESISTOR		R1101	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
468		B	RESISTOR		R1107	1-218-941-81	RES-CHIP 100 5% 1/16W		
469		B	RESISTOR		R1108	1-218-941-81	RES-CHIP 100 5% 1/16W		
470		B	RESISTOR		R1109	1-218-941-81	RES-CHIP 100 5% 1/16W		
471		B	RESISTOR		R1110	1-218-941-81	RES-CHIP 100 5% 1/16W		
472		B	RESISTOR		R1111	1-218-933-11	RES-CHIP 22 5% 1/16W		
473		B	RESISTOR		R1112	1-218-941-81	RES-CHIP 100 5% 1/16W		
474		B	RESISTOR		R1113	1-218-933-11	RES-CHIP 22 5% 1/16W		
475		B	RESISTOR		R1115	1-218-941-81	RES-CHIP 100 5% 1/16W		
476		B	RESISTOR		R1116	1-218-990-81	SHORT CHIP 0		
477		B	RESISTOR		R1117	1-218-941-81	RES-CHIP 100 5% 1/16W		
478		B	RESISTOR		R1119	1-218-941-81	RES-CHIP 100 5% 1/16W		
479		B	RESISTOR		R1122	1-216-864-11	SHORT CHIP 0		
480		B	RESISTOR		R1123	1-216-864-11	SHORT CHIP 0		
481		B	RESISTOR		R1124	1-216-864-11	SHORT CHIP 0		
482		B	RESISTOR		R1125	1-216-864-11	SHORT CHIP 0		
483		B	RESISTOR		R1138	1-218-965-11	RES-CHIP 10K 5% 1/16W		
484		B	RESISTOR		R1142	1-218-965-11	RES-CHIP 10K 5% 1/16W		
485		B	RESISTOR		R1144	1-208-691-11	METAL CHIP 2.2K 0.5% 1/16W		
486		B	RESISTOR		R1147	1-218-941-81	RES-CHIP 100 5% 1/16W		
487		B	RESISTOR		R1158	1-218-941-81	RES-CHIP 100 5% 1/16W		
488		B	RESISTOR		R1160	1-218-941-81	RES-CHIP 100 5% 1/16W		
489		B	RESISTOR		R1161	1-218-965-11	RES-CHIP 10K 5% 1/16W		
490		B	RESISTOR		R1162	1-218-973-11	RES-CHIP 47K 5% 1/16W		
491		B	RESISTOR		R1163	1-218-941-81	RES-CHIP 100 5% 1/16W		
492		B	RESISTOR		R1164	1-218-965-11	RES-CHIP 10K 5% 1/16W		
493		B	RESISTOR		R1165	1-218-965-11	RES-CHIP 10K 5% 1/16W		
494		B	RESISTOR		R1167	1-218-965-11	RES-CHIP 10K 5% 1/16W		
495		B	RESISTOR		R1168	1-218-965-11	RES-CHIP 10K 5% 1/16W		
496		B	RESISTOR		R1169	1-216-864-11	SHORT CHIP 0		
497		B	RESISTOR		R1170	1-400-794-21	FERRITE 0UH		
498		B	RESISTOR		R1180	1-218-965-11	RES-CHIP 10K 5% 1/16W		
499		B	RESISTOR		R1183	1-218-941-81	RES-CHIP 100 5% 1/16W		
500		B	RESISTOR		R1186	1-218-990-81	SHORT CHIP 0		
501		B	RESISTOR		R1188	1-218-990-81	SHORT CHIP 0		
502		B	RESISTOR		R1190	1-208-886-81	METAL CHIP 910 0.5% 1/16W		
503		B	RESISTOR		R1191	1-218-969-11	RES-CHIP 22K 5% 1/16W		
504		B	RESISTOR		R1192	1-218-941-81	RES-CHIP 100 5% 1/16W		
505		B	RESISTOR		R1193	1-218-965-11	RES-CHIP 10K 5% 1/16W		
506		B	RESISTOR		R1195	1-218-990-81	SHORT CHIP 0		
507		B	RESISTOR		R1196	1-218-965-11	RES-CHIP 10K 5% 1/16W		
508		B	RESISTOR		R1198	1-218-990-81	SHORT CHIP 0		
509		B	RESISTOR		R1199	1-218-941-81	RES-CHIP 100 5% 1/16W		
510		B	RESISTOR		R1200	1-218-990-81	SHORT CHIP 0		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
511		B	RESISTOR		R1202	1-218-965-11	RES-CHIP 10K 5% 1/16W		
512		B	RESISTOR		R1205	1-218-990-81	SHORT CHIP 0		
513		B	RESISTOR		R1206	1-218-965-11	RES-CHIP 10K 5% 1/16W		
514		B	RESISTOR		R1207	1-218-949-11	RES-CHIP 470 5% 1/16W		
515		B	RESISTOR		R1208	1-218-990-81	SHORT CHIP 0		
516		B	RESISTOR		R1209	1-218-990-81	SHORT CHIP 0		
517		B	RESISTOR		R1210	1-218-949-11	RES-CHIP 470 5% 1/16W		
518		B	RESISTOR		R1211	1-218-965-11	RES-CHIP 10K 5% 1/16W		
519		B	RESISTOR		R1212	1-218-949-11	RES-CHIP 470 5% 1/16W		
520		B	RESISTOR		R1218	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
521		B	RESISTOR		R1223	1-218-945-11	RES-CHIP 220 5% 1/16W		
522		B	RESISTOR		R1224	1-218-990-81	SHORT CHIP 0		
523		B	RESISTOR		R1225	1-218-937-11	RES-CHIP 47 5% 1/16W		
524		B	RESISTOR		R1226	1-216-813-11	METAL CHIP 220 5% 1/10W		
525		B	RESISTOR		R1227	1-218-937-11	RES-CHIP 47 5% 1/16W		
526		B	RESISTOR		R1235	1-216-864-11	SHORT CHIP 0		
527		B	RESISTOR		R1239	1-216-864-11	SHORT CHIP 0		
528		B	RESISTOR		R1240	1-216-849-11	METAL CHIP 220K 5% 1/10W		
529		B	RESISTOR		R1242	1-218-941-81	RES-CHIP 100 5% 1/16W		
530		B	RESISTOR		R1243	1-216-809-11	METAL CHIP 100 5% 1/10W		
531		B	RESISTOR		R1246	1-218-965-11	RES-CHIP 10K 5% 1/16W		
532		B	RESISTOR		R1247	1-216-864-11	SHORT CHIP 0		
533		B	RESISTOR		R1255	1-400-591-22	FERRITE 0UH		
534		B	RESISTOR		R1256	1-400-591-22	FERRITE 0UH		
535		B	RESISTOR		R1257	1-400-591-22	FERRITE 0UH		
536		B	RESISTOR		R1258	1-400-591-22	FERRITE 0UH		
537		B	RESISTOR		R1259	1-400-591-22	FERRITE 0UH		
538		B	RESISTOR		R1260	1-400-591-22	FERRITE 0UH		
539		B	RESISTOR		R1261	1-400-591-22	FERRITE 0UH		
540		B	RESISTOR		R1262	1-400-591-22	FERRITE 0UH		
541		B	RESISTOR		R1263	1-400-591-22	FERRITE 0UH		
542		B	RESISTOR		R1264	1-400-591-22	FERRITE 0UH		
543		B	RESISTOR		R1265	1-400-591-22	FERRITE 0UH		
544		B	RESISTOR		R1266	1-216-864-11	SHORT CHIP 0		
545		B	RESISTOR		R1267	1-400-591-22	FERRITE 0UH		
546		B	RESISTOR		R1270	1-218-941-81	RES-CHIP 100 5% 1/16W		
547		B	RESISTOR		R1290	1-218-990-81	SHORT CHIP 0		
548		B	RESISTOR		R1295	1-208-909-11	METAL CHIP 8.2K 0.5% 1/16W		
549		B	RESISTOR		R1701	1-216-864-11	SHORT CHIP 0		
550		B	RESISTOR		R1702	1-216-809-11	METAL CHIP 100 5% 1/10W		
551		B	RESISTOR		R1703	1-216-864-11	SHORT CHIP 0		
552		B	RESISTOR		R1705	1-218-965-11	RES-CHIP 10K 5% 1/16W		
553		B	RESISTOR		R1706	1-218-965-11	RES-CHIP 10K 5% 1/16W		
554		B	RESISTOR		R1709	1-218-965-11	RES-CHIP 10K 5% 1/16W		
555		B	RESISTOR		R1710	1-218-965-11	RES-CHIP 10K 5% 1/16W		
556		B	RESISTOR		R1721	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
557		B	RESISTOR		R1722	1-216-853-11	METAL CHIP 470K 5% 1/10W		
558		B	RESISTOR		R4702	1-216-864-11	SHORT CHIP 0		
559		B	RESISTOR		R4703	1-216-817-11	METAL CHIP 470 5% 1/10W		
560		B	RESISTOR		R4710	1-216-864-11	SHORT CHIP 0		
561		B	RESISTOR		R5000	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
562		B	RESISTOR		R5002	1-218-949-11	RES-CHIP 470 5% 1/16W		
563		B	RESISTOR		R5003	1-218-990-81	SHORT CHIP 0		
564		B	RESISTOR		R5004	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
565		B	RESISTOR		R5007	1-218-949-11	RES-CHIP 470 5% 1/16W		
566		B	RESISTOR		R5008	1-218-990-81	SHORT CHIP 0		
567		B	RESISTOR		R5009	1-218-989-11	RES-CHIP 1M 5% 1/16W		
568		B	RESISTOR		R5010	1-218-935-11	RES-CHIP 33 5% 1/16W		
569		B	RESISTOR		R5011	1-218-941-81	RES-CHIP 100 5% 1/16W		
570		B	RESISTOR		R5012	1-218-941-81	RES-CHIP 100 5% 1/16W		
571		B	RESISTOR		R5013	1-218-941-81	RES-CHIP 100 5% 1/16W		
572		B	RESISTOR		R5014	1-218-941-81	RES-CHIP 100 5% 1/16W		
573		B	RESISTOR		R5016	1-218-941-81	RES-CHIP 100 5% 1/16W		
574		B	RESISTOR		R5017	1-218-941-81	RES-CHIP 100 5% 1/16W		
575		B	RESISTOR		R5025	1-218-990-81	SHORT CHIP 0		
576		B	RESISTOR		R5026	1-216-864-11	SHORT CHIP 0		
577		B	RESISTOR		R5027	1-216-864-11	SHORT CHIP 0		
578		B	RESISTOR		R5029	1-218-965-11	RES-CHIP 10K 5% 1/16W		
579		B	RESISTOR		R5031	1-218-941-81	RES-CHIP 100 5% 1/16W		
580		B	RESISTOR		R5039	1-218-990-81	SHORT CHIP 0		
581		B	RESISTOR		R5040	1-218-990-81	SHORT CHIP 0		
582		B	RESISTOR		R5042	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
583		B	RESISTOR		R5043	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
584		B	RESISTOR		R5044	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
585		B	RESISTOR		R5045	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
586		B	RESISTOR		R5046	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
587		B	RESISTOR		R5047	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
588		B	RESISTOR		R5210	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
589		B	RESISTOR		R5211	1-218-990-81	SHORT CHIP 0		
590		B	RESISTOR		R5212	1-218-973-11	RES-CHIP 47K 5% 1/16W		
591		B	RESISTOR		R5214	1-218-933-11	RES-CHIP 22 5% 1/16W		
592		B	RESISTOR		R5215	1-218-933-11	RES-CHIP 22 5% 1/16W		
593		B	RESISTOR		R5218	1-216-864-11	SHORT CHIP 0		
594		B	RESISTOR		R5221	1-216-864-11	SHORT CHIP 0		
595		B	RESISTOR		R5222	1-216-864-11	SHORT CHIP 0		
596		B	RESISTOR		R5223	1-218-965-11	RES-CHIP 10K 5% 1/16W		
597		B	RESISTOR		R5224	1-218-990-81	SHORT CHIP 0		
598		B	RESISTOR		R5225	1-218-965-11	RES-CHIP 10K 5% 1/16W		
599		B	RESISTOR		R5226	1-218-965-11	RES-CHIP 10K 5% 1/16W		
600		B	RESISTOR		R5500	1-400-794-21	FERRITE 0UH		
601		B	RESISTOR		R5503	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
602		B	RESISTOR		R5504	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
603		B	RESISTOR		R5505	1-218-990-81	SHORT CHIP 0		
604		B	RESISTOR		R5506	1-211-986-11	METAL CHIP 51 0.5% 1/10W		
605		B	RESISTOR		R5507	1-218-990-81	SHORT CHIP 0		
606		B	RESISTOR		R5508	1-218-933-11	RES-CHIP 22 5% 1/16W		
607		B	RESISTOR		R5509	1-211-986-11	METAL CHIP 51 0.5% 1/10W		
608		B	RESISTOR		R5510	1-218-933-11	RES-CHIP 22 5% 1/16W		
609		B	RESISTOR		R5511	1-218-933-11	RES-CHIP 22 5% 1/16W		
610		B	RESISTOR		R5512	1-218-933-11	RES-CHIP 22 5% 1/16W		
611		B	RESISTOR		R5513	1-218-933-11	RES-CHIP 22 5% 1/16W		
612		B	RESISTOR		R5514	1-218-933-11	RES-CHIP 22 5% 1/16W		
613		B	RESISTOR		R5515	1-218-933-11	RES-CHIP 22 5% 1/16W		
614		B	RESISTOR		R5516	1-218-933-11	RES-CHIP 22 5% 1/16W		
615		B	RESISTOR		R5517	1-218-933-11	RES-CHIP 22 5% 1/16W		
616		B	RESISTOR		R5518	1-218-933-11	RES-CHIP 22 5% 1/16W		
617		B	RESISTOR		R5519	1-218-933-11	RES-CHIP 22 5% 1/16W		
618		B	RESISTOR		R6000	1-216-805-11	METAL CHIP 47 5% 1/10W		
619		B	RESISTOR		R6001	1-216-805-11	METAL CHIP 47 5% 1/10W		
620		B	RESISTOR		R6004	1-216-853-11	METAL CHIP 470K 5% 1/10W		
621		B	RESISTOR		R6005	1-216-853-11	METAL CHIP 470K 5% 1/10W		
622		B	RESISTOR		R6006	1-216-833-11	METAL CHIP 10K 5% 1/10W		
623		B	RESISTOR		R6007	1-216-821-11	METAL CHIP 1K 5% 1/10W		
624		B	RESISTOR		R6008	1-216-821-11	METAL CHIP 1K 5% 1/10W		
625		B	RESISTOR		R6009	1-216-833-11	METAL CHIP 10K 5% 1/10W		
626		B	RESISTOR		R6010	1-216-805-11	METAL CHIP 47 5% 1/10W		
627		B	RESISTOR		R6011	1-216-805-11	METAL CHIP 47 5% 1/10W		
628		B	RESISTOR		R6012	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
629		B	RESISTOR		R6013	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
630		B	RESISTOR		R6014	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
631		B	RESISTOR		R6015	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
632		B	RESISTOR		R6016	1-216-821-11	METAL CHIP 1K 5% 1/10W		
633		B	RESISTOR		R6017	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
634		B	RESISTOR		R6018	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
635		B	RESISTOR		R6019	1-216-845-11	METAL CHIP 100K 5% 1/10W		
636		B	RESISTOR		R6021	1-216-801-11	METAL CHIP 22 5% 1/10W		
637		B	RESISTOR		R6022	1-216-801-11	METAL CHIP 22 5% 1/10W		
638		B	RESISTOR		R6023	1-216-801-11	METAL CHIP 22 5% 1/10W		
639		B	RESISTOR		R6029	1-218-933-11	RES-CHIP 22 5% 1/16W		
640		B	RESISTOR		R6030	1-218-933-11	RES-CHIP 22 5% 1/16W		
641		B	RESISTOR		R6041	1-216-847-11	METAL CHIP 150K 5% 1/10W		
642		B	RESISTOR		R6042	1-216-847-11	METAL CHIP 150K 5% 1/10W		
643		B	RESISTOR		R6043	1-216-847-11	METAL CHIP 150K 5% 1/10W		
644		B	RESISTOR		R6044	1-216-847-11	METAL CHIP 150K 5% 1/10W		
645		B	RESISTOR		R6045	1-216-821-11	METAL CHIP 1K 5% 1/10W		
646		B	RESISTOR		R6046	1-216-821-11	METAL CHIP 1K 5% 1/10W		
647		B	RESISTOR		R7000	1-218-877-11	METAL CHIP 18K 0.5% 1/10W		
648		B	RESISTOR		R7001	1-218-877-11	METAL CHIP 18K 0.5% 1/10W		
649		B	RESISTOR		R7002	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
650		B	RESISTOR		R7003	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
651		B	RESISTOR		R7004	1-216-841-11	METAL CHIP 47K 5% 1/10W		
652		B	RESISTOR		R7005	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
653		B	RESISTOR		R7006	1-218-891-11	METAL CHIP 68K 0.5% 1/10W		
654		B	RESISTOR		R7007	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W		
655		B	RESISTOR		R7008	1-218-894-11	METAL CHIP 91K 0.5% 1/10W		
656		B	RESISTOR		R7009	1-216-841-11	METAL CHIP 47K 5% 1/10W		
657		B	RESISTOR		R7010	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
658		B	RESISTOR		R7011	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
659		B	RESISTOR		R7012	1-216-835-11	METAL CHIP 15K 5% 1/10W		
660		B	RESISTOR		R7013	1-218-882-11	METAL CHIP 30K 0.5% 1/10W		
661		B	RESISTOR		R7014	1-216-809-11	METAL CHIP 100 5% 1/10W		
662		B	RESISTOR		R7015	1-216-809-11	METAL CHIP 100 5% 1/10W		
663		B	RESISTOR		R7016	1-216-821-11	METAL CHIP 1K 5% 1/10W		
664		B	RESISTOR		R7017	1-216-815-11	METAL CHIP 330 5% 1/10W		
665		B	RESISTOR		R7019	1-216-835-11	METAL CHIP 15K 5% 1/10W		
666		B	RESISTOR		R7020	1-216-864-11	SHORT CHIP 0		
667		B	RESISTOR		R7021	1-216-837-11	METAL CHIP 22K 5% 1/10W		
668		B	RESISTOR		R7022	1-216-864-11	SHORT CHIP 0		
669		B	RESISTOR		R7023	1-216-864-11	SHORT CHIP 0		
670		B	RESISTOR		R7024	1-216-837-11	METAL CHIP 22K 5% 1/10W		
671		B	RESISTOR		R7025	1-216-864-11	SHORT CHIP 0		
672		B	RESISTOR		R7026	1-216-864-11	SHORT CHIP 0		
673		B	RESISTOR		R7027	1-216-821-11	METAL CHIP 1K 5% 1/10W		
674		B	RESISTOR		R7028	1-216-821-11	METAL CHIP 1K 5% 1/10W		
675		B	RESISTOR		R7029	1-216-841-11	METAL CHIP 47K 5% 1/10W		
676		B	RESISTOR		R7030	1-216-841-11	METAL CHIP 47K 5% 1/10W		
677		B	RESISTOR		R7031	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
678		B	RESISTOR		R7032	1-218-843-11	METAL CHIP 680 0.5% 1/10W		
679		B	RESISTOR		R7035	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
680		B	RESISTOR		R7036	1-218-845-11	METAL CHIP 820 0.5% 1/10W		
681		B	RESISTOR		R7040	1-216-295-91	SHORT CHIP 0		
682		B	RESISTOR		R7041	1-400-794-21	FERRITE 0UH		
683		B	RESISTOR		R7045	1-216-295-91	SHORT CHIP 0		
684		B	RESISTOR		R7046	1-216-295-91	SHORT CHIP 0		
685		B	RESISTOR		R7048	1-216-295-91	SHORT CHIP 0		
686		B	RESISTOR		R7050	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
687		B	RESISTOR		R7051	1-218-839-11	METAL CHIP 470 0.5% 1/10W		
688		B	RESISTOR		R7053	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
689		B	RESISTOR		R7054	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
690		B	RESISTOR		R7055	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
691		B	RESISTOR		R7056	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
692		B	RESISTOR		R7057	1-216-843-11	METAL CHIP 68K 5% 1/10W		
693		B	RESISTOR		R7058	1-216-851-11	METAL CHIP 330K 5% 1/10W		
694		B	RESISTOR		R7060	1-216-833-11	METAL CHIP 10K 5% 1/10W		
695		B	RESISTOR		R7063	1-216-833-11	METAL CHIP 10K 5% 1/10W		
696		B	RESISTOR		R7064	1-216-864-11	SHORT CHIP 0		
697		B	RESISTOR		R7066	1-216-835-11	METAL CHIP 15K 5% 1/10W		
698		B	RESISTOR		R7067	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
699		B	RESISTOR		R7080	1-400-591-22	FERRITE 0UH		
700		B	RESISTOR		R7081	1-400-591-22	FERRITE 0UH		
701		B	RESISTOR		R7082	1-400-591-22	FERRITE 0UH		
702		B	RESISTOR		R7083	1-400-591-22	FERRITE 0UH		
703		B	RESISTOR		R7506	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
704		B	RESISTOR		R7507	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
705		B	RESISTOR		R7510	1-216-864-11	SHORT CHIP 0		
706		B	RESISTOR		R7515	1-216-845-11	METAL CHIP 100K 5% 1/10W		
707		B	RESISTOR		R7516	1-216-844-11	METAL CHIP 82K 5% 1/10W		
708		B	RESISTOR		R7517	1-216-845-11	METAL CHIP 100K 5% 1/10W		
709		B	RESISTOR		R7518	1-216-847-11	METAL CHIP 150K 5% 1/10W		
710		B	RESISTOR		R7542	1-218-965-11	RES-CHIP 10K 5% 1/16W		
711		B	RESISTOR		R7543	1-218-965-11	RES-CHIP 10K 5% 1/16W		
712		B	RESISTOR		R7544	1-218-965-11	RES-CHIP 10K 5% 1/16W		
713		B	RESISTOR		R7545	1-218-977-11	RES-CHIP 100K 5% 1/16W		
714		B	RESISTOR		R7546	1-218-965-11	RES-CHIP 10K 5% 1/16W		
715		B	RESISTOR		R9001	1-216-805-11	METAL CHIP 47 5% 1/10W		
716		B	RESISTOR		R9002	1-216-805-11	METAL CHIP 47 5% 1/10W		
717		B	RESISTOR		R9003	1-216-805-11	METAL CHIP 47 5% 1/10W		
718		B	RESISTOR		R9004	1-216-805-11	METAL CHIP 47 5% 1/10W		
719		B	RESISTOR		R9005	1-218-929-11	RES-CHIP 10 5% 1/16W		
720		B	RESISTOR		R9006	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
721		B	RESISTOR		R9007	1-218-990-81	SHORT CHIP 0		
722		B	RESISTOR		R9008	1-218-990-81	SHORT CHIP 0		
723		B	RESISTOR		R9009	1-218-990-81	SHORT CHIP 0		
724		B	RESISTOR		R9010	1-216-864-11	SHORT CHIP 0		
725		B	RESISTOR		R9011	1-216-853-11	METAL CHIP 470K 5% 1/10W		
726		B	RESISTOR		R9012	1-216-853-11	METAL CHIP 470K 5% 1/10W		
727		B	RESISTOR		R9013	1-208-911-11	METAL CHIP 10K 0.5% 1/16W		
728		B	RESISTOR		R9014	1-216-864-11	SHORT CHIP 0		
729		B	RESISTOR		R9015	1-216-821-11	METAL CHIP 1K 5% 1/10W		
730		B	RESISTOR		R9016	1-216-821-11	METAL CHIP 1K 5% 1/10W		
731		B	RESISTOR		R9017	1-218-941-81	RES-CHIP 100 5% 1/16W		
732		B	RESISTOR		R9018	1-218-941-81	RES-CHIP 100 5% 1/16W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
733		B	RESISTOR		R9019	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
734		B	RESISTOR		R9020	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
735		B	RESISTOR		R9022	1-218-973-11	RES-CHIP 47K 5% 1/16W		
736		B	RESISTOR		R9025	1-218-941-81	RES-CHIP 100 5% 1/16W		
737		B	RESISTOR		R9031	1-218-929-11	RES-CHIP 10 5% 1/16W		
738		B	RESISTOR		R9032	1-218-929-11	RES-CHIP 10 5% 1/16W		
739		B	RESISTOR		R9033	1-218-929-11	RES-CHIP 10 5% 1/16W		
740		B	RESISTOR		R9034	1-218-929-11	RES-CHIP 10 5% 1/16W		
741		B	RESISTOR		R9035	1-218-929-11	RES-CHIP 10 5% 1/16W		
742		B	RESISTOR		R9036	1-218-929-11	RES-CHIP 10 5% 1/16W		
743		B	RESISTOR		R9037	1-218-929-11	RES-CHIP 10 5% 1/16W		
744		B	RESISTOR		R9038	1-218-929-11	RES-CHIP 10 5% 1/16W		
745		B	RESISTOR		R9040	1-218-965-11	RES-CHIP 10K 5% 1/16W		
746		B	RESISTOR		R9041	1-218-965-11	RES-CHIP 10K 5% 1/16W		
747		B	RESISTOR		R9044	1-218-937-11	RES-CHIP 47 5% 1/16W		
748		B	RESISTOR		R9045	1-218-937-11	RES-CHIP 47 5% 1/16W		
749		B	RESISTOR		R9046	1-218-937-11	RES-CHIP 47 5% 1/16W		
750		B	RESISTOR		R9047	1-216-295-91	SHORT CHIP 0		
751		B	RESISTOR		R9048	1-218-937-11	RES-CHIP 47 5% 1/16W		
752		B	RESISTOR		R9051	1-218-937-11	RES-CHIP 47 5% 1/16W		
753		B	RESISTOR		R9060	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
754		B	RESISTOR		R9061	1-218-957-11	RES-CHIP 2.2K 5% 1/16W		
755		B	RESISTOR		R9062	1-216-847-11	METAL CHIP 150K 5% 1/10W		
756		B	RESISTOR		R9063	1-216-847-11	METAL CHIP 150K 5% 1/10W		
757		B	RESISTOR		R9064	1-216-821-11	METAL CHIP 1K 5% 1/10W		
758		B	RESISTOR		R9065	1-216-847-11	METAL CHIP 150K 5% 1/10W		
759		B	RESISTOR		R9066	1-216-847-11	METAL CHIP 150K 5% 1/10W		
760		B	RESISTOR		R9067	1-216-821-11	METAL CHIP 1K 5% 1/10W		
761		B	RESISTOR		R9070	1-218-953-11	RES-CHIP 1K 5% 1/16W		
762		B	RESISTOR		R9071	1-218-973-11	RES-CHIP 47K 5% 1/16W		
763		B	RESISTOR		R9072	1-218-973-11	RES-CHIP 47K 5% 1/16W		
764		B	RESISTOR		R9073	1-218-973-11	RES-CHIP 47K 5% 1/16W		
765		B	RESISTOR		R9074	1-218-969-11	RES-CHIP 22K 5% 1/16W		
766		B	RESISTOR		R9075	1-218-989-11	RES-CHIP 1M 5% 1/16W		
767		B	RESISTOR		R9076	1-218-973-11	RES-CHIP 47K 5% 1/16W		
768		B	RESISTOR		R9944	1-216-295-91	SHORT CHIP 0		
769		B	NETWORK		RB1004	1-234-372-11	RES, NETWORK 100 (1005X4)		
770		B	NETWORK		RB1005	1-234-372-11	RES, NETWORK 100 (1005X4)		
771		B	NETWORK		RB1006	1-234-372-11	RES, NETWORK 100 (1005X4)		
772		B	NETWORK		RB1007	1-234-378-21	RES, NETWORK 10K (1005X4)		
773		B	NETWORK		RB1008	1-234-378-21	RES, NETWORK 10K (1005X4)		
774		B	NETWORK		RB5201	1-234-372-11	RES, NETWORK 100 (1005X4)		
775		B	NETWORK		RB5202	1-234-372-11	RES, NETWORK 100 (1005X4)		
776		B	NETWORK		RB5203	1-234-372-11	RES, NETWORK 100 (1005X4)		
777		B	NETWORK		RB5500	1-234-370-21	RES, NETWORK 22 (1005X4)		
778		B	NETWORK		RB5501	1-234-370-21	RES, NETWORK 22 (1005X4)		
779		B	NETWORK		RB5502	1-234-370-21	RES, NETWORK 22 (1005X4)		
780		B	NETWORK		RB5503	1-234-370-21	RES, NETWORK 22 (1005X4)		
781		B	NETWORK		RB5504	1-234-370-21	RES, NETWORK 22 (1005X4)		
782		B	NETWORK		RB5505	1-234-370-21	RES, NETWORK 22 (1005X4)		
783		B	NETWORK		RB5506	1-234-370-21	RES, NETWORK 22 (1005X4)		
784		B	NETWORK		RB5507	1-234-370-21	RES, NETWORK 22 (1005X4)		
785		B	NETWORK		RB5508	1-234-370-21	RES, NETWORK 22 (1005X4)		
786		B	NETWORK		RB5509	1-234-370-21	RES, NETWORK 22 (1005X4)		
787		B	NETWORK		RB5510	1-234-370-21	RES, NETWORK 22 (1005X4)		
788		B	NETWORK		RB5511	1-234-370-21	RES, NETWORK 22 (1005X4)		
789		B	VARISTOR		VD6000	1-802-078-11	VARISTOR (SMD)		
790		B	VARISTOR		VD6001	1-802-078-11	VARISTOR (SMD)		
791		B	VARISTOR		VD6002	1-802-078-11	VARISTOR (SMD)		
792		B	VARISTOR		VD6003	1-802-078-11	VARISTOR (SMD)		
793		B	VARISTOR		VD6004	1-802-078-11	VARISTOR (SMD)		
794		B	VARISTOR		VD6005	1-802-078-11	VARISTOR (SMD)		
795		B	VARISTOR		VD6006	1-802-078-11	VARISTOR (SMD)		
796		B	VARISTOR		VD9001	1-802-078-11	VARISTOR (SMD)		
797		B	VARISTOR		VD9002	1-802-078-11	VARISTOR (SMD)		
798		B	VARISTOR		VD9003	6-500-701-01	DIODE PGB1010603NR		
799		B	VARISTOR		VD9004	6-500-701-01	DIODE PGB1010603NR		
800		B	VARISTOR		VD9005	6-500-701-01	DIODE PGB1010603NR		
801		B	VARISTOR		VD9006	6-500-701-01	DIODE PGB1010603NR		
802		B	VARISTOR		VD9007	6-500-701-01	DIODE PGB1010603NR		
803		B	VARISTOR		VD9008	6-500-701-01	DIODE PGB1010603NR		
804		B	VARISTOR		VD9010	6-500-701-01	DIODE PGB1010603NR		
805		B	VARISTOR		VD9011	6-500-701-01	DIODE PGB1010603NR		
806		B	VARISTOR		VD9012	6-500-701-01	DIODE PGB1010603NR		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
807		B	VARIATOR		VD9013	6-500-701-01	DIODE PGB1010603NR		
808		B	CRYSTAL		X1001	1-813-070-21	PIEZOELECTRIC OSCILLATOR		
809		B	CRYSTAL		X1009	1-813-784-21	VIBRATOR, CRYSTAL		
810		B	CRYSTAL		X5000	1-813-773-11	VIBRATOR, CRYSTAL		
811		TUG	CAPACITOR		C3805	1-128-407-11	ELECT CHIP 47UF 20% 50V		
812		TUG	CAPACITOR		C3806	1-126-197-11	ELECT CHIP 10UF 20.00% 50V		
813		TUG	CAPACITOR		C3807	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
814		TUG	CAPACITOR		C3808	1-162-921-11	CERAMIC CHIP 33PF 5.00% 50V		
815		TUG	CAPACITOR		C3809	1-127-931-21	ELECT CHIP 470UF 20% 16V		
816		TUG	CAPACITOR		C3810	1-162-921-11	CERAMIC CHIP 33PF 5.00% 50V		
817		TUG	CAPACITOR		C3815	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
818		TUG	CAPACITOR		C3816	1-128-992-21	ELECT CHIP 47UF 20% 25V		
819		TUG	CAPACITOR		C3817	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
820		TUG	CAPACITOR		C3818	1-128-992-21	ELECT CHIP 47UF 20% 25V		
821		TUG	CAPACITOR		C3819	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
822		TUG	CAPACITOR		C3820	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
823		TUG	CAPACITOR		C3821	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
824		TUG	CAPACITOR		C3822	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
825		TUG	CAPACITOR		C3901	1-162-925-11	CERAMIC CHIP 68PF 5.00% 50V		
826		TUG	CAPACITOR		C3902	1-162-925-11	CERAMIC CHIP 68PF 5.00% 50V		
827		TUG	CAPACITOR		C3904	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
828		TUG	CAPACITOR		C3905	1-162-921-11	CERAMIC CHIP 33PF 5.00% 50V		
829		TUG	CONNECTOR		CN3802	1-819-339-11	HEADER ASSEMBLY FOR PWB 12P		
830		TUG	CONNECTOR		CN3803	1-819-476-11	HEADER ASSEMBLY FOR PWB 8P		
831		TUG	CONNECTOR		CN3903	1-819-337-11	HEADER ASSEMBLY FOR PWB 10P		
832		TUG	CONNECTOR		CN3904	1-819-474-11	HEADER ASSEMBLY FOR PWB 6P		
833		TUG	CONNECTOR		CN3905	1-695-915-11	TAB (CONTACT)		
834		TUG	CONNECTOR		CN3906	1-780-336-11	EARTH TERMINAL		
835		TUG	CONNECTOR		CN3907	1-780-336-11	EARTH TERMINAL		
836		TUG	CONNECTOR		CN3908	1-780-336-11	EARTH TERMINAL		
837		TUG	CONNECTOR		CN3909	1-780-336-11	EARTH TERMINAL		
838		TUG	FERRITE BEAD		FB3801	1-469-775-21	FERRITE 0UH		
839		TUG	FERRITE BEAD		FB3802	1-469-775-21	FERRITE 0UH		
840		TUG	FERRITE BEAD		FB3901	1-414-760-21	FERRITE 0UH		
841		TUG	FERRITE BEAD		FB3902	1-414-760-21	FERRITE 0UH		
842		TUG	FERRITE BEAD		FB3903	1-469-324-21	FERRITE 0UH		
843		TUG	FERRITE BEAD		FB3904	1-469-324-21	FERRITE 0UH		
844		TUG	IC		IC3802	6-705-469-01	IC BA50BC0FP-E2		
845		TUG	JUMPER READ		JR3801	1-216-295-91	SHORT CHIP 0		
846		TUG	COIL		L3802	1-412-058-11	INDUCTOR 10UH		
847		TUG	COIL		L3803	1-412-058-11	INDUCTOR 10UH		
848		TUG	COIL		L3806	1-412-052-21	INDUCTOR 1UH		
849		TUG	COIL		L3807	1-412-052-21	INDUCTOR 1UH		
850		TUG	COIL		L3901	1-414-580-21	INDUCTOR 100NH		
851		TUG	COIL		L3902	1-414-580-21	INDUCTOR 100NH		
852		TUG	COIL		L3903	1-414-580-21	INDUCTOR 100NH		
853		TUG	COIL		L3904	1-412-979-21	INDUCTOR 1UH		
854		TUG	COIL		L3905	1-414-580-21	INDUCTOR 100NH		
855		TUG	TRANSISTOR		Q3901	8-729-027-43	TRANSISTOR DTC114EKA-T146		
856		TUG	RESISTOR		R3804	1-216-864-11	SHORT CHIP 0		
857		TUG	RESISTOR		R3805	1-216-295-91	SHORT CHIP 0		
858		TUG	RESISTOR		R3807	1-216-864-11	SHORT CHIP 0		
859		TUG	RESISTOR		R3809	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
860		TUG	RESISTOR		R3810	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
861		TUG	RESISTOR		R3901	1-216-809-11	METAL CHIP 100 5% 1/10W		
862		TUG	RESISTOR		R3902	1-216-809-11	METAL CHIP 100 5% 1/10W		
863		TUG	RESISTOR		R3905	1-216-864-11	SHORT CHIP 0		
864		TUG	RESISTOR		R3906	1-216-864-11	SHORT CHIP 0		
865		TUG	RESISTOR		R3907	1-218-907-11	METAL CHIP 330K 0.5% 1/10W		
866		TUG	RESISTOR		R3908	1-216-864-11	SHORT CHIP 0		
867		TUG	RESISTOR		R3909	1-216-837-11	METAL CHIP 22K 5% 1/10W		
868		TUG	RESISTOR		R3910	1-216-833-11	METAL CHIP 10K 5% 1/10W		
869		TUG	RESISTOR		R3912	1-216-864-11	SHORT CHIP 0		
870		TUG	TUNER		TU3900	8-597-536-01	TUNER, FSS BTF-BG413Z		
871		G2A	CAPACITOR		C6000	1-161-964-91	CERAMIC 0.0047UF 250V	40/46V2000	
872		G2A	CAPACITOR		C6001	1-119-892-51	CERAMIC 470PF 10.00% 250V	40/46V2000	
873		G2A	CAPACITOR		C6002	1-165-531-11	MYLAR 1UF 10 275V	40/46V2000	
874		G2A	CAPACITOR		C6003	1-161-964-91	CERAMIC 0.0047UF 250V	40/46V2000	
875		G2A	CAPACITOR		C6004	1-165-529-11	MYLAR 0.22UF 10 275V	40/46V2000	
876		G2A	CAPACITOR		C6005	1-119-892-51	CERAMIC 470PF 10.00% 250V	40/46V2000	
877		G2A	CAPACITOR		C6006	1-135-361-11	ELECT(BLOCK) 180UF 20% 450V	40/46V2000	
878		G2A	CAPACITOR		C6008	1-135-361-11	ELECT(BLOCK) 180UF 20% 450V	40/46V2000	
879		G2A	CAPACITOR		C6010	1-113-889-11	CERAMIC 0.001UF 20.00% 250V	40/46V2000	
880		G2A	CAPACITOR		C6012	1-113-889-11	CERAMIC 0.001UF 20.00% 250V	40/46V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
881		G2A	CAPACITOR		C6015	1-113-889-11	CERAMIC 0.001UF 20.00% 250V	40/46V2000	
882		G2A	CAPACITOR		C6016	1-113-889-11	CERAMIC 0.001UF 20.00% 250V	40/46V2000	
883		G2A	CAPACITOR		C6051	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	40/46V2000	
884		G2A	CAPACITOR		C6100	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	40/46V2000	
885		G2A	CAPACITOR		C6101	1-107-905-11	ELECT 4.7UF 20% 50V	40/46V2000	
886		G2A	CAPACITOR		C6102	1-107-910-11	ELECT CHIP 100UF 20% 50V	40/46V2000	
887		G2A	CAPACITOR		C6103	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	40/46V2000	
888		G2A	CAPACITOR		C6104	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V	40/46V2000	
889		G2A	CAPACITOR		C6105	1-107-906-11	ELECT 10UF 20% 50V	40/46V2000	
890		G2A	CAPACITOR		C6108	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	40/46V2000	
891		G2A	CAPACITOR		C6109	1-107-888-11	ELECT 47UF 20% 25V	40/46V2000	
892		G2A	CAPACITOR		C6111	1-162-134-11	CERAMIC 470PF 10.00% 2KV	40/46V2000	
893		G2A	CAPACITOR		C6112	1-100-310-11	FILM 18000PF 3% 800V	40/46V2000	
894		G2A	CAPACITOR		C6116	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V	40/46V2000	
895		G2A	CAPACITOR		C6200	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	40/46V2000	
896		G2A	CAPACITOR		C6202	1-112-242-21	ELECT 1500UF 20% 25V	40/46V2000	
897		G2A	CAPACITOR		C6203	1-107-907-11	ELECT 22UF 20% 50V	40/46V2000	
898		G2A	CAPACITOR		C6204	1-112-242-21	ELECT 1500UF 20% 25V	40/46V2000	
899		G2A	CAPACITOR		C6205	1-112-242-21	ELECT 1500UF 20% 25V	40/46V2000	
900		G2A	CAPACITOR		C6207	1-112-242-21	ELECT 1500UF 20% 25V	40/46V2000	
901		G2A	CAPACITOR		C6216	1-107-928-11	ELECT 4.7UF 20% 100V	40/46V2000	
902		G2A	CAPACITOR		C6217	1-112-229-21	ELECT 1500UF 20% 16V	40/46V2000	
903		G2A	CAPACITOR		C6305	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	40/46V2000	
904		G2A	CAPACITOR		C6306	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V	40/46V2000	
905		G2A	CAPACITOR		C6307	1-107-903-11	ELECT 2.2UF 20% 50V	40/46V2000	
906		G2A	CAPACITOR		C6308	1-107-904-11	ELECT 3.3UF 20% 50V	40/46V2000	
907		G2A	CAPACITOR		C6309	1-107-910-11	ELECT 100UF 20% 50V	40/46V2000	
908		G2A	CAPACITOR		C6310	1-100-139-31	FILM 0.001UF 5% 630V	40/46V2000	
909		G2A	CAPACITOR		C6314	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	40/46V2000	
910		G2A	CAPACITOR		C6315	1-165-729-31	ELECT 470UF 20% 16V	40/46V2000	
911		G2A	CAPACITOR		C6316	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	40/46V2000	
912		G2A	CAPACITOR		C6401	1-107-882-91	ELECT 100UF 20% 16V	40/46V2000	
913		G2A	CAPACITOR		C6402	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	40/46V2000	
914		G2A	CAPACITOR		C6404	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	40/46V2000	
915		G2A	CAPACITOR		C6405	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	40/46V2000	
916		G2A	CAPACITOR		C6406	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	40/46V2000	
917		G2A	CAPACITOR		C6407	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	40/46V2000	
918		G2A	CAPACITOR		C6408	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	40/46V2000	
919		G2A	CAPACITOR		C6409	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	40/46V2000	
920		G2A	CAPACITOR		C6412	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	40/46V2000	
921		G2A	CAPACITOR		C6413	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	40/46V2000	
922		G2A	CAPACITOR		C6451	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	40/46V2000	
923		G2A	CAPACITOR		C6454	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	40/46V2000	
924		G2A	CAPACITOR		C6504	1-162-134-11	CERAMIC 470PF 10.00% 2KV	40/46V2000	
925		G2A	CAPACITOR		C6505	1-162-134-11	CERAMIC 470PF 10.00% 2KV	40/46V2000	
926		G2A	CAPACITOR		C6507	1-107-888-11	ELECT 47UF 20% 25V	40/46V2000	
927		G2A	CAPACITOR		C6517	1-117-227-11	MYLAR 1UF 10.00% 450V	40/46V2000	
928		G2A	CAPACITOR		C6518	1-112-744-52	MYLAR 1UF 10% 450V	40/46V2000	
929		G2A	CAPACITOR		C6519	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V	40/46V2000	
930		G2A	CAPACITOR		C6520	1-117-227-11	MYLAR 1UF 10.00% 450V	40/46V2000	
931		G2A	CAPACITOR		C6521	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V	40/46V2000	
932		G2A	CAPACITOR		C6522	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	40/46V2000	
933		G2A	CAPACITOR		C6523	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	40/46V2000	
934		G2A	CAPACITOR		C6525	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	40/46V2000	
935		G2A	CAPACITOR		C6526	1-107-906-11	ELECT 10UF 20% 50V	40/46V2000	
936		G2A	CONNECTOR		CN6000	1-695-915-11	TAB (CONTACT)	40/46V2000	
937		G2A	CONNECTOR	*	CN6001	1-793-660-11	PIN, CONNECTOR (PC BOARD) 3P	40/46V2000	
938		G2A	CONNECTOR		CN6011	1-537-770-21	TERMINAL BOARD, GROUND	40/46V2000	
939		G2A	CONNECTOR	*	CN6200	1-793-236-11	PIN, CONNECTOR (PC BOARD) 14P	40/46V2000	
940		G2A	CONNECTOR	*	CN6202	1-785-708-11	PIN, CONNECTOR (PC BOARD) 12P	40/46V2000	
941		G2A	CONNECTOR	*	CN6204	1-785-706-11	PIN, CONNECTOR (PC BOARD) 10P	40/46V2000	
942		G2A	CONNECTOR		CN6206	1-695-915-11	TAB (CONTACT)	40/46V2000	
943		G2A	CONNECTOR		CN6207	1-695-915-11	TAB (CONTACT)	40/46V2000	
944		G2A	CONNECTOR		CN6211	1-537-770-21	TERMINAL BOARD, GROUND	40/46V2000	
945		G2A	CONNECTOR		CN6214	1-537-770-21	TERMINAL BOARD, GROUND	40/46V2000	
946		G2A	CONNECTOR		CN6216	1-537-770-21	TERMINAL BOARD, GROUND	40/46V2000	
947		G2A	CONNECTOR	*	CN6217	1-785-701-11	PIN, CONNECTOR (PC BOARD) 3P	40/46V2000	
948		G2A	DIODE		D6000	8-719-054-89	DIODE D15XB60	40/46V2000	
949		G2A	DIODE		D6002	8-719-404-50	DIODE MA111-TX	40/46V2000	
950		G2A	DIODE		D6003	8-719-404-50	DIODE MA111-TX	40/46V2000	
951		G2A	DIODE		D6102	6-500-137-01	DIODE BAT54HT1	40/46V2000	
952		G2A	DIODE		D6103	8-719-979-64	DIODE UF4005/23	40/46V2000	
953		G2A	DIODE		D6104	6-501-043-01	DIODE UMZ16NT106	40/46V2000	
954		G2A	DIODE		D6105	6-501-043-01	DIODE UMZ16NT106	40/46V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
955		G2A	DIODE		D6106	8-719-081-67	DIODE M1FM3	40/46V2000	
956		G2A	DIODE		D6107	8-719-081-67	DIODE M1FM3	40/46V2000	
957		G2A	DIODE		D6108	8-719-041-97	DIODE MA113-(TX)	40/46V2000	
958		G2A	DIODE		D6109	8-719-022-90	DIODE MA8160-M	40/46V2000	
959		G2A	DIODE		D6200	8-719-057-96	DIODE D10SC6M-4012	40/46V2000	
960		G2A	DIODE		D6201	8-719-057-96	DIODE D10SC6M-4012	40/46V2000	
961		G2A	DIODE		D6202	8-719-057-96	DIODE D10SC6M-4012	40/46V2000	
962		G2A	DIODE		D6203	8-719-057-96	DIODE D10SC6M-4012	40/46V2000	
963		G2A	DIODE		D6204	6-500-567-31	DIODE 10ERB20-TB3	40/46V2000	
964		G2A	DIODE		D6205	6-500-567-31	DIODE 10ERB20-TB3	40/46V2000	
965		G2A	DIODE		D6207	8-719-057-96	DIODE D10SC6M-4012	40/46V2000	
966		G2A	DIODE		D6208	8-719-057-96	DIODE D10SC6M-4012	40/46V2000	
967		G2A	DIODE		D6302	6-500-567-31	DIODE 10ERB20-TB3	40/46V2000	
968		G2A	DIODE		D6303	6-500-567-31	DIODE 10ERB20-TB3	40/46V2000	
969		G2A	DIODE		D6304	6-500-849-01	DIODE ERA22-08KFLB	40/46V2000	
970		G2A	DIODE		D6305	6-500-567-31	DIODE 10ERB20-TB3	40/46V2000	
971		G2A	DIODE		D6306	8-719-510-02	DIODE D1NS4	40/46V2000	
972		G2A	DIODE		D6401	8-719-404-50	DIODE MA111-TX	40/46V2000	
973		G2A	DIODE		D6402	8-719-404-50	DIODE MA111-TX	40/46V2000	
974		G2A	DIODE		D6406	8-719-404-50	DIODE MA111-TX	40/46V2000	
975		G2A	DIODE		D6407	8-719-018-01	DIODE MA8220-TX	40/46V2000	
976		G2A	DIODE		D6408	8-719-404-50	DIODE MA111-TX	40/46V2000	
977		G2A	DIODE		D6452	8-719-404-50	DIODE MA111-TX	40/46V2000	
978		G2A	DIODE		D6456	8-719-404-50	DIODE MA111-TX	40/46V2000	
979		G2A	DIODE		D6504	8-719-404-50	DIODE MA111-TX	40/46V2000	
980		G2A	DIODE		D6505	8-719-421-82	DIODE MA8043-M	40/46V2000	
981		G2A	DIODE		D6506	8-719-054-59	DIODE FSF05A60	40/46V2000	
982		G2A	DIODE		D6507	8-719-404-50	DIODE MA111-TX	40/46V2000	
983		G2A	DIODE		D6508	6-500-108-01	DIODE EP05FA20	40/46V2000	
984		G2A	DIODE		D6509	6-500-108-01	DIODE EP05FA20	40/46V2000	
985		G2A	DIODE		D6510	6-500-137-01	DIODE BAT54HT1	40/46V2000	
986		G2A	DIODE		D6511	8-719-404-50	DIODE MA111-TX	40/46V2000	
987		G2A	DIODE		D6512	8-719-404-50	DIODE MA111-TX	40/46V2000	
988		G2A	DIODE		D6551	8-719-404-50	DIODE MA111-TX	40/46V2000	
989		G2A	DIODE		D6552	8-719-404-50	DIODE MA111-TX	40/46V2000	
990		G2A	DIODE		D6553	8-719-404-50	DIODE MA111-TX	40/46V2000	
991		G2A	FUSE	△	F6000	1-576-233-51	FUSE 6.3A 250V	40/46V2000	
992		G2A	FERRITE BEAD		FB6100	1-412-911-11	FERRITE 0UH	40/46V2000	
993		G2A	FERRITE BEAD		FB6101	1-412-911-11	FERRITE 0UH	40/46V2000	
994		G2A	IC		IC6100	6-707-749-01	IC CXD9841P	40/46V2000	
995		G2A	IC		IC6200	6-709-368-01	IC MM1431ATT (CN)	40/46V2000	
996		G2A	IC		IC6301	6-708-801-01	IC MIP2H2	40/46V2000	
997		G2A	IC		IC6302	6-709-442-01	IC MM1530ATT	40/46V2000	
998		G2A	IC		IC6401	6-709-368-01	IC MM1431ATT (CN)	40/46V2000	
999		G2A	IC		IC6402	6-709-368-01	IC MM1431ATT (CN)	40/46V2000	
1000		G2A	IC		IC6502	6-709-192-01	IC FA5501AN-D1-TE1	40/46V2000	
1001		G2A	JUMPER READ		JR6001	1-216-295-91	SHORT CHIP 0	40/46V2000	
1002		G2A	JUMPER READ		JR6002	1-216-296-11	SHORT CHIP 0	40/46V2000	
1003		G2A	JUMPER READ		JR6004	1-216-295-91	SHORT CHIP 0	40/46V2000	
1004		G2A	JUMPER READ		JR6005	1-216-296-11	SHORT CHIP 0	40/46V2000	
1005		G2A	JUMPER READ		JR6006	1-216-296-11	SHORT CHIP 0	40/46V2000	
1006		G2A	JUMPER READ		JR6007	1-216-296-11	SHORT CHIP 0	40/46V2000	
1007		G2A	JUMPER READ		JR6008	1-216-296-11	SHORT CHIP 0	40/46V2000	
1008		G2A	JUMPER READ		JR6009	1-216-296-11	SHORT CHIP 0	40/46V2000	
1009		G2A	JUMPER READ		JR6010	1-216-296-11	SHORT CHIP 0	40/46V2000	
1010		G2A	JUMPER READ		JR6011	1-216-295-91	SHORT CHIP 0	40/46V2000	
1011		G2A	JUMPER READ		JR6012	1-216-295-91	SHORT CHIP 0	40/46V2000	
1012		G2A	JUMPER READ		JR6013	1-216-296-11	SHORT CHIP 0	40/46V2000	
1013		G2A	JUMPER READ		JR6014	1-216-296-11	SHORT CHIP 0	40/46V2000	
1014		G2A	COIL		L6000	1-456-856-21	LINE FILTER COIL	40/46V2000	
1015		G2A	COIL		L6203	1-414-487-41	INDUCTOR 1UH	40/46V2000	
1016		G2A	COIL		L6204	1-414-487-41	INDUCTOR 1UH	40/46V2000	
1017		G2A	COIL		L6207	1-457-239-11	INDUCTOR 4.7UH	40/46V2000	
1018		G2A	COIL		L6208	1-457-239-11	INDUCTOR 4.7UH	40/46V2000	
1019		G2A	COIL		L6300	1-414-183-41	INDUCTOR 10UH	40/46V2000	
1020		G2A	COIL		L6500	1-457-218-11	INDUCTOR 100UH	40/46V2000	
1021		G2A	COIL		L6502	1-457-141-21	INDUCTOR 175UH	40/46V2000	
1022		G2A	PHOTO COUPLER	△	PH6000	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	40/46V2000	
1023		G2A	PHOTO COUPLER	△	PH6100	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	40/46V2000	
1024		G2A	PHOTO COUPLER	△	PH6301	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	40/46V2000	
1025		G2A	PHOTO COUPLER	△	PH6400	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	40/46V2000	
1026		G2A	PHOTO COUPLER	△	PH6401	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	40/46V2000	
1027		G2A	PHOTO COUPLER	△	PH6402	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	40/46V2000	
1028		G2A	TRANSISTOR		Q6051	8-729-045-62	TRANSISTOR 2SK2158-T2B	40/46V2000	

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1029		G2A	TRANSISTOR		Q6100	6-551-297-01	TRANSISTOR 2SK3568(LBS1SONY.Q	40/46V2000	
1030		G2A	TRANSISTOR		Q6101	6-551-297-01	TRANSISTOR 2SK3568(LBS1SONY.Q	40/46V2000	
1031		G2A	TRANSISTOR		Q6400	8-729-804-41	TRANSISTOR 2SB1122-S	40/46V2000	
1032		G2A	TRANSISTOR		Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1033		G2A	TRANSISTOR		Q6402	8-729-045-62	TRANSISTOR 2SK2158-T2B	40/46V2000	
1034		G2A	TRANSISTOR		Q6403	8-729-600-22	TRANSISTOR 2SA1235-F	40/46V2000	
1035		G2A	TRANSISTOR		Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1036		G2A	TRANSISTOR		Q6405	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1037		G2A	TRANSISTOR		Q6406	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1038		G2A	TRANSISTOR		Q6408	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1039		G2A	TRANSISTOR		Q6409	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1040		G2A	TRANSISTOR		Q6454	8-729-600-22	TRANSISTOR 2SA1235-F	40/46V2000	
1041		G2A	TRANSISTOR		Q6455	8-729-120-28	TRANSISTOR 2SC1623-L5L6	40/46V2000	
1042		G2A	TRANSISTOR		Q6500	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.	40/46V2000	
1043		G2A	TRANSISTOR		Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST	40/46V2000	
1044		G2A	TRANSISTOR		Q6502	8-729-804-41	TRANSISTOR 2SB1122-S	40/46V2000	
1045		G2A	TRANSISTOR		Q6504	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.	40/46V2000	
1046		G2A	RESISTOR		R6002	1-240-251-11	METAL 6.8 5% 10W	40/46V2000	
1047		G2A	RESISTOR		R6003	1-247-752-11	CARBON 1K 5% 1/2W	40/46V2000	
1048		G2A	RESISTOR		R6004	1-218-835-11	METAL CHIP 330 0.5% 1/10W	40/46V2000	
1049		G2A	RESISTOR		R6051	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1050		G2A	RESISTOR		R6052	1-216-837-11	METAL CHIP 22K 5% 1/10W	40/46V2000	
1051		G2A	RESISTOR		R6101	1-249-385-11	CARBON 2.2 5% 1/4W	40/46V2000	
1052		G2A	RESISTOR		R6102	1-202-933-61	Δ/Ω 0.1 10% 1/2W	40/46V2000	
1053		G2A	RESISTOR		R6103	1-218-823-11	METAL CHIP 100 0.5% 1/10W	40/46V2000	
1054		G2A	RESISTOR		R6104	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	40/46V2000	
1055		G2A	RESISTOR		R6105	1-208-854-11	METAL CHIP 1M 0.5% 1/10W	40/46V2000	
1056		G2A	RESISTOR		R6106	1-208-854-11	METAL CHIP 1M 0.5% 1/10W	40/46V2000	
1057		G2A	RESISTOR		R6107	1-208-854-11	METAL CHIP 1M 0.5% 1/10W	40/46V2000	
1058		G2A	RESISTOR		R6108	1-208-854-11	METAL CHIP 1M 0.5% 1/10W	40/46V2000	
1059		G2A	RESISTOR		R6109	1-218-761-11	METAL CHIP 240K 0.5% 1/10W	40/46V2000	
1060		G2A	RESISTOR		R6110	1-218-881-11	METAL CHIP 27K 0.5% 1/10W	40/46V2000	
1061		G2A	RESISTOR		R6111	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	40/46V2000	
1062		G2A	RESISTOR		R6114	1-211-985-11	METAL CHIP 47 0.5% 1/10W	40/46V2000	
1063		G2A	RESISTOR		R6116	1-216-009-91	RES-CHIP 22 5% 1/10W	40/46V2000	
1064		G2A	RESISTOR		R6117	1-216-009-91	RES-CHIP 22 5% 1/10W	40/46V2000	
1065		G2A	RESISTOR		R6118	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1066		G2A	RESISTOR		R6119	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1067		G2A	RESISTOR		R6121	1-216-361-00	METAL OXIDE 0.22 5% 2W	40/46V2000	
1068		G2A	RESISTOR		R6122	1-216-361-00	METAL OXIDE 0.22 5% 2W	40/46V2000	
1069		G2A	RESISTOR		R6123	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	40/46V2000	
1070		G2A	RESISTOR		R6127	1-216-857-11	METAL CHIP 1M 5% 1/10W	40/46V2000	
1071		G2A	RESISTOR		R6200	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1072		G2A	RESISTOR		R6201	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1073		G2A	RESISTOR		R6202	1-216-105-91	RES-CHIP 220K 5% 1/10W	40/46V2000	
1074		G2A	RESISTOR		R6203	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	40/46V2000	
1075		G2A	RESISTOR		R6204	1-218-843-11	METAL CHIP 680 0.5% 1/10W	40/46V2000	
1076		G2A	RESISTOR		R6205	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	40/46V2000	
1077		G2A	RESISTOR		R6207	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	40/46V2000	
1078		G2A	RESISTOR		R6208	1-249-377-11	CARBON 0.47 5% 1/4W	40/46V2000	
1079		G2A	RESISTOR		R6226	1-249-389-11	CARBON 4.7 5% 1/4W	40/46V2000	
1080		G2A	RESISTOR		R6300	1-212-958-00	FUSIBLE 10 5% 1/2W	40/46V2000	
1081		G2A	RESISTOR		R6301	1-243-725-71	METAL OXIDE 100K 5% 1W	40/46V2000	
1082		G2A	RESISTOR		R6302	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	40/46V2000	
1083		G2A	RESISTOR		R6303	1-249-385-11	CARBON 2.2 5% 1/4W	40/46V2000	
1084		G2A	RESISTOR		R6304	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1085		G2A	RESISTOR		R6305	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	40/46V2000	
1086		G2A	RESISTOR		R6306	1-216-805-11	METAL CHIP 47 5% 1/10W	40/46V2000	
1087		G2A	RESISTOR		R6307	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	40/46V2000	
1088		G2A	RESISTOR		R6308	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	40/46V2000	
1089		G2A	RESISTOR		R6309	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	40/46V2000	
1090		G2A	RESISTOR		R6400	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1091		G2A	RESISTOR		R6401	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	40/46V2000	
1092		G2A	RESISTOR		R6402	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1093		G2A	RESISTOR		R6403	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	40/46V2000	
1094		G2A	RESISTOR		R6405	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	40/46V2000	
1095		G2A	RESISTOR		R6407	1-216-837-11	METAL CHIP 22K 5% 1/10W	40/46V2000	
1096		G2A	RESISTOR		R6408	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	40/46V2000	
1097		G2A	RESISTOR		R6409	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1098		G2A	RESISTOR		R6410	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1099		G2A	RESISTOR		R6412	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1100		G2A	RESISTOR		R6413	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	40/46V2000	
1101		G2A	RESISTOR		R6414	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1102		G2A	RESISTOR		R6415	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	

No.	#	Board	Type	△/°	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1103		G2A	RESISTOR		R6416	1-216-837-11	METAL CHIP 22K 5% 1/10W	40/46V2000	
1104		G2A	RESISTOR		R6417	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1105		G2A	RESISTOR		R6418	1-216-845-11	METAL CHIP 100K 5% 1/10W	40/46V2000	
1106		G2A	RESISTOR		R6419	1-216-837-11	METAL CHIP 22K 5% 1/10W	40/46V2000	
1107		G2A	RESISTOR		R6420	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1108		G2A	RESISTOR		R6421	1-216-864-11	SHORT CHIP 0	40/46V2000	
1109		G2A	RESISTOR		R6422	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	40/46V2000	
1110		G2A	RESISTOR		R6425	1-216-809-11	METAL CHIP 100 5% 1/10W	40/46V2000	
1111		G2A	RESISTOR		R6426	1-216-849-11	METAL CHIP 220K 5% 1/10W	40/46V2000	
1112		G2A	RESISTOR		R6427	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	40/46V2000	
1113		G2A	RESISTOR		R6436	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	40/46V2000	
1114		G2A	RESISTOR		R6437	1-216-821-11	METAL CHIP 1K 5% 1/10W	40/46V2000	
1115		G2A	RESISTOR		R6441	1-216-841-11	METAL CHIP 47K 5% 1/10W	40/46V2000	
1116		G2A	RESISTOR		R6442	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1117		G2A	RESISTOR		R6443	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1118		G2A	RESISTOR		R6444	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1119		G2A	RESISTOR		R6451	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1120		G2A	RESISTOR		R6452	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	40/46V2000	
1121		G2A	RESISTOR		R6453	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1122		G2A	RESISTOR		R6454	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	40/46V2000	
1123		G2A	RESISTOR		R6455	1-218-903-11	METAL CHIP 220K 0.5% 1/10W	40/46V2000	
1124		G2A	RESISTOR		R6456	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	40/46V2000	
1125		G2A	RESISTOR		R6459	1-218-885-11	METAL CHIP 39K 0.5% 1/10W	40/46V2000	
1126		G2A	RESISTOR		R6461	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1127		G2A	RESISTOR		R6462	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1128		G2A	RESISTOR		R6468	1-218-903-11	METAL CHIP 220K 0.5% 1/10W	40/46V2000	
1129		G2A	RESISTOR		R6503	1-215-882-00	METAL OXIDE 22 5% 2W	40/46V2000	
1130		G2A	RESISTOR		R6512	1-218-907-11	METAL CHIP 330K 0.5% 1/10W	40/46V2000	
1131		G2A	RESISTOR		R6513	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	40/46V2000	
1132		G2A	RESISTOR		R6514	1-218-895-11	METAL CHIP 100K 0.5% 1/10W	40/46V2000	
1133		G2A	RESISTOR		R6515	1-218-823-11	METAL CHIP 100 0.5% 1/10W	40/46V2000	
1134		G2A	RESISTOR		R6526	1-211-989-11	METAL CHIP 68 0.5% 1/10W	40/46V2000	
1135		G2A	RESISTOR		R6527	1-218-913-91	METAL CHIP 560K 0.5% 1/10W	40/46V2000	
1136		G2A	RESISTOR		R6528	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	40/46V2000	
1137		G2A	RESISTOR		R6529	1-216-864-11	SHORT CHIP 0	40/46V2000	
1138		G2A	RESISTOR		R6530	1-219-729-61	METAL 0.33 10% 5W	40/46V2000	
1139		G2A	RESISTOR		R6531	1-219-729-61	METAL 0.33 10% 5W	40/46V2000	
1140		G2A	RESISTOR		R6532	1-216-864-11	SHORT CHIP 0	40/46V2000	
1141		G2A	RESISTOR		R6533	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1142		G2A	RESISTOR		R6534	1-218-823-11	METAL CHIP 100 0.5% 1/10W	40/46V2000	
1143		G2A	RESISTOR		R6535	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1144		G2A	RESISTOR		R6536	1-218-830-11	METAL CHIP 200 0.5% 1/10W	40/46V2000	
1145		G2A	RESISTOR		R6537	1-249-389-11	CARBON 4.7 5% 1/4W	40/46V2000	
1146		G2A	RESISTOR		R6538	1-249-405-11	CARBON 100 5% 1/4W	40/46V2000	
1147		G2A	RESISTOR		R6539	1-218-830-11	METAL CHIP 200 0.5% 1/10W	40/46V2000	
1148		G2A	RESISTOR		R6540	1-249-389-11	CARBON 4.7 5% 1/4W	40/46V2000	
1149		G2A	RESISTOR		R6541	1-208-818-11	METAL CHIP 33K 0.5% 1/10W	40/46V2000	
1150		G2A	RESISTOR		R6542	1-208-814-91	METAL CHIP 22K 0.5% 1/10W	40/46V2000	
1151		G2A	RESISTOR		R6543	1-218-830-11	METAL CHIP 200 0.5% 1/10W	40/46V2000	
1152		G2A	RESISTOR		R6544	1-218-830-11	METAL CHIP 200 0.5% 1/10W	40/46V2000	
1153		G2A	RESISTOR		R6545	1-208-848-11	METAL CHIP 560K 0.5% 1/10W	40/46V2000	
1154		G2A	RESISTOR		R6546	1-208-848-11	METAL CHIP 560K 0.5% 1/10W	40/46V2000	
1155		G2A	RESISTOR		R6547	1-208-848-11	METAL CHIP 560K 0.5% 1/10W	40/46V2000	
1156		G2A	RESISTOR		R6548	1-208-846-11	METAL CHIP 470K 0.5% 1/10W	40/46V2000	
1157		G2A	RESISTOR		R6549	1-208-844-11	METAL CHIP 390K 0.5% 1/10W	40/46V2000	
1158		G2A	RESISTOR		R6550	1-218-875-11	METAL CHIP 15K 0.5% 1/10W	40/46V2000	
1159		G2A	RESISTOR		R6551	1-249-393-11	CARBON 10 5% 1/4W	40/46V2000	
1160		G2A	RESISTOR		R6552	1-216-809-11	METAL CHIP 100 5% 1/10W	40/46V2000	
1161		G2A	RESISTOR		R6553	1-208-830-11	METAL CHIP 100K 0.5% 1/10W	40/46V2000	
1162		G2A	RESISTOR		R6554	1-218-911-11	METAL CHIP 470K 0.5% 1/10W	40/46V2000	
1163		G2A	RESISTOR		R6555	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	40/46V2000	
1164		G2A	RESISTOR		R6557	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W	40/46V2000	
1165		G2A	RESISTOR		R6560	1-218-911-11	METAL CHIP 470K 0.5% 1/10W	40/46V2000	
1166		G2A	RESISTOR		R6562	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	40/46V2000	
1167		G2A	RESISTOR		R6563	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	40/46V2000	
1168		G2A	RESISTOR		R6564	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	40/46V2000	
1169		G2A	RESISTOR		R6565	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	40/46V2000	
1170		G2A	RESISTOR		R6566	1-216-833-11	METAL CHIP 10K 5% 1/10W	40/46V2000	
1171		G2A	RELAY	△	RY6003	1-755-579-11	RELAY, POWER	40/46V2000	
1172		G2A	TRANSFORMER	△	T6102	1-443-983-11	CONVERTER TRANSFORMER (PIT)	40/46V2000	
1173		G2A	TRANSFORMER	△	T6103	1-443-982-11	CONVERTER TRANSFORMER (PIT)	40/46V2000	
1174		G2A	TRANSFORMER	△	T6301	1-443-984-11	CONVERTER TRANSFORMER (SBT)	40/46V2000	
1175		G2A	VARISTOR		VD6000	1-804-996-21	VARISTOR	40/46V2000	
1176		G2A	VARISTOR		VD6001	1-804-996-21	VARISTOR	40/46V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1177		AG	CAPACITOR		C2013	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1178		AG	CAPACITOR		C2015	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1179		AG	CAPACITOR		C2016	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1180		AG	CAPACITOR		C2017	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1181		AG	CAPACITOR		C2018	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1182		AG	CAPACITOR		C2019	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1183		AG	CAPACITOR		C2020	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1184		AG	CAPACITOR		C2021	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1185		AG	CAPACITOR		C2023	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1186		AG	CAPACITOR		C2024	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1187		AG	CAPACITOR		C2025	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1188		AG	CAPACITOR		C2026	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1189		AG	CAPACITOR		C2030	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1190		AG	CAPACITOR		C6001	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1191		AG	CAPACITOR		C6003	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1192		AG	CAPACITOR		C6005	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1193		AG	CAPACITOR		C6006	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1194		AG	CAPACITOR		C6009	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V		
1195		AG	CAPACITOR		C6011	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1196		AG	CAPACITOR		C6014	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1197		AG	CAPACITOR		C6015	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1198		AG	CAPACITOR		C6016	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V		
1199		AG	CAPACITOR		C6017	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1200		AG	CAPACITOR		C6018	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V		
1201		AG	CAPACITOR		C6019	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1202		AG	CAPACITOR		C6020	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1203		AG	CAPACITOR		C6022	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V		
1204		AG	CAPACITOR		C6023	1-128-995-21	ELECT CHIP 100UF 20% 10V		
1205		AG	CAPACITOR		C6024	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1206		AG	CAPACITOR		C6025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1207		AG	CAPACITOR		C6026	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1208		AG	CAPACITOR		C6027	1-117-681-11	ELECT CHIP 100UF 20.00% 16V		
1209		AG	CAPACITOR		C7004	1-162-906-11	CERAMIC CHIP 1.5PF 0.25PF 50V		
1210		AG	CAPACITOR		C7005	1-162-906-11	CERAMIC CHIP 1.5PF 0.25PF 50V		
1211		AG	CAPACITOR		C7007	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1212		AG	CAPACITOR		C7010	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1213		AG	CAPACITOR		C7011	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1214		AG	CAPACITOR		C7012	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1215		AG	CAPACITOR		C7013	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1216		AG	CAPACITOR		C7014	1-162-962-11	CERAMIC CHIP 470PF 10.00% 50V		
1217		AG	CAPACITOR		C7015	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1218		AG	CAPACITOR		C7017	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1219		AG	CAPACITOR		C7018	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1220		AG	CAPACITOR		C7019	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1221		AG	CAPACITOR		C7020	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1222		AG	CAPACITOR		C7021	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1223		AG	CAPACITOR		C7023	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1224		AG	CAPACITOR		C7024	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1225		AG	CAPACITOR		C7025	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1226		AG	CAPACITOR		C7027	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1227		AG	CAPACITOR		C7028	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1228		AG	CAPACITOR		C7029	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1229		AG	CAPACITOR		C7030	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1230		AG	CAPACITOR		C7033	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1231		AG	CAPACITOR		C7034	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1232		AG	CAPACITOR		C7035	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1233		AG	CAPACITOR		C7036	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1234		AG	CAPACITOR		C7037	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1235		AG	CAPACITOR		C7038	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1236		AG	CAPACITOR		C7039	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1237		AG	CAPACITOR		C7040	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1238		AG	CAPACITOR		C7042	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1239		AG	CAPACITOR		C7043	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1240		AG	CAPACITOR		C7044	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1241		AG	CAPACITOR		C7045	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1242		AG	CAPACITOR		C7046	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1243		AG	CAPACITOR		C7047	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1244		AG	CAPACITOR		C7048	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1245		AG	CAPACITOR		C7049	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1246		AG	CAPACITOR		C7050	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1247		AG	CAPACITOR		C7051	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1248		AG	CAPACITOR		C7052	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1249		AG	CAPACITOR		C7053	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1250		AG	CAPACITOR		C7054	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1251		AG	CAPACITOR		C7055	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
1252		AG	CAPACITOR		C7056	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1253		AG	CAPACITOR		C7057	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1254		AG	CAPACITOR		C7060	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1255		AG	CAPACITOR		C7061	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1256		AG	CAPACITOR		C7062	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1257		AG	CAPACITOR		C7063	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1258		AG	CAPACITOR		C7064	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1259		AG	CAPACITOR		C7065	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1260		AG	CAPACITOR		C7072	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
1261		AG	CAPACITOR		C7073	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1262		AG	CAPACITOR		C7075	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1263		AG	CAPACITOR		C7076	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1264		AG	CAPACITOR		C7082	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1265		AG	CAPACITOR		C7083	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V		
1266		AG	CAPACITOR		C7086	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1267		AG	CAPACITOR		C7087	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1268		AG	CAPACITOR		C7088	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1269		AG	CAPACITOR		C7089	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1270		AG	CAPACITOR		C7090	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1271		AG	CAPACITOR		C7091	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1272		AG	CAPACITOR		C7092	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1273		AG	CAPACITOR		C7093	1-164-217-11	CERAMIC CHIP 150PF 5.00% 50V		
1274		AG	CAPACITOR		C7094	1-164-217-11	CERAMIC CHIP 150PF 5.00% 50V		
1275		AG	CAPACITOR		C7095	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1276		AG	CAPACITOR		C7096	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1277		AG	CAPACITOR		C7097	1-164-217-11	CERAMIC CHIP 150PF 5.00% 50V		
1278		AG	CAPACITOR		C7098	1-164-217-11	CERAMIC CHIP 150PF 5.00% 50V		
1279		AG	CAPACITOR		C7099	1-162-965-11	CERAMIC CHIP 0.0015UF 10.00% 50V		
1280		AG	CAPACITOR		C7100	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1281		AG	CAPACITOR		C7101	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1282		AG	CAPACITOR		C7102	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1283		AG	CAPACITOR		C7103	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1284		AG	CAPACITOR		C7104	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1285		AG	CAPACITOR		C7105	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1286		AG	CAPACITOR		C7106	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1287		AG	CAPACITOR		C7107	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1288		AG	CAPACITOR		C7108	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V		
1289		AG	CAPACITOR		C7109	1-162-959-11	CERAMIC CHIP 330PF 5.00% 50V		
1290		AG	CAPACITOR		C7110	1-162-959-11	CERAMIC CHIP 330PF 5.00% 50V		
1291		AG	CAPACITOR		C7111	1-162-959-11	CERAMIC CHIP 330PF 5.00% 50V		
1292		AG	CAPACITOR		C7112	1-162-959-11	CERAMIC CHIP 330PF 5.00% 50V		
1293		AG	CAPACITOR		C7113	1-112-797-11	ELECT CHIP 470UF 20% 25V		
1294		AG	CAPACITOR		C7114	1-112-800-11	ELECT CHIP 100UF 20% 35V		
1295		AG	CAPACITOR		C7115	1-112-800-11	ELECT CHIP 100UF 20% 35V		
1296		AG	CAPACITOR		C7116	1-112-800-11	ELECT CHIP 100UF 20% 35V		
1297		AG	CAPACITOR		C7117	1-112-800-11	ELECT CHIP 100UF 20% 35V		
1298		AG	CAPACITOR		C7118	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1299		AG	CAPACITOR		C7119	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1300		AG	CAPACITOR		C7120	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1301		AG	CAPACITOR		C7121	1-100-912-11	CERAMIC CHIP 1UF 10% 25V		
1302		AG	CAPACITOR		C7123	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1303		AG	CAPACITOR		C7124	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1304		AG	CAPACITOR		C7125	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1305		AG	CAPACITOR		C7126	1-125-827-91	CERAMIC CHIP 1UF 10.00% 25V		
1306		AG	CAPACITOR		C7127	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
1307		AG	CAPACITOR		C7128	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
1308		AG	CAPACITOR		C7147	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
1309		AG	CAPACITOR		C7148	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1310		AG	CAPACITOR		C7600	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1311		AG	CAPACITOR		C7601	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1312		AG	CAPACITOR		C7602	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1313		AG	CAPACITOR		C7603	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1314		AG	CAPACITOR		C7604	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1315		AG	CAPACITOR		C7605	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1316		AG	CAPACITOR		C7609	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1317		AG	CAPACITOR		C7610	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1318		AG	CAPACITOR		C7611	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1319		AG	CAPACITOR		C7612	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1320		AG	CAPACITOR		C7613	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1321		AG	CAPACITOR		C7614	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1322		AG	CAPACITOR		C7615	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1323		AG	CAPACITOR		C7616	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1324		AG	CAPACITOR		C7617	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1325		AG	CAPACITOR		C7618	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
1326		AG	CAPACITOR		C7619	1-100-597-91	CERAMIC CHIP 0.1UF 10% 25V		
1327		AG	CAPACITOR		C9005	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1328		AG	CAPACITOR		C9008	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1329		AG	CAPACITOR		C9014	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1330		AG	CAPACITOR		C9015	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1331		AG	CAPACITOR		C9016	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		
1332		AG	CAPACITOR		C9019	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1333		AG	CAPACITOR		C9020	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1334		AG	CAPACITOR		C9021	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1335		AG	CAPACITOR		C9022	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1336		AG	CAPACITOR		C9023	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1337		AG	CAPACITOR		C9024	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1338		AG	CAPACITOR		C9032	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1339		AG	CAPACITOR		C9302	1-128-396-11	ELECT CHIP 470UF 20% 10V		
1340		AG	CAPACITOR		C9307	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1341		AG	CAPACITOR		C9308	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1342		AG	CAPACITOR		C9309	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1343		AG	CAPACITOR		C9310	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1344		AG	CAPACITOR		C9311	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
1345		AG	CAPACITOR		C9501	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1346		AG	CAPACITOR		C9502	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1347		AG	CAPACITOR		C9512	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1348		AG	CAPACITOR		C9700	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1349		AG	CAPACITOR		C9701	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1350		AG	CAPACITOR		C9702	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1351		AG	CAPACITOR		C9704	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		
1352		AG	CAPACITOR		C9706	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1353		AG	CAPACITOR		C9707	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V		
1354		AG	CAPACITOR		C9708	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1355		AG	CAPACITOR		C9709	1-126-204-11	ELECT CHIP 47UF 20.00% 16V		
1356		AG	CONNECTOR		CN7000	1-819-461-11	HEADER ASSEMBLY FOR PWB 4P		
1357		AG	CONNECTOR		CN7001	1-780-148-11	CLIP, SHIELD		
1358		AG	CONNECTOR		CN7002	1-780-148-11	CLIP, SHIELD		
1359		AG	CONNECTOR		CN7503	1-820-211-11	HEADER ASSEMBLY FOR PWB 5P		
1360		AG	CONNECTOR		CN9001	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P		
1361		AG	CONNECTOR		CN9501	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P		
1362		AG	CONNECTOR		CN9502	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P		
1363		AG	CONNECTOR		CN9521	1-780-336-11	EARTH TERMINAL		
1364		AG	CONNECTOR		CN9522	1-780-336-11	EARTH TERMINAL		
1365		AG	CONNECTOR		CN9523	1-780-336-11	EARTH TERMINAL		
1366		AG	CONNECTOR		CN9700	1-819-476-11	HEADER ASSEMBLY FOR PWB 8P		
1367		AG	CONNECTOR	*	CN9701	1-818-714-21	HEADER ASSEMBLY 20P		
1368		AG	CONNECTOR		CN9702	1-820-183-11	HEADER ASSEMBLY (PRINT PWB) 6P		
1369		AG	DIODE		D6001	8-719-058-24	DIODE RB501V-40TE-17		
1370		AG	DIODE		D7001	6-500-551-01	DIODE MM3Z11VT1		
1371		AG	DIODE		D7004	8-719-050-37	DIODE M1MA152WA-T1		
1372		AG	DIODE		D7005	8-719-081-97	DIODE MMDL914T1		
1373		AG	DIODE		D7006	8-719-081-97	DIODE MMDL914T1		
1374		AG	DIODE		D7007	8-719-081-97	DIODE MMDL914T1		
1375		AG	DIODE		D7009	6-500-884-01	DIODE P6SMBJ30A-5		
1376		AG	DIODE		D7010	6-500-884-01	DIODE P6SMBJ30A-5		
1377		AG	DIODE		D7011	6-500-884-01	DIODE P6SMBJ30A-5		
1378		AG	DIODE		D7012	6-500-884-01	DIODE P6SMBJ30A-5		
1379		AG	DIODE		D7013	8-719-081-97	DIODE MMDL914T1		
1380		AG	DIODE		D7602	8-719-050-37	DIODE M1MA152WA-T1		
1381		AG	DIODE		D7603	8-719-050-37	DIODE M1MA152WA-T1		
1382		AG	DIODE		D7604	8-719-081-97	DIODE MMDL914T1		
1383		AG	DIODE		D7605	8-719-081-97	DIODE MMDL914T1		
1384		AG	DIODE		D9003	8-719-977-28	DIODE DTZ10B		
1385		AG	DIODE		D9004	8-719-977-28	DIODE DTZ10B		
1386		AG	DIODE		D9008	8-719-977-28	DIODE DTZ10B		
1387		AG	DIODE		D9009	8-719-977-28	DIODE DTZ10B		
1388		AG	DIODE		D9012	8-719-977-28	DIODE DTZ10B		
1389		AG	DIODE		D9013	8-719-977-28	DIODE DTZ10B		
1390		AG	DIODE		D9014	8-719-977-28	DIODE DTZ10B		
1391		AG	DIODE		D9015	8-719-977-28	DIODE DTZ10B		
1392		AG	DIODE		D9016	8-719-977-28	DIODE DTZ10B		
1393		AG	DIODE		D9017	8-719-977-28	DIODE DTZ10B		
1394		AG	DIODE		D9018	8-719-977-28	DIODE DTZ10B		
1395		AG	DIODE		D9305	8-719-050-37	DIODE M1MA152WA-T1		
1396		AG	DIODE		D9306	8-719-081-97	DIODE MMDL914T1		
1397		AG	FERRITE BEAD		FB7000	1-400-089-21	FERRITE 0UH		
1398		AG	FERRITE BEAD		FB7001	1-400-089-21	FERRITE 0UH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1399		AG	FERRITE BEAD		FB7002	1-400-089-21	FERRITE 0UH		
1400		AG	FERRITE BEAD		FB7003	1-400-089-21	FERRITE 0UH		
1401		AG	FERRITE BEAD		FB7004	1-400-040-22	FERRITE 0UH		
1402		AG	FERRITE BEAD		FB7005	1-400-040-22	FERRITE 0UH		
1403		AG	FERRITE BEAD		FB9003	1-216-864-11	SHORT CHIP 0		
1404		AG	FERRITE BEAD		FB9100	1-400-089-21	FERRITE 0UH		
1405		AG	FERRITE BEAD		FB9101	1-216-295-91	SHORT CHIP 0		
1406		AG	FERRITE BEAD		FB9700	1-216-864-11	SHORT CHIP 0		
1407		AG	FERRITE BEAD		FB9701	1-216-864-11	SHORT CHIP 0		
1408		AG	FERRITE BEAD		FB9702	1-216-864-11	SHORT CHIP 0		
1409		AG	FERRITE BEAD		FB9703	1-216-864-11	SHORT CHIP 0		
1410		AG	FERRITE BEAD		FB9704	1-216-864-11	SHORT CHIP 0		
1411		AG	FERRITE BEAD		FB9706	1-216-864-11	SHORT CHIP 0		
1412		AG	IC		IC2001	8-752-089-33	IC CXA2069Q-TL		
1413		AG	IC		IC7001	6-709-191-01	IC MSP4410K-QA-D6-501		
1414		AG	IC		IC7003	8-759-278-58	IC NJM4558V-TE2		
1415		AG	IC		IC7007	6-709-285-01	IC M61571AFP-DF0T		
1416		AG	IC		IC7601	8-759-278-58	IC NJM4558V-TE2		
1417		AG	IC		IC7602	8-759-359-49	IC NJM3414AV(TE2)		
1418		AG	IC		IC9700	6-704-353-01	IC SN74LVC2G34DCKR		
1419		AG	JACK		J9001	1-780-271-11	S CONNECTOR BLOCK		
1420		AG	JACK		J9003	1-780-373-11	TERMINAL BOARD		
1421		AG	JACK		J9004	1-819-354-11	PHONO JACK 5P		
1422		AG	JACK		J9301	1-819-387-11	PHONO JACK 3P		
1423		AG	COIL		L2002	1-469-557-21	INDUCTOR 22UH		
1424		AG	COIL		L2003	1-469-555-21	INDUCTOR 10UH		
1425		AG	COIL		L6001	1-469-555-21	INDUCTOR 10UH		
1426		AG	COIL		L7002	1-400-794-21	FERRITE 0UH		
1427		AG	COIL		L7004	1-400-794-21	FERRITE 0UH		
1428		AG	COIL		L7005	1-469-555-21	INDUCTOR 10UH		
1429		AG	COIL		L7006	1-400-794-21	FERRITE 0UH		
1430		AG	COIL		L7007	1-469-555-21	INDUCTOR 10UH		
1431		AG	COIL		L7008	1-481-083-11	INDUCTOR 22UH		
1432		AG	COIL		L7009	1-457-191-11	INDUCTOR 10UH		
1433		AG	COIL		L7010	1-457-191-11	INDUCTOR 10UH		
1434		AG	COIL		L7011	1-216-864-11	SHORT CHIP 0		
1435		AG	COIL		L7012	1-400-794-21	FERRITE 0UH		
1436		AG	COIL		L7013	1-400-794-21	FERRITE 0UH		
1437		AG	COIL		L9301	1-469-555-21	INDUCTOR 10UH		
1438		AG	COIL		L9503	1-400-178-21	FERRITE 0UH		
1439		AG	COIL		L9504	1-400-178-21	FERRITE 0UH		
1440		AG	COIL		L9505	1-400-178-21	FERRITE 0UH		
1441		AG	COIL		L9606	1-216-295-91	SHORT CHIP 0		
1442		AG	COIL		L9700	1-469-555-21	INDUCTOR 10UH		
1443		AG	COIL		L9701	1-469-555-21	INDUCTOR 10UH		
1444		AG	IC LINK	△	PS7001	1-576-958-21	FUSE 4A 24V		
1445		AG	TRANSISTOR		Q2001	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1446		AG	TRANSISTOR		Q2002	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1447		AG	TRANSISTOR		Q2003	8-729-600-22	TRANSISTOR 2SA1235-F		
1448		AG	TRANSISTOR		Q6001	8-729-600-22	TRANSISTOR 2SA1235-F		
1449		AG	TRANSISTOR		Q6002	8-729-600-22	TRANSISTOR 2SA1235-F		
1450		AG	TRANSISTOR		Q6004	8-729-600-22	TRANSISTOR 2SA1235-F		
1451		AG	TRANSISTOR		Q6005	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1452		AG	TRANSISTOR		Q6007	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1453		AG	TRANSISTOR		Q6008	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1454		AG	TRANSISTOR		Q6009	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1455		AG	TRANSISTOR		Q6011	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1456		AG	TRANSISTOR		Q6012	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1457		AG	TRANSISTOR		Q6013	8-729-600-22	TRANSISTOR 2SA1235-F		
1458		AG	TRANSISTOR		Q7000	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1459		AG	TRANSISTOR		Q7001	8-729-600-22	TRANSISTOR 2SA1235-F		
1460		AG	TRANSISTOR		Q7002	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1461		AG	TRANSISTOR		Q7005	8-729-600-22	TRANSISTOR 2SA1235-F		
1462		AG	TRANSISTOR		Q7007	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1463		AG	TRANSISTOR		Q7008	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1464		AG	TRANSISTOR		Q7009	8-729-600-22	TRANSISTOR 2SA1235-F		
1465		AG	TRANSISTOR		Q7010	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1466		AG	TRANSISTOR		Q7011	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1467		AG	TRANSISTOR		Q7012	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1468		AG	TRANSISTOR		Q7013	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1469		AG	TRANSISTOR		Q7014	8-729-600-22	TRANSISTOR 2SA1235-F		
1470		AG	TRANSISTOR		Q7015	8-729-600-22	TRANSISTOR 2SA1235-F		
1471		AG	TRANSISTOR		Q7016	8-729-600-22	TRANSISTOR 2SA1235-F		
1472		AG	TRANSISTOR		Q7017	8-729-600-22	TRANSISTOR 2SA1235-F		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1473		AG	TRANSISTOR		Q7018	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1474		AG	TRANSISTOR		Q7019	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1475		AG	TRANSISTOR		Q7020	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1476		AG	TRANSISTOR		Q7021	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1477		AG	TRANSISTOR		Q7022	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1478		AG	TRANSISTOR		Q7602	8-729-600-22	TRANSISTOR 2SA1235-F		
1479		AG	TRANSISTOR		Q7603	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1480		AG	TRANSISTOR		Q7604	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1481		AG	TRANSISTOR		Q7605	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1482		AG	TRANSISTOR		Q7606	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1483		AG	TRANSISTOR		Q7607	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1484		AG	TRANSISTOR		Q7608	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1485		AG	TRANSISTOR		Q7609	8-729-600-22	TRANSISTOR 2SA1235-F		
1486		AG	TRANSISTOR		Q7610	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1487		AG	TRANSISTOR		Q7611	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1488		AG	TRANSISTOR		Q9301	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1489		AG	TRANSISTOR		Q9302	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		
1490		AG	TRANSISTOR		Q9303	8-729-600-22	TRANSISTOR 2SA1235-F		
1491		AG	TRANSISTOR		Q9304	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1492		AG	TRANSISTOR		Q9305	8-729-029-14	TRANSISTOR DTC144EUA-T106		
1493		AG	TRANSISTOR		Q9306	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1494		AG	TRANSISTOR		Q9307	8-729-120-28	TRANSISTOR 2SC1623-L5L6		
1495		AG	TRANSISTOR		Q9701	8-729-600-22	TRANSISTOR 2SA1235-F		
1496		AG	TRANSISTOR		Q9702	8-729-922-10	TRANSISTOR 2SA1577-QR		
1497		AG	TRANSISTOR		Q9703	8-729-922-10	TRANSISTOR 2SA1577-QR		
1498		AG	TRANSISTOR		Q9704	8-729-922-10	TRANSISTOR 2SA1577-QR		
1499		AG	RESISTOR		R2006	1-216-809-11	METAL CHIP 100 5% 1/10W		
1500		AG	RESISTOR		R2007	1-216-809-11	METAL CHIP 100 5% 1/10W		
1501		AG	RESISTOR		R2019	1-216-809-11	METAL CHIP 100 5% 1/10W		
1502		AG	RESISTOR		R2020	1-216-809-11	METAL CHIP 100 5% 1/10W		
1503		AG	RESISTOR		R2023	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1504		AG	RESISTOR		R2024	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1505		AG	RESISTOR		R2030	1-216-809-11	METAL CHIP 100 5% 1/10W		
1506		AG	RESISTOR		R2037	1-216-817-11	METAL CHIP 470 5% 1/10W		
1507		AG	RESISTOR		R2038	1-216-817-11	METAL CHIP 470 5% 1/10W		
1508		AG	RESISTOR		R2050	1-216-809-11	METAL CHIP 100 5% 1/10W		
1509		AG	RESISTOR		R2051	1-216-817-11	METAL CHIP 470 5% 1/10W		
1510		AG	RESISTOR		R2052	1-216-817-11	METAL CHIP 470 5% 1/10W		
1511		AG	RESISTOR		R2053	1-216-817-11	METAL CHIP 470 5% 1/10W		
1512		AG	RESISTOR		R6001	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1513		AG	RESISTOR		R6002	1-216-809-11	METAL CHIP 100 5% 1/10W		
1514		AG	RESISTOR		R6003	1-216-864-11	SHORT CHIP 0		
1515		AG	RESISTOR		R6004	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1516		AG	RESISTOR		R6007	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1517		AG	RESISTOR		R6008	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
1518		AG	RESISTOR		R6009	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1519		AG	RESISTOR		R6012	1-216-817-11	METAL CHIP 470 5% 1/10W		
1520		AG	RESISTOR		R6013	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1521		AG	RESISTOR		R6014	1-218-889-11	METAL CHIP 56K 0.5% 1/10W		
1522		AG	RESISTOR		R6017	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1523		AG	RESISTOR		R6020	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1524		AG	RESISTOR		R6021	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1525		AG	RESISTOR		R6023	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1526		AG	RESISTOR		R6025	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W		
1527		AG	RESISTOR		R6026	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1528		AG	RESISTOR		R6028	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W		
1529		AG	RESISTOR		R6029	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W		
1530		AG	RESISTOR		R6030	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1531		AG	RESISTOR		R6032	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1532		AG	RESISTOR		R6033	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1533		AG	RESISTOR		R6034	1-216-864-11	SHORT CHIP 0		
1534		AG	RESISTOR		R6037	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1535		AG	RESISTOR		R6039	1-216-815-11	METAL CHIP 330 5% 1/10W		
1536		AG	RESISTOR		R6040	1-216-864-11	SHORT CHIP 0		
1537		AG	RESISTOR		R6051	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1538		AG	RESISTOR		R6052	1-216-809-11	METAL CHIP 100 5% 1/10W		
1539		AG	RESISTOR		R7000	1-216-864-11	SHORT CHIP 0		
1540		AG	RESISTOR		R7001	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1541		AG	RESISTOR		R7003	1-216-864-11	SHORT CHIP 0		
1542		AG	RESISTOR		R7004	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1543		AG	RESISTOR		R7007	1-216-805-11	METAL CHIP 47 5% 1/10W		
1544		AG	RESISTOR		R7010	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1545		AG	RESISTOR		R7011	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1546		AG	RESISTOR		R7012	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	Δ/μ	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1547		AG	RESISTOR		R7014	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1548		AG	RESISTOR		R7015	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1549		AG	RESISTOR		R7017	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1550		AG	RESISTOR		R7018	1-216-864-11	SHORT CHIP 0		
1551		AG	RESISTOR		R7019	1-216-864-11	SHORT CHIP 0		
1552		AG	RESISTOR		R7020	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1553		AG	RESISTOR		R7021	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1554		AG	RESISTOR		R7022	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1555		AG	RESISTOR		R7025	1-216-864-11	SHORT CHIP 0		
1556		AG	RESISTOR		R7031	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
1557		AG	RESISTOR		R7032	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1558		AG	RESISTOR		R7033	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
1559		AG	RESISTOR		R7034	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1560		AG	RESISTOR		R7035	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1561		AG	RESISTOR		R7037	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1562		AG	RESISTOR		R7039	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		
1563		AG	RESISTOR		R7040	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1564		AG	RESISTOR		R7041	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1565		AG	RESISTOR		R7045	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1566		AG	RESISTOR		R7047	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1567		AG	RESISTOR		R7049	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1568		AG	RESISTOR		R7050	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
1569		AG	RESISTOR		R7054	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1570		AG	RESISTOR		R7055	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1571		AG	RESISTOR		R7056	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
1572		AG	RESISTOR		R7057	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1573		AG	RESISTOR		R7059	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1574		AG	RESISTOR		R7061	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1575		AG	RESISTOR		R7062	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W		
1576		AG	RESISTOR		R7063	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W		
1577		AG	RESISTOR		R7064	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1578		AG	RESISTOR		R7066	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1579		AG	RESISTOR		R7067	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1580		AG	RESISTOR		R7087	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1581		AG	RESISTOR		R7088	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1582		AG	RESISTOR		R7093	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1583		AG	RESISTOR		R7101	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1584		AG	RESISTOR		R7102	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1585		AG	RESISTOR		R7103	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		
1586		AG	RESISTOR		R7111	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1587		AG	RESISTOR		R7112	1-216-864-11	SHORT CHIP 0		
1588		AG	RESISTOR		R7113	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1589		AG	RESISTOR		R7114	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1590		AG	RESISTOR		R7115	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1591		AG	RESISTOR		R7116	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1592		AG	RESISTOR		R7117	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1593		AG	RESISTOR		R7118	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1594		AG	RESISTOR		R7119	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1595		AG	RESISTOR		R7120	1-216-864-11	SHORT CHIP 0		
1596		AG	RESISTOR		R7122	1-216-864-11	SHORT CHIP 0		
1597		AG	RESISTOR		R7124	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1598		AG	RESISTOR		R7125	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1599		AG	RESISTOR		R7126	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1600		AG	RESISTOR		R7127	1-218-879-11	METAL CHIP 22K 0.5% 1/10W		
1601		AG	RESISTOR		R7128	1-218-901-11	METAL CHIP 180K 0.5% 1/10W		
1602		AG	RESISTOR		R7129	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1603		AG	RESISTOR		R7130	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1604		AG	RESISTOR		R7131	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
1605		AG	RESISTOR		R7132	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
1606		AG	RESISTOR		R7133	1-218-895-11	METAL CHIP 100K 0.5% 1/10W		
1607		AG	RESISTOR		R7134	1-216-296-11	SHORT CHIP 0		
1608		AG	RESISTOR		R7135	1-216-296-11	SHORT CHIP 0		
1609		AG	RESISTOR		R7136	1-216-296-11	SHORT CHIP 0		
1610		AG	RESISTOR		R7137	1-216-296-11	SHORT CHIP 0		
1611		AG	RESISTOR		R7138	1-216-800-11	METAL CHIP 18 5% 1/10W		
1612		AG	RESISTOR		R7139	1-216-800-11	METAL CHIP 18 5% 1/10W		
1613		AG	RESISTOR		R7140	1-216-800-11	METAL CHIP 18 5% 1/10W		
1614		AG	RESISTOR		R7141	1-216-800-11	METAL CHIP 18 5% 1/10W		
1615		AG	RESISTOR		R7142	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1616		AG	RESISTOR		R7143	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1617		AG	RESISTOR		R7144	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1618		AG	RESISTOR		R7145	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1619		AG	RESISTOR		R7146	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1620		AG	RESISTOR		R7147	1-216-845-11	METAL CHIP 100K 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1621		AG	RESISTOR		R7152	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1622		AG	RESISTOR		R7153	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1623		AG	RESISTOR		R7154	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1624		AG	RESISTOR		R7155	1-216-864-11	SHORT CHIP 0		
1625		AG	RESISTOR		R7156	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1626		AG	RESISTOR		R7158	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1627		AG	RESISTOR		R7600	1-216-864-11	SHORT CHIP 0		
1628		AG	RESISTOR		R7601	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1629		AG	RESISTOR		R7602	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1630		AG	RESISTOR		R7603	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		
1631		AG	RESISTOR		R7604	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		
1632		AG	RESISTOR		R7605	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1633		AG	RESISTOR		R7606	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1634		AG	RESISTOR		R7614	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1635		AG	RESISTOR		R7615	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		
1636		AG	RESISTOR		R7620	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1637		AG	RESISTOR		R7621	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
1638		AG	RESISTOR		R7622	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
1639		AG	RESISTOR		R7623	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		
1640		AG	RESISTOR		R7626	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1641		AG	RESISTOR		R7627	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1642		AG	RESISTOR		R7628	1-218-745-11	METAL CHIP 160K 0.5% 1/10W		
1643		AG	RESISTOR		R7629	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1644		AG	RESISTOR		R7630	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1645		AG	RESISTOR		R7631	1-218-745-11	METAL CHIP 160K 0.5% 1/10W		
1646		AG	RESISTOR		R7632	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1647		AG	RESISTOR		R7633	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1648		AG	RESISTOR		R7634	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1649		AG	RESISTOR		R7635	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1650		AG	RESISTOR		R7636	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1651		AG	RESISTOR		R7637	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1652		AG	RESISTOR		R7639	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1653		AG	RESISTOR		R7641	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1654		AG	RESISTOR		R7642	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1655		AG	RESISTOR		R7643	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1656		AG	RESISTOR		R7644	1-216-813-11	METAL CHIP 220 5% 1/10W		
1657		AG	RESISTOR		R7646	1-216-813-11	METAL CHIP 220 5% 1/10W		
1658		AG	RESISTOR		R7650	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1659		AG	RESISTOR		R7651	1-216-864-11	SHORT CHIP 0		
1660		AG	RESISTOR		R7652	1-216-864-11	SHORT CHIP 0		
1661		AG	RESISTOR		R7653	1-216-864-11	SHORT CHIP 0		
1662		AG	RESISTOR		R7654	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1663		AG	RESISTOR		R7655	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1664		AG	RESISTOR		R7656	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1665		AG	RESISTOR		R7657	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1666		AG	RESISTOR		R7658	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1667		AG	RESISTOR		R7659	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1668		AG	RESISTOR		R7660	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1669		AG	RESISTOR		R7661	1-216-864-11	SHORT CHIP 0		
1670		AG	RESISTOR		R7662	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1671		AG	RESISTOR		R7663	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1672		AG	RESISTOR		R7682	1-216-864-11	SHORT CHIP 0		
1673		AG	RESISTOR		R7683	1-216-864-11	SHORT CHIP 0		
1674		AG	RESISTOR		R7684	1-216-864-11	SHORT CHIP 0		
1675		AG	RESISTOR		R9004	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1676		AG	RESISTOR		R9005	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1677		AG	RESISTOR		R9008	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1678		AG	RESISTOR		R9009	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1679		AG	RESISTOR		R9010	1-216-864-11	SHORT CHIP 0		
1680		AG	RESISTOR		R9011	1-216-864-11	SHORT CHIP 0		
1681		AG	RESISTOR		R9014	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1682		AG	RESISTOR		R9015	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1683		AG	RESISTOR		R9017	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1684		AG	RESISTOR		R9019	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1685		AG	RESISTOR		R9020	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1686		AG	RESISTOR		R9021	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1687		AG	RESISTOR		R9022	1-216-853-11	METAL CHIP 470K 5% 1/10W		
1688		AG	RESISTOR		R9023	1-216-864-11	SHORT CHIP 0		
1689		AG	RESISTOR		R9024	1-216-864-11	SHORT CHIP 0		
1690		AG	RESISTOR		R9025	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1691		AG	RESISTOR		R9029	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1692		AG	RESISTOR		R9030	1-216-864-11	SHORT CHIP 0		
1693		AG	RESISTOR		R9031	1-216-864-11	SHORT CHIP 0		
1694		AG	RESISTOR		R9032	1-218-831-11	METAL CHIP 220 0.5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1695		AG	RESISTOR		R9033	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1696		AG	RESISTOR		R9034	1-216-801-11	METAL CHIP 22 5% 1/10W		
1697		AG	RESISTOR		R9036	1-216-801-11	METAL CHIP 22 5% 1/10W		
1698		AG	RESISTOR		R9037	1-216-801-11	METAL CHIP 22 5% 1/10W		
1699		AG	RESISTOR		R9039	1-218-285-11	METAL CHIP 75 5% 1/10W		
1700		AG	RESISTOR		R9040	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1701		AG	RESISTOR		R9041	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1702		AG	RESISTOR		R9042	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1703		AG	RESISTOR		R9045	1-216-864-11	SHORT CHIP 0		
1704		AG	RESISTOR		R9046	1-216-864-11	SHORT CHIP 0		
1705		AG	RESISTOR		R9057	1-216-809-11	METAL CHIP 100 5% 1/10W		
1706		AG	RESISTOR		R9058	1-216-809-11	METAL CHIP 100 5% 1/10W		
1707		AG	RESISTOR		R9059	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1708		AG	RESISTOR		R9060	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1709		AG	RESISTOR		R9061	1-216-809-11	METAL CHIP 100 5% 1/10W		
1710		AG	RESISTOR		R9062	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1711		AG	RESISTOR		R9063	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1712		AG	RESISTOR		R9064	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1713		AG	RESISTOR		R9065	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1714		AG	RESISTOR		R9066	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1715		AG	RESISTOR		R9067	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1716		AG	RESISTOR		R9078	1-216-809-11	METAL CHIP 100 5% 1/10W		
1717		AG	RESISTOR		R9086	1-216-864-11	SHORT CHIP 0		
1718		AG	RESISTOR		R9087	1-216-864-11	SHORT CHIP 0		
1719		AG	RESISTOR		R9088	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1720		AG	RESISTOR		R9089	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1721		AG	RESISTOR		R9095	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1722		AG	RESISTOR		R9096	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1723		AG	RESISTOR		R9097	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1724		AG	RESISTOR		R9098	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1725		AG	RESISTOR		R9101	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1726		AG	RESISTOR		R9102	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1727		AG	RESISTOR		R9150	1-216-864-11	SHORT CHIP 0		
1728		AG	RESISTOR		R9151	1-216-864-11	SHORT CHIP 0		
1729		AG	RESISTOR		R9152	1-216-864-11	SHORT CHIP 0		
1730		AG	RESISTOR		R9153	1-216-864-11	SHORT CHIP 0		
1731		AG	RESISTOR		R9154	1-216-864-11	SHORT CHIP 0		
1732		AG	RESISTOR		R9155	1-216-864-11	SHORT CHIP 0		
1733		AG	RESISTOR		R9156	1-216-864-11	SHORT CHIP 0		
1734		AG	RESISTOR		R9157	1-216-864-11	SHORT CHIP 0		
1735		AG	RESISTOR		R9158	1-216-864-11	SHORT CHIP 0		
1736		AG	RESISTOR		R9304	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1737		AG	RESISTOR		R9309	1-218-285-11	METAL CHIP 75 5% 1/10W		
1738		AG	RESISTOR		R9312	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1739		AG	RESISTOR		R9315	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1740		AG	RESISTOR		R9318	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1741		AG	RESISTOR		R9319	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1742		AG	RESISTOR		R9320	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
1743		AG	RESISTOR		R9321	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
1744		AG	RESISTOR		R9322	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1745		AG	RESISTOR		R9323	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1746		AG	RESISTOR		R9324	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1747		AG	RESISTOR		R9325	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1748		AG	RESISTOR		R9326	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1749		AG	RESISTOR		R9328	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1750		AG	RESISTOR		R9329	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1751		AG	RESISTOR		R9330	1-216-864-11	SHORT CHIP 0		
1752		AG	RESISTOR		R9331	1-216-864-11	SHORT CHIP 0		
1753		AG	RESISTOR		R9332	1-216-864-11	SHORT CHIP 0		
1754		AG	RESISTOR		R9333	1-216-864-11	SHORT CHIP 0		
1755		AG	RESISTOR		R9334	1-216-864-11	SHORT CHIP 0		
1756		AG	RESISTOR		R9501	1-216-864-11	SHORT CHIP 0		
1757		AG	RESISTOR		R9502	1-216-864-11	SHORT CHIP 0		
1758		AG	RESISTOR		R9506	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		
1759		AG	RESISTOR		R9546	1-216-864-11	SHORT CHIP 0		
1760		AG	RESISTOR		R9547	1-216-864-11	SHORT CHIP 0		
1761		AG	RESISTOR		R9555	1-216-295-91	SHORT CHIP 0		
1762		AG	RESISTOR		R9700	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1763		AG	RESISTOR		R9701	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
1764		AG	RESISTOR		R9702	1-216-809-11	METAL CHIP 100 5% 1/10W		
1765		AG	RESISTOR		R9703	1-216-809-11	METAL CHIP 100 5% 1/10W		
1766		AG	RESISTOR		R9704	1-216-811-11	METAL CHIP 150 5% 1/10W		
1767		AG	RESISTOR		R9705	1-216-811-11	METAL CHIP 150 5% 1/10W		
1768		AG	RESISTOR		R9706	1-216-809-11	METAL CHIP 100 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1769		AG	RESISTOR		R9707	1-216-811-11	METAL CHIP 150 5% 1/10W		
1770		AG	RESISTOR		R9708	1-216-811-11	METAL CHIP 150 5% 1/10W		
1771		AG	RESISTOR		R9710	1-216-809-11	METAL CHIP 100 5% 1/10W		
1772		AG	RESISTOR		R9712	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1773		AG	RESISTOR		R9714	1-216-809-11	METAL CHIP 100 5% 1/10W		
1774		AG	RESISTOR		R9717	1-216-801-11	METAL CHIP 22 5% 1/10W		
1775		AG	RESISTOR		R9718	1-216-811-11	METAL CHIP 150 5% 1/10W		
1776		AG	RESISTOR		R9719	1-216-811-11	METAL CHIP 150 5% 1/10W		
1777		AG	RESISTOR		R9720	1-216-811-11	METAL CHIP 150 5% 1/10W		
1778		AG	RESISTOR		R9721	1-216-811-11	METAL CHIP 150 5% 1/10W		
1779		AG	RESISTOR		R9722	1-216-811-11	METAL CHIP 150 5% 1/10W		
1780		AG	RESISTOR		R9723	1-216-811-11	METAL CHIP 150 5% 1/10W		
1781		AG	RESISTOR		R9724	1-216-809-11	METAL CHIP 100 5% 1/10W		
1782		AG	RESISTOR		R9725	1-216-809-11	METAL CHIP 100 5% 1/10W		
1783		AG	RESISTOR		R9726	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1784		AG	RESISTOR		R9727	1-216-809-11	METAL CHIP 100 5% 1/10W		
1785		AG	RESISTOR		R9728	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1786		AG	RESISTOR		R9729	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1787		AG	VARISTOR		VD9001	8-719-977-28	DIODE DTZ10B		
1788		AG	VARISTOR		VD9002	8-719-977-28	DIODE DTZ10B		
1789		AG	VARISTOR		VD9003	8-719-977-28	DIODE DTZ10B		
1790		AG	VARISTOR		VD9004	8-719-977-28	DIODE DTZ10B		
1791		AG	VARISTOR		VD9005	8-719-977-28	DIODE DTZ10B		
1792		AG	VARISTOR		VD9006	8-719-977-28	DIODE DTZ10B		
1793		AG	VARISTOR		VD9025	1-802-082-11	VARISTOR (SMD)		
1794		AG	VARISTOR		VD9026	1-802-082-11	VARISTOR (SMD)		
1795		AG	VARISTOR		VD9303	1-802-082-11	VARISTOR (SMD)		
1796		AG	VARISTOR		VD9304	1-802-082-11	VARISTOR (SMD)		
1797		AG	VARISTOR		VD9305	1-802-082-11	VARISTOR (SMD)		
1798		AG	CRYSTAL		X7000	1-795-612-11	VIBRATOR, CRYSTAL		
1799		J	CONNECTOR	*	CN400	1-820-180-11	HEADER ASSEMBLY (PRINT PWB) 3P		
1800		J	CONNECTOR		CN401	1-691-550-11	PIN, CONNECTOR (1.5MM)(SMD) 3P		
1801		J	RESISTOR		R400	1-216-809-11	METAL CHIP 100 5% 1/10W		
1802		J	RESISTOR		R401	1-216-809-11	METAL CHIP 100 5% 1/10W		
1803		J	RESISTOR		R402	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1804		J	RESISTOR		R403	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1805		H2	CAPACITOR		C203	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	32/40V2000	
1806		H2	CAPACITOR		C204	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	32/40V2000	
1807		H2	CAPACITOR		C205	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	32/40V2000	
1808		H2	CAPACITOR		C206	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	32/40V2000	
1809		H2	CAPACITOR		C207	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	32/40V2000	
1810		H2	CAPACITOR		C208	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	32/40V2000	
1811		H2	CAPACITOR		C215	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V	32/40V2000	
1812		H2	CONNECTOR		CN201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P	32/40V2000	
1813		H2	DIODE		D201	8-719-083-79	DIODE MM3Z10VT1	32/40V2000	
1814		H2	DIODE		D202	8-719-083-79	DIODE MM3Z10VT1	32/40V2000	
1815		H2	DIODE		D203	8-719-083-79	DIODE MM3Z10VT1	32/40V2000	
1816		H2	DIODE		D204	8-719-083-79	DIODE MM3Z10VT1	32/40V2000	
1817		H2	DIODE		D205	8-719-083-79	DIODE MM3Z10VT1	32/40V2000	
1818		H2	DIODE		D206	8-719-083-79	DIODE MM3Z10VT1	32/40V2000	
1819		H2	JACK		J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)	32/40V2000	
1820		H2	JACK		J202	1-568-267-11	JACK	32/40V2000	
1821		H2	RESISTOR		R202	1-216-864-11	SHORT CHIP 0	32/40V2000	
1822		H2	RESISTOR		R203	1-216-853-11	METAL CHIP 470K 5% 1/10W	32/40V2000	
1823		H2	RESISTOR		R204	1-216-853-11	METAL CHIP 470K 5% 1/10W	32/40V2000	
1824		H2	RESISTOR		R205	1-216-864-11	SHORT CHIP 0	32/40V2000	
1825		H2	RESISTOR		R206	1-216-864-11	SHORT CHIP 0	32/40V2000	
1826		H2	RESISTOR		R207	1-218-831-11	METAL CHIP 220 0.5% 1/10W	32/40V2000	
1827		H2	RESISTOR		R208	1-218-831-11	METAL CHIP 220 0.5% 1/10W	32/40V2000	
1828		H2	RESISTOR		R209	1-218-285-11	METAL CHIP 75 5% 1/10W	32/40V2000	
1829		H2	RESISTOR		R210	1-218-831-11	METAL CHIP 220 0.5% 1/10W	32/40V2000	
1830		H2	RESISTOR		R211	1-218-831-11	METAL CHIP 220 0.5% 1/10W	32/40V2000	
1831		H2	RESISTOR		R212	1-216-864-11	SHORT CHIP 0	32/40V2000	
1832		H2	RESISTOR		R213	1-216-821-11	METAL CHIP 1K 5% 1/10W	32/40V2000	
1833		H2	RESISTOR		R214	1-216-821-11	METAL CHIP 1K 5% 1/10W	32/40V2000	
1834		H2	RESISTOR		R215	1-216-809-11	METAL CHIP 100 5% 1/10W	32/40V2000	
1835		H2	RESISTOR		R216	1-216-809-11	METAL CHIP 100 5% 1/10W	32/40V2000	
1836		H2	RESISTOR		R217	1-216-821-11	METAL CHIP 1K 5% 1/10W	32/40V2000	
1837		H2	RESISTOR		R218	1-216-821-11	METAL CHIP 1K 5% 1/10W	32/40V2000	
1838		H2	RESISTOR		R219	1-216-809-11	METAL CHIP 100 5% 1/10W	32/40V2000	
1839		H2	RESISTOR		R220	1-216-864-11	SHORT CHIP 0	32/40V2000	
1840		H2	RESISTOR		R224	1-218-831-11	METAL CHIP 220 0.5% 1/10W	32/40V2000	
1841		H2	RESISTOR		R225	1-218-831-11	METAL CHIP 220 0.5% 1/10W	32/40V2000	
1842		H2	VARISTOR		VD201	1-802-082-11	VARISTOR (SMD)	32/40V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1843		H2	VARISTOR		VD202	1-802-082-11	VARISTOR (SMD)	32/40V2000	
1844		H2	VARISTOR		VD203	1-802-082-11	VARISTOR (SMD)	32/40V2000	
1845		H4	CAPACITOR		C352	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
1846		H4	CAPACITOR		C353	1-119-667-11	CERAMIC CHIP 22UF 10V		
1847		H4	CAPACITOR		C355	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
1848		H4	CAPACITOR		C357	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1849		H4	CAPACITOR		C358	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
1850		H4	CONNECTOR		CN351	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		
1851		H4	DIODE		D352	8-719-085-26	DIODE CL-165HR/SYG-D-T		
1852		H4	DIODE		D355	8-719-085-26	DIODE CL-165HR/SYG-D-T		
1853		H4	DIODE		D358	6-500-817-01	DIODE (LED) SML-512UWT86		
1854		H4	IC		IC351	6-600-502-01	HIC GP1UE26RK0VF		
1855		H4	IC		IC352	6-600-447-01	IC TPS853(SONY)		
1856		H4	TRANSISTOR		Q351	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1857		H4	TRANSISTOR		Q352	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1858		H4	TRANSISTOR		Q353	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1859		H4	TRANSISTOR		Q354	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1860		H4	TRANSISTOR		Q355	8-729-028-96	TRANSISTOR DTC114EUA-T106		
1861		H4	TRANSISTOR		Q356	8-729-602-36	TRANSISTOR 2SA1602-F		
1862		H4	RESISTOR		R351	1-216-820-11	METAL CHIP 820 5% 1/10W		
1863		H4	RESISTOR		R352	1-216-819-11	METAL CHIP 680 5% 1/10W		
1864		H4	RESISTOR		R353	1-216-820-11	METAL CHIP 820 5% 1/10W		
1865		H4	RESISTOR		R354	1-216-819-11	METAL CHIP 680 5% 1/10W		
1866		H4	RESISTOR		R355	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
1867		H4	RESISTOR		R356	1-216-817-11	METAL CHIP 470 5% 1/10W		
1868		H4	RESISTOR		R357	1-216-805-11	METAL CHIP 47 5% 1/10W		
1869		H4	RESISTOR		R359	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1870		H4	RESISTOR		R360	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1871		H4	RESISTOR		R361	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1872		H4	RESISTOR		R363	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1873		H4	RESISTOR		R364	1-216-849-11	METAL CHIP 220K 5% 1/10W		
1874		H4	RESISTOR		R365	1-216-864-11	SHORT CHIP 0		
1875		H4	RESISTOR		R366	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
1876		H1	CONNECTOR		CN101	1-819-445-11	HEADER ASSEMBLY FOR PWB 3P		
1877		H1	RESISTOR		R101	1-218-848-11	METAL CHIP 1.1K 0.5% 1/10W		
1878		H1	RESISTOR		R102	1-218-841-11	METAL CHIP 560 0.5% 1/10W		
1879		H1	RESISTOR		R103	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
1880		H1	RESISTOR		R104	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1881		H1	RESISTOR		R105	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
1882		H1	SWITCH		S101	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1883		H1	SWITCH		S102	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1884		H1	SWITCH		S103	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1885		H1	SWITCH		S104	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1886		H1	SWITCH		S105	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1887		H1	SWITCH		S106	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1888		H1	SWITCH		S107	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)		
1889		H46	CAPACITOR		C203	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	46V2000	
1890		H46	CAPACITOR		C204	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	46V2000	
1891		H46	CAPACITOR		C205	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	46V2000	
1892		H46	CAPACITOR		C206	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	46V2000	
1893		H46	CAPACITOR		C207	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	46V2000	
1894		H46	CAPACITOR		C208	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V	46V2000	
1895		H46	CAPACITOR		C215	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V	46V2000	
1896		H46	CONNECTOR		CN201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P	46V2000	
1897		H46	DIODE		D201	8-719-977-28	DIODE DTZ10B	46V2000	
1898		H46	DIODE		D202	8-719-977-28	DIODE DTZ10B	46V2000	
1899		H46	DIODE		D203	8-719-977-28	DIODE DTZ10B	46V2000	
1900		H46	DIODE		D204	8-719-977-28	DIODE DTZ10B	46V2000	
1901		H46	DIODE		D205	8-719-977-28	DIODE DTZ10B	46V2000	
1902		H46	DIODE		D206	8-719-977-28	DIODE DTZ10B	46V2000	
1903		H46	JACK		J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)	46V2000	
1904		H46	JACK		J202	1-815-325-11	JACK	46V2000	
1905		H46	RESISTOR		R202	1-216-864-11	SHORT CHIP 0	46V2000	
1906		H46	RESISTOR		R203	1-216-853-11	METAL CHIP 470K 5% 1/10W	46V2000	
1907		H46	RESISTOR		R204	1-216-853-11	METAL CHIP 470K 5% 1/10W	46V2000	
1908		H46	RESISTOR		R205	1-216-864-11	SHORT CHIP 0	46V2000	
1909		H46	RESISTOR		R206	1-216-864-11	SHORT CHIP 0	46V2000	
1910		H46	RESISTOR		R207	1-218-831-11	METAL CHIP 220 0.5% 1/10W	46V2000	
1911		H46	RESISTOR		R208	1-218-831-11	METAL CHIP 220 0.5% 1/10W	46V2000	
1912		H46	RESISTOR		R209	1-218-285-11	METAL CHIP 75 5% 1/10W	46V2000	
1913		H46	RESISTOR		R210	1-218-831-11	METAL CHIP 220 0.5% 1/10W	46V2000	
1914		H46	RESISTOR		R211	1-218-831-11	METAL CHIP 220 0.5% 1/10W	46V2000	
1915		H46	RESISTOR		R212	1-216-864-11	SHORT CHIP 0	46V2000	
1916		H46	RESISTOR		R213	1-216-821-11	METAL CHIP 1K 5% 1/10W	46V2000	

No.	#	Board	Type	△/°	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1917		H46	RESISTOR		R214	1-216-821-11	METAL CHIP 1K 5% 1/10W	46V2000	
1918		H46	RESISTOR		R215	1-216-809-11	METAL CHIP 100 5% 1/10W	46V2000	
1919		H46	RESISTOR		R216	1-216-809-11	METAL CHIP 100 5% 1/10W	46V2000	
1920		H46	RESISTOR		R217	1-216-821-11	METAL CHIP 1K 5% 1/10W	46V2000	
1921		H46	RESISTOR		R218	1-216-821-11	METAL CHIP 1K 5% 1/10W	46V2000	
1922		H46	RESISTOR		R219	1-216-809-11	METAL CHIP 100 5% 1/10W	46V2000	
1923		H46	RESISTOR		R220	1-216-864-11	SHORT CHIP 0	46V2000	
1924		H46	RESISTOR		R224	1-218-831-11	METAL CHIP 220 0.5% 1/10W	46V2000	
1925		H46	RESISTOR		R225	1-218-831-11	METAL CHIP 220 0.5% 1/10W	46V2000	
1926		H46	VARISTOR		VD201	1-802-082-11	VARISTOR (SMD)	46V2000	
1927		H46	VARISTOR		VD202	1-802-082-11	VARISTOR (SMD)	46V2000	
1928		H46	VARISTOR		VD203	1-802-082-11	VARISTOR (SMD)	46V2000	
1929		G1	CAPACITOR		C6101	1-161-964-91	CERAMIC 4700PF F	32V2000	
1930		G1	CAPACITOR		C6104	1-117-697-41	CERAMIC 470PF B	32V2000	
1931		G1	CAPACITOR		C6105	1-165-529-11	PETP FILM 0.22MF	32V2000	
1932		G1	CAPACITOR		C6106	1-165-529-11	PETP FILM 0.22MF	32V2000	
1933		G1	CAPACITOR		C6109	1-117-697-41	CERAMIC 470PF B	32V2000	
1934		G1	CAPACITOR		C6110	1-161-964-91	CERAMIC 4700PF F	32V2000	
1935		G1	CAPACITOR		C6111	1-113-915-91	CERAMIC 1000PF E	32V2000	
1936		G1	CAPACITOR		C6112	1-112-744-52	METALIZED PET FILM 1MF	32V2000	
1937		G1	CAPACITOR		C6115	1-112-744-52	METALIZED PET FILM 1MF	32V2000	
1938		G1	CAPACITOR		C6116	1-112-744-52	METALIZED PET FILM 1MF	32V2000	
1939		G1	CAPACITOR		C6122	1-165-127-91	CERAMIC 470PF	32V2000	
1940		G1	CAPACITOR		C6123	1-165-127-91	CERAMIC 470PF	32V2000	
1941		G1	CAPACITOR		C6125	1-114-134-11	ELECT 180MF	32V2000	
1942		G1	CAPACITOR		C6127	1-162-964-91	CERAMIC CHIP 1000PF B 1608	32V2000	
1943		G1	CAPACITOR		C6129	1-115-339-91	CERAMIC 0.1MF B (2012)	32V2000	
1944		G1	CAPACITOR		C6131	1-115-339-91	CERAMIC 0.1MF B (2012)	32V2000	
1945		G1	CAPACITOR		C6132	1-115-339-91	CERAMIC 0.1MF B (2012)	32V2000	
1946		G1	CAPACITOR		C6133	1-165-127-91	CERAMIC 470PF	32V2000	
1947		G1	CAPACITOR		C6134	1-165-127-91	CERAMIC 470PF	32V2000	
1948		G1	CAPACITOR		C6138	1-107-826-91	CERAMIC CHIP 100000PF B	32V2000	
1949		G1	CAPACITOR		C6139	1-162-927-91	CERAMIC CHIP 100PF CH 1608	32V2000	
1950		G1	CAPACITOR		C6141	1-107-905-91	ELECT 4.7MF	32V2000	
1951		G1	CAPACITOR		C6143	1-107-903-91	ELECT 2.2MF	32V2000	
1952		G1	CAPACITOR		C6144	1-165-127-91	CERAMIC 470PF	32V2000	
1953		G1	CAPACITOR		C6147	1-137-807-31	ELECT 100MF	32V2000	
1954		G1	CAPACITOR		C6149	1-162-964-91	CERAMIC CHIP 1000PF B 1608	32V2000	
1955		G1	CAPACITOR		C6152	1-162-964-91	CERAMIC CHIP 1000PF B 1608	32V2000	
1956		G1	CAPACITOR		C6201	1-127-715-91	CERAMIC CHIP 0.22MF B 1608	32V2000	
1957		G1	CAPACITOR		C6202	1-112-218-21	ELECT 680MF	32V2000	
1958		G1	CAPACITOR		C6203	1-107-882-91	ELECT 100MF	32V2000	
1959		G1	CAPACITOR		C6210	1-127-573-91	CERAMIC CHIP 1MF B (2012)	32V2000	
1960		G1	CAPACITOR		C6212	1-127-573-91	CERAMIC CHIP 1MF B (2012)	32V2000	
1961		G1	CAPACITOR		C6214	1-162-970-91	CERAMIC CHIP 10000PF B 1608	32V2000	
1962		G1	CAPACITOR		C6215	1-100-597-91	CERAMIC CHIP 0.1MF B 1608	32V2000	
1963		G1	CAPACITOR		C6301	1-162-966-91	CERAMIC CHIP 2200PF B 1608	32V2000	
1964		G1	CAPACITOR		C6302	1-162-964-91	CERAMIC CHIP 1000PF B 1608	32V2000	
1965		G1	CAPACITOR		C6303	1-162-970-91	CERAMIC CHIP 10000PF B 1608	32V2000	
1966		G1	CAPACITOR		C6304	1-107-823-91	CERAMIC 470000PF B (2012)	32V2000	
1967		G1	CAPACITOR		C6306	1-115-339-91	CERAMIC 0.1MF B (2012)	32V2000	
1968		G1	CAPACITOR		C6307	1-107-906-91	ELECT 10MF	32V2000	
1969		G1	CAPACITOR		C6308	1-104-962-91	ELECT 47MF	32V2000	
1970		G1	CAPACITOR		C6401	1-107-905-91	ELECT 4.7MF	32V2000	
1971		G1	CAPACITOR		C6402	1-112-242-21	ELECT 1500MF	32V2000	
1972		G1	CAPACITOR		C6403	1-107-907-91	ELECT 22MF	32V2000	
1973		G1	CAPACITOR		C6404	1-112-835-11	ELECT 3300MF	32V2000	
1974		G1	CAPACITOR		C6405	1-100-597-91	CERAMIC CHIP 0.1MF B 1608	32V2000	
1975		G1	CAPACITOR		C6406	1-112-835-11	ELECT 3300MF	32V2000	
1976		G1	CAPACITOR		C6407	1-112-228-21	ELECT 1000MF	32V2000	
1977		G1	CAPACITOR		C6501	1-162-970-91	CERAMIC CHIP 10000PF B 1608	32V2000	
1978		G1	CAPACITOR		C6502	1-115-416-91	CERAMIC CHIP 1000PF CH 1608	32V2000	
1979		G1	CAPACITOR		C6503	1-107-906-91	ELECT 10MF	32V2000	
1980		G1	CAPACITOR		C6504	1-107-907-91	ELECT 22MF	32V2000	
1981		G1	CAPACITOR		C6505	1-100-597-91	CERAMIC CHIP 0.1MF B 1608	32V2000	
1982		G1	CAPACITOR		C6506	1-162-970-91	CERAMIC CHIP 10000PF B 1608	32V2000	
1983		G1	CAPACITOR		C6507	1-107-893-91	ELECT 100MF	32V2000	
1984		G1	CAPACITOR		C6508	1-100-597-91	CERAMIC CHIP 0.1MF B 1608	32V2000	
1985		G1	CAPACITOR		C6509	1-104-962-91	ELECT 47MF	32V2000	
1986		G1	CAPACITOR		C6510	1-115-340-91	CERAMIC 0.22MF B (2012)	32V2000	
1987		G1	CAPACITOR		C6512	1-165-127-91	CERAMIC 470PF	32V2000	
1988		G1	CAPACITOR		C6514	1-128-984-11	METALIZED FILM 0.015MF	32V2000	
1989		G1	CAPACITOR		C6516	1-163-021-91	CERAMIC 10000PF B (2012)	32V2000	
1990		G1	CONNECTOR		CN6101	1-695-915-21	TAB CONTACT	32V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1991		G1	CONNECTOR		CN6102	1-691-960-11	PIN, CONNECTOR 3P	32V2000	
1992		G1	CONNECTOR		CN6201	1-695-915-21	TAB CONTACT	32V2000	
1993		G1	CONNECTOR		CN6202	1-793-236-11	PIN, CONNECTOR 14P	32V2000	
1994		G1	CONNECTOR		CN6203	1-785-708-11	PIN, CONNECTOR 12P	32V2000	
1995		G1	DIODE		D6101	8-719-510-53	DIODE D4SB60L	32V2000	
1996		G1	DIODE		D6102	8-719-081-97	DIODE MMDL914T1	32V2000	
1997		G1	DIODE		D6103	6-500-567-01	DIODE 10ERB20-TA1B2	32V2000	
1998		G1	DIODE		D6104	6-500-567-01	DIODE 10ERB20-TA1B2	32V2000	
1999		G1	DIODE		D6107	8-719-081-97	DIODE MMDL914T1	32V2000	
2000		G1	DIODE		D6114	8-719-054-59	DIODE FSF05A60	32V2000	
2001		G1	DIODE		D6128	8-719-055-18	DIODE ERA22-08TP3	32V2000	
2002		G1	DIODE		D6129	6-500-567-01	DIODE 10ERB20-TA1B2	32V2000	
2003		G1	DIODE		D6130	6-500-567-01	DIODE 10ERB20-TA1B2	32V2000	
2004		G1	DIODE		D6131	6-501-450-01	DIODE 11EFS4-TA1B2	32V2000	
2005		G1	DIODE		D6132	8-719-938-81	DIODE ERA22-06TP5	32V2000	
2006		G1	DIODE		D6133	8-719-081-97	DIODE MMDL914T1	32V2000	
2007		G1	DIODE		D6134	8-719-081-97	DIODE MMDL914T1	32V2000	
2008		G1	DIODE		D6201	8-719-070-51	DIODE 21DQ06-TA2B1	32V2000	
2009		G1	DIODE		D6202	8-719-081-97	DIODE MMDL914T1	32V2000	
2010		G1	DIODE		D6301	8-719-081-97	DIODE MMDL914T1	32V2000	
2011		G1	DIODE	△	D6302	8-719-027-76	DIODE 1SS357-TPH3	32V2000	
2012		G1	DIODE		D6303	8-719-081-97	DIODE MMDL914T1	32V2000	
2013		G1	DIODE		D6304	6-500-022-01	DIODE MM3Z5V1ST1	32V2000	
2014		G1	DIODE		D6305	8-719-081-97	DIODE MMDL914T1	32V2000	
2015		G1	DIODE		D6306	8-719-081-97	DIODE MMDL914T1	32V2000	
2016		G1	DIODE		D6401	6-501-319-01	DIODE FCQ10A06	32V2000	
2017		G1	DIODE		D6402	8-719-074-59	DIODE FCH20A06	32V2000	
2018		G1	DIODE		D6403	8-719-074-59	DIODE FCH20A06	32V2000	
2019		G1	DIODE		D6404	6-500-567-01	DIODE 10ERB20-TA1B2	32V2000	
2020		G1	DIODE		D6405	6-500-567-01	DIODE 10ERB20-TA1B2	32V2000	
2021		G1	DIODE		D6406	8-719-060-88	DIODE D4SBS6	32V2000	
2022		G1	DIODE		D6407	8-719-081-97	DIODE MMDL914T1	32V2000	
2023		G1	DIODE		D6408	8-719-082-04	DIODE MM3Z22VT1	32V2000	
2024		G1	DIODE		D6501	8-719-027-76	DIODE 1SS357-TPH3	32V2000	
2025		G1	DIODE		D6502	8-719-081-97	DIODE MMDL914T1	32V2000	
2026		G1	DIODE	△	D6503	8-719-077-66	DIODE 11EQS03LN-TA1B2	32V2000	
2027		G1	DIODE		D6504	8-719-027-76	DIODE 1SS357-TPH3	32V2000	
2028		G1	DIODE		D6505	6-500-448-11	DIODE D1NF60-TA	32V2000	
2029		G1	DIODE		D6506	8-719-077-66	DIODE 11EQS03LN-TA1B2	32V2000	
2030		G1	DIODE	△	D6507	6-501-043-01	DIODE UMZ16NT106	32V2000	
2031		G1	DIODE		D6508	6-501-043-01	DIODE UMZ16NT106	32V2000	
2032		G1	DIODE		D6514	8-719-081-97	DIODE MMDL914T1	32V2000	
2033		G1	DIODE		D6515	6-500-555-01	DIODE MM3Z27VT1	32V2000	
2034		G1	DIODE		D6516	8-719-082-03	DIODE MM3Z15VT1	32V2000	
2035		G1	FUSE	△	F6101	1-576-231-51	FUSE, H.B.C.	32V2000	
2036		G1	FUSE HOLDER		FH6101	1-533-217-41	FUSE HOLDER	32V2000	
2037		G1	IC		IC6102	6-709-368-01	IC MM1431ATT (CN)	32V2000	
2038		G1	IC		IC6103	6-709-368-01	IC MM1431ATT (CN)	32V2000	
2039		G1	IC		IC6104	6-708-801-01	IC MIP2H2	32V2000	
2040		G1	IC		IC6201	6-709-155-01	IC TS3431BILT	32V2000	
2041		G1	IC	△	IC6301	6-709-192-01	IC FA5501AN-D1-TE1	32V2000	
2042		G1	IC		IC6401	6-709-368-01	IC MM1431ATT (CN)	32V2000	
2043		G1	IC	△	IC6501	6-706-852-01	IC CXD9841M	32V2000	
2044		G1	INDUCTOR		L6102	1-481-065-11	INDUCTOR (CH CHP32A012) 330UH	32V2000	
2045		G1	INDUCTOR		L6103	1-400-876-21	INDUCTOR (CH ALS050100) 100UH	32V2000	
2046		G1	INDUCTOR		L6204	1-412-521-41	INDUCTOR 4.7UH	32V2000	
2047		G1	INDUCTOR		L6401	1-400-596-21	INDUCTOR (SL810C1R0) 1.0UH	32V2000	
2048		G1	INDUCTOR		L6402	1-400-596-21	INDUCTOR (SL810C1R0) 1.0UH	32V2000	
2049		G1	INDUCTOR		L6403	1-400-597-11	INDUCTOR (CH STP-01090) 2.2UH	32V2000	
2050		G1	TRANSFORMER		LF6101	1-443-947-31	LINE FILTER (RBIA-883225NP)	32V2000	
2051		G1	TRANSFORMER		LF6102	1-443-947-31	LINE FILTER (RBIA-883225NP)	32V2000	
2052		G1	PHOTO COUPLER		PH6101	6-600-276-01	PHOTO COUPLER PS2561AL1-1-V-W	32V2000	
2053		G1	PHOTO COUPLER		PH6102	6-600-276-01	PHOTO COUPLER PS2561AL1-1-V-W	32V2000	
2054		G1	PHOTO COUPLER		PH6103	6-600-276-01	PHOTO COUPLER PS2561AL1-1-V-W	32V2000	
2055		G1	PHOTO COUPLER		PH6104	6-600-276-01	PHOTO COUPLER PS2561AL1-1-V-W	32V2000	
2056		G1	PHOTO COUPLER		PH6501	6-600-276-01	PHOTO COUPLER PS2561AL1-1-V-W	32V2000	
2057		G1	IC LINK	△	PS6201	1-533-597-32	IC LINK	32V2000	
2058		G1	IC LINK	△	PS6202	1-533-597-32	IC LINK	32V2000	
2059		G1	TRANSISTOR	△	Q6101	8-729-141-50	TRANSISTOR 2SB624T1-BV345	32V2000	
2060		G1	TRANSISTOR	△	Q6102	6-551-303-01	TRANSISTOR 2SK3683-01MR-F111	32V2000	
2061		G1	TRANSISTOR		Q6106	8-729-620-33	TRANSISTOR 2SA1235TP-1EF	32V2000	
2062		G1	TRANSISTOR		Q6107	8-729-010-25	TRANSISTOR MSD601-RT1	32V2000	
2063		G1	TRANSISTOR		Q6108	8-729-920-79	TRANSISTOR 2SB1132-T100-QR	32V2000	
2064		G1	TRANSISTOR		Q6109	8-729-038-23	TRANSISTOR RT1N141C-TP-1	32V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2065		G1	TRANSISTOR		Q6201	8-729-045-62	TRANSISTOR 2SK2158-T2B	32V2000	
2066		G1	TRANSISTOR		Q6202	8-729-620-33	TRANSISTOR 2SA1235TP-1EF	32V2000	
2067		G1	TRANSISTOR		Q6203	8-729-045-62	TRANSISTOR 2SK2158-T2B	32V2000	
2068		G1	TRANSISTOR		Q6204	8-729-010-25	TRANSISTOR MSD601-RT1	32V2000	
2069		G1	TRANSISTOR		Q6205	8-729-010-25	TRANSISTOR MSD601-RT1	32V2000	
2070		G1	TRANSISTOR		Q6501	8-729-038-23	TRANSISTOR RT1N141C-TP-1	32V2000	
2071		G1	TRANSISTOR	△	Q6502	6-551-465-01	TRANSISTOR 2SK3561(SONY,Q	32V2000	
2072		G1	TRANSISTOR	△	Q6503	6-551-465-01	TRANSISTOR 2SK3561(SONY,Q	32V2000	
2073		G1	RESISTOR	△	R6102	1-240-251-91	METAL CEMENT 6.8	32V2000	
2074		G1	RESISTOR		R6103	1-240-576-21	RES-CHIP 470K (2012)	32V2000	
2075		G1	RESISTOR		R6104	1-240-576-21	RES-CHIP 470K (2012)	32V2000	
2076		G1	RESISTOR		R6108	1-240-576-21	RES-CHIP 470K (2012)	32V2000	
2077		G1	RESISTOR		R6109	1-240-576-21	RES-CHIP 470K (2012)	32V2000	
2078		G1	RESISTOR		R6110	1-240-572-21	RES-CHIP 220K (2012)	32V2000	
2079		G1	RESISTOR		R6111	1-216-109-91	CHIP 330K (2012)	32V2000	
2080		G1	RESISTOR		R6113	1-216-077-91	CHIP 15K (2012)	32V2000	
2081		G1	RESISTOR		R6114	1-249-397-61	CARBON 22	32V2000	
2082		G1	RESISTOR		R6115	1-216-817-91	CHIP 470 (1608)	32V2000	
2083		G1	RESISTOR	△	R6118	1-249-389-61	CARBON 4.7	32V2000	
2084		G1	RESISTOR		R6122	1-216-833-91	CHIP 10K (1608)	32V2000	
2085		G1	RESISTOR	△	R6123	1-246-028-31	METAL 0.15	32V2000	
2086		G1	RESISTOR		R6131	1-215-882-51	METALIZED FILM 22	32V2000	
2087		G1	RESISTOR		R6132	1-208-840-91	CHIP 270K (2012)	32V2000	
2088		G1	RESISTOR		R6133	1-208-840-91	CHIP 270K (2012)	32V2000	
2089		G1	RESISTOR		R6134	1-208-840-91	CHIP 270K (2012)	32V2000	
2090		G1	RESISTOR		R6135	1-208-840-91	CHIP 270K (2012)	32V2000	
2091		G1	RESISTOR		R6136	1-208-838-91	CHIP 220K (2012)	32V2000	
2092		G1	RESISTOR		R6137	1-215-882-51	METALIZED FILM 22	32V2000	
2093		G1	RESISTOR		R6152	1-216-833-91	CHIP 10K (1608)	32V2000	
2094		G1	RESISTOR		R6154	1-216-833-91	CHIP 10K (1608)	32V2000	
2095		G1	RESISTOR		R6155	1-216-073-91	CHIP 10K (2012)	32V2000	
2096		G1	RESISTOR		R6157	1-216-825-91	CHIP 2.2K (1608)	32V2000	
2097		G1	RESISTOR		R6158	1-247-871-91	CARBON 47K	32V2000	
2098		G1	RESISTOR		R6162	1-216-065-91	CHIP 4.7K (2012)	32V2000	
2099		G1	RESISTOR		R6166	1-245-185-21	CHIP 5.6K (1608)	32V2000	
2100		G1	RESISTOR		R6169	1-220-926-21	FUSIBLE RESISTOR 0.47	32V2000	
2101		G1	RESISTOR		R6170	1-218-642-51	METALIZED FILM 100K	32V2000	
2102		G1	RESISTOR		R6172	1-249-385-61	CARBON 2.2	32V2000	
2103		G1	RESISTOR		R6173	1-216-821-91	CHIP 1.0K (1608)	32V2000	
2104		G1	RESISTOR		R6176	1-208-854-91	CHIP 1M (2012)	32V2000	
2105		G1	RESISTOR		R6177	1-208-854-91	CHIP 1M (2012)	32V2000	
2106		G1	RESISTOR		R6178	1-208-854-91	CHIP 1M (2012)	32V2000	
2107		G1	RESISTOR		R6179	1-208-854-91	CHIP 1M (2012)	32V2000	
2108		G1	RESISTOR		R6180	1-208-838-91	CHIP 220K (2012)	32V2000	
2109		G1	RESISTOR		R6181	1-208-838-91	CHIP 220K (2012)	32V2000	
2110		G1	RESISTOR		R6184	1-215-869-81	METALIZED FILM 1K	32V2000	
2111		G1	RESISTOR		R6185	1-216-073-91	CHIP 10K (2012)	32V2000	
2112		G1	RESISTOR		R6186	1-216-065-91	CHIP 4.7K (2012)	32V2000	
2113		G1	RESISTOR		R6187	1-216-829-91	CHIP 4.7K (1608)	32V2000	
2114		G1	RESISTOR		R6188	1-218-879-91	CHIP 22K (1608)	32V2000	
2115		G1	RESISTOR		R6189	1-218-879-91	CHIP 22K (1608)	32V2000	
2116		G1	RESISTOR		R6190	1-216-073-91	CHIP 10K (2012)	32V2000	
2117		G1	RESISTOR		R6191	1-216-065-91	CHIP 4.7K (2012)	32V2000	
2118		G1	RESISTOR		R6201	1-216-821-91	CHIP 1.0K (1608)	32V2000	
2119		G1	RESISTOR		R6202	1-216-825-91	CHIP 2.2K (1608)	32V2000	
2120		G1	RESISTOR		R6203	1-216-827-91	CHIP 3.3K (1608)	32V2000	
2121		G1	RESISTOR		R6207	1-216-821-91	CHIP 1.0K (1608)	32V2000	
2122		G1	RESISTOR		R6208	1-216-829-91	CHIP 4.7K (1608)	32V2000	
2123		G1	RESISTOR		R6209	1-218-885-91	CHIP 39K (1608)	32V2000	
2124		G1	RESISTOR		R6210	1-218-871-91	CHIP 10K (1608)	32V2000	
2125		G1	RESISTOR		R6211	1-218-867-91	CHIP 6.8K (1608)	32V2000	
2126		G1	RESISTOR		R6214	1-216-821-91	CHIP 1.0K (1608)	32V2000	
2127		G1	RESISTOR		R6215	1-216-837-91	CHIP 22K (1608)	32V2000	
2128		G1	RESISTOR		R6216	1-216-837-91	CHIP 22K (1608)	32V2000	
2129		G1	RESISTOR		R6218	1-216-833-91	CHIP 10K (1608)	32V2000	
2130		G1	RESISTOR		R6219	1-216-073-91	CHIP 10K (2012)	32V2000	
2131		G1	RESISTOR	△	R6220	1-216-793-91	CHIP 4.7 (1608)	32V2000	
2132		G1	RESISTOR		R6226	1-216-837-91	CHIP 22K (1608)	32V2000	
2133		G1	RESISTOR		R6227	1-216-049-91	CHIP 1.0K (2012)	32V2000	
2134		G1	RESISTOR		R6228	1-216-837-91	CHIP 22K (1608)	32V2000	
2135		G1	RESISTOR		R6229	1-216-833-91	CHIP 10K (1608)	32V2000	
2136		G1	RESISTOR		R6230	1-247-831-91	CARBON 1.0K	32V2000	
2137		G1	RESISTOR		R6232	1-216-833-91	CHIP 10K (1608)	32V2000	
2138		G1	RESISTOR		R6233	1-216-837-91	CHIP 22K (1608)	32V2000	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2139		G1	RESISTOR		R6301	1-245-227-21	CHIP 330K (1608)	32V2000	
2140		G1	RESISTOR		R6302	1-218-877-91	CHIP 18K (1608)	32V2000	
2141		G1	RESISTOR		R6303	1-216-097-91	CHIP 100K (2012)	32V2000	
2142		G1	RESISTOR		R6305	1-216-851-91	CHIP 330K (1608)	32V2000	
2143		G1	RESISTOR		R6306	1-216-837-91	CHIP 22K (1608)	32V2000	
2144		G1	RESISTOR		R6307	1-216-845-91	CHIP 100K (1608)	32V2000	
2145		G1	RESISTOR		R6308	1-216-864-91	SHORT CHIP (1608)	32V2000	
2146		G1	RESISTOR		R6309	1-216-809-91	CHIP 100 (1608)	32V2000	
2147		G1	RESISTOR		R6310	1-249-389-61	CARBON 4.7	32V2000	
2148		G1	RESISTOR	△	R6311	1-216-001-91	CHIP 10 (2012)	32V2000	
2149		G1	RESISTOR		R6312	1-216-801-91	CHIP 22 (1608)	32V2000	
2150		G1	RESISTOR		R6313	1-208-804-91	CHIP 8.2K (2012)	32V2000	
2151		G1	RESISTOR		R6314	1-208-766-91	CHIP 220 (2012)	32V2000	
2152		G1	RESISTOR		R6315	1-216-295-91	SHORT CHIP (2012)	32V2000	
2153		G1	RESISTOR		R6318	1-208-816-91	CHIP 27K (2012)	32V2000	
2154		G1	RESISTOR		R6319	1-208-822-91	CHIP 47K (2012)	32V2000	
2155		G1	RESISTOR		R6401	1-216-829-91	CHIP 4.7K (1608)	32V2000	
2156		G1	RESISTOR		R6403	1-249-377-61	CARBON 0.47	32V2000	
2157		G1	RESISTOR		R6404	1-216-073-91	CHIP 10K (2012)	32V2000	
2158		G1	RESISTOR		R6405	1-216-841-91	CHIP 47K (1608)	32V2000	
2159		G1	RESISTOR		R6406	1-218-845-91	CHIP 820 (1608)	32V2000	
2160		G1	RESISTOR		R6407	1-218-865-91	CHIP 5.6K (1608)	32V2000	
2161		G1	RESISTOR		R6408	1-216-073-91	CHIP 10K (2012)	32V2000	
2162		G1	RESISTOR		R6409	1-247-847-91	CARBON 4.7K	32V2000	
2163		G1	RESISTOR		R6411	1-218-847-91	CHIP 1.0K (1608)	32V2000	
2164		G1	RESISTOR		R6412	1-216-833-91	CHIP 10K (1608)	32V2000	
2165		G1	RESISTOR		R6413	1-249-389-61	CARBON 4.7	32V2000	
2166		G1	RESISTOR		R6502	1-216-845-91	CHIP 100K (1608)	32V2000	
2167		G1	RESISTOR		R6503	1-216-073-91	CHIP 10K (2012)	32V2000	
2168		G1	RESISTOR		R6504	1-249-385-61	CARBON 2.2	32V2000	
2169		G1	RESISTOR	△	R6505	1-220-926-21	FUSIBLE RESISTOR 0.47	32V2000	
2170		G1	RESISTOR		R6506	1-218-871-91	CHIP 10K (1608)	32V2000	
2171		G1	RESISTOR		R6509	1-245-135-21	CHIP 47 (1608)	32V2000	
2172		G1	RESISTOR		R6511	1-216-793-91	CHIP 4.7 (1608)	32V2000	
2173		G1	RESISTOR		R6512	1-216-009-91	CHIP 22 (2012)	32V2000	
2174		G1	RESISTOR		R6513	1-216-009-91	CHIP 22 (2012)	32V2000	
2175		G1	RESISTOR		R6514	1-245-167-21	CHIP 1.0K (1608)	32V2000	
2176		G1	RESISTOR		R6515	1-216-833-91	CHIP 10K (1608)	32V2000	
2177		G1	RESISTOR		R6516	1-216-833-91	CHIP 10K (1608)	32V2000	
2178		G1	RESISTOR		R6517	1-246-028-31	METAL 0.15	32V2000	
2179		G1	RESISTOR		R6529	1-216-121-91	CHIP 1.0M (2012)	32V2000	
2180		G1	RELAY		RY6101	1-755-488-11	RELAY (LKP1AF-18V)	32V2000	
2181		G1	TRANSFORMER	△	T6102	1-443-896-11	CONVERTER TRANSFORMER (CVT TSE25A046)	32V2000	
2182		G1	TRANSFORMER	△	T6501	1-443-897-11	CONVERTER TRANSFORMER (CVT TSE35A045)	32V2000	
2183		G1	VARISTOR		VDR6101	1-804-996-21	VARISTOR	32V2000	
2184		G1	VARISTOR		VDR6102	1-804-996-21	VARISTOR	32V2000	

